

Ferrule Type

TDC10, TDC11 and TDC120



CATALOG SYMBOL: TDC10


FAST-ACTING

1/4" x 1-1/4"

BRITISH STANDARD APPROVAL; BS2950

AVAILABLE ONLY IN BULK QUANTITIES

INTERRUPTING RATING = 10 TIMES RATED CURRENT

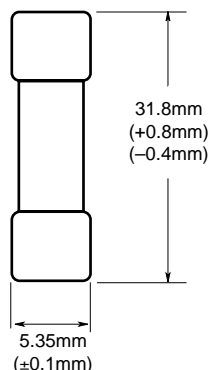


Electrical Ratings (Catalog Symbol and Amperes)

1000 Volts AC	750 Volts AC	250 Volts AC	100 Volts AC
TDC10-50mA	TDC10-500mA	TDC10-1.5A	TDC10-10A
TDC10-60mA	500 Volts AC	TDC10-2A	32 Volts AC
TDC10-100mA	TDC10-750mA	TDC10-3A	TDC10-12A
TDC10-150mA	350 Volts AC	TDC10-5A	TDC10-15A
TDC10-250mA	TDC10-1A	150 Volts AC	TDC10-20A
—	—	TDC10-7A	TDC10-25A

- Glass.
- For instruments, electronic circuits, and small appliances.
- Mount in Buss HTB panel mounted, HB series PC board fuseholders, HHB and HFB in-line fuseholders, and Series 8000 fuseblocks.
- Complies with British Standard BS-2950A.

Envelope Characteristic Curves

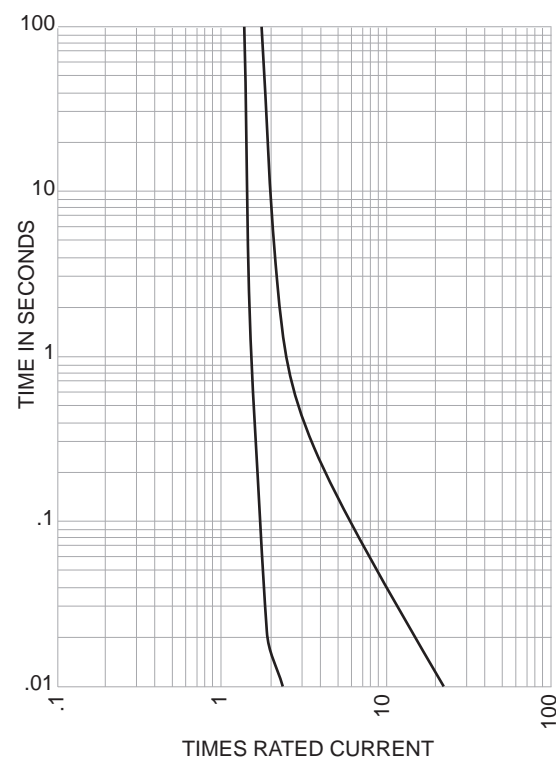

CE logo denotes compliance with European Union Low Voltage Directive (50-1000V AC, 75-1500V DC). Contact Bussmann Application Engineering at 314-527-1270 for more information.



CATALOG SYMBOL: TDC120

FAST-ACTING

10mm x 26mm

BRITISH STANDARD APPROVAL; BS1361

ASTA APPROVAL

IEC 269-3

16,500 AIC

AVAILABLE ONLY IN BULK QUANTITIES

Electrical Ratings (Catalog Symbol and Amperes)

240 Volts AC

TDC120-15A

Ferrule Type

TDC10, TDC11 and TDC120



CATALOG SYMBOL: TDC11

TIME LAG

1/4" x 1-1/4"

AVAILABLE ONLY IN BULK QUANTITIES


INTERRUPTING RATING = 10 TIMES RATED CURRENT

Electrical Ratings (Catalog Symbol and Amperes)

1000 Volts AC	750 Volts AC	250 Volts AC	150 Volts AC
TDC11-50mA	TDC11-500mA	TDC11-1.5A	TDC11-7A
TDC11-60mA	500 Volts AC	TDC11-2A	100 Volts AC
TDC11-100mA	TDC11-750mA	TDC11-3A	TDC11-10A
TDC11-150mA	350 Volts AC	TDC11-5A	—
TDC11-250mA	TDC11-1A	—	—
—	—	—	—

- Glass.
- For circuits with high inrush currents.
- Mount in Buss HTB panel mounted, HB series PC board fuseholders, HHB and HFB in-line fuseholders, and Series 8000 fuseblocks.

Envelope Characteristic Curves

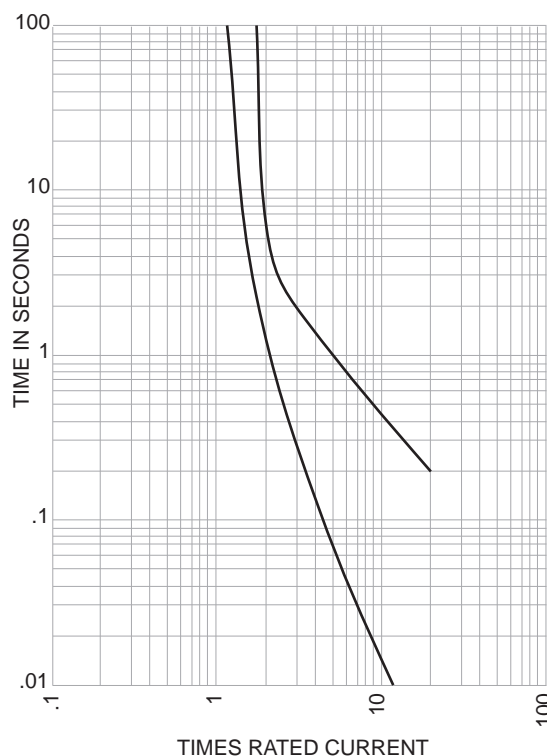

The only controlled copy of this BIF document is the electronic read-only version located on the Bussmann Network Drive. All other copies of this BIF document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.