

Series TB400 Double Row Terminal Blocks

SPECIFICATIONS


Rating: 75A, 600V*
 * 75A max. with pressure terminal connector and #4 AWG;
 30A max. with #10 AWG;
 Center Spacing: .687" or 11/16" (17.45 mm)
 Wire Size: #10-14 AWG CU
 Screw Size: #10-32 philslot screws
 Torque Rating: 20 in-lb.
 Distance Between Barriers: .56" (14.3 mm)
 Mounting: #10 screws
 Material: Molded base: Black, UL rated 94VO thermoplastic
 Terminal plating: Tin over brass; Screws: Zinc plated steel
 Operating Temperature: 130°C (260°F) max., -40°C (-40°F) min.
 Breakdown Voltage: 7500V rms
 Approvals: UL E62622; CSA LR15364; IEC Compliance;
 CE Certified



TB400-05

Poles	A	B	Poles	A	B	Poles	A	B
02	2.51	2.06	06	5.26	4.81	10	8.01	7.56
03	3.20	2.75	07	5.95	5.50	11	8.70	8.25
04	3.89	3.44	08	6.64	6.19	12	9.39	8.94
05	4.58	4.13	09	7.33	6.88			

* Dimensions in inches. To convert to millimeters, multiply by 25.4.

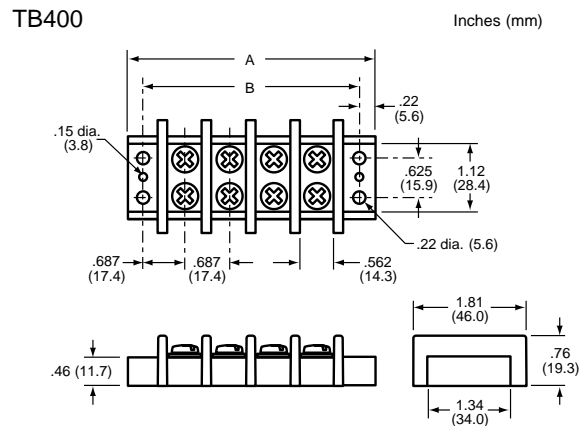

Screw Options



B
Brass Philslot
Nickel Plated



ST
Stainless Steel
Philslot

Part Numbering System

Series	Poles	Screw Options	Marking	Hardware Options
TB400	- nn 02 to 12	nn Blank - std. screws 00 - screws shipped bulk B - brass philslot, nickel plated ST - stainless steel, philslot	Not available	Not available