

















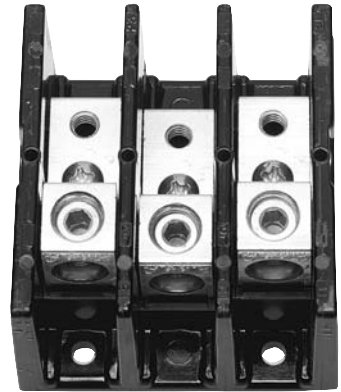


Power/Splicer Stud Blocks

600 Volts

Specifications:

- Connector, High Conductive Aluminum, Tin Plated
- Stud, Brass, Tin Plated
- Quick Connect, Brass, Tin Plated
- 10-32 Screw, Brass, Nickel Plated
- Amp Rating Based on NEC Table 310-16 Using 75° C Copper Wire
- *Wire Connector Rated 90° C
- UL Recognized File No. E62806
- CSA Certified File No. LR19766
- C€ (does not apply to 143X559)



Catalog#	Poles	Amps	Material	Connector Configuration	Line Wire Range	Openings Per Pole	Connector Configuration	Load Wire Range	Openings Per Pole
1411200	1	115	Thermoplastic		#2-#14AWG	1		10-32 Screw	1
1412200	2								
1413200	3								
1414200	4								
1411201	1	115	Thermoplastic		#2-#14AWG	1		10-32 Tapped Hole	1
1412201	2								
1413201	3								
1414201	4								
1411202	1	115	Thermoplastic		#2-#14AWG	1		.25X.032 Qk Cnct	4
1412202	2								
1413202	3								
1414202	4								
1411203	1	115	Thermoplastic		#2-#14AWG	1		10-32 X .60 Stud	1
1412203	2								
1413203	3								
1414203	4								
1411205	1	115	Thermoplastic		#2-#14AWG	1		#10-32 Hole & (2) QC	1
1412205	2								
1413205	3								
1414205	4								
1411301	1	115	Thermoplastic		#2-#14AWG	1		#2-#14AWG & (1) QC	1
1412301	2								
1413301	3								
1414301	4								
1431559	1	310	Phenolic		350kcmil-#6AWG	1		3/8-16 X 11/8 Stud	1
1432559	2								
1433559	3								
1421411	1	175	Phenolic	* 	2/0-#14AWG	1		M6 Hole	1
1422411	2								
1423411	3								
1421553	1	175	Phenolic	* 	2/0-#14AWG	1		1/4-20 Tapped Hole	1
1422553	2								
1423553	3								

