

Ferrule

**FWK 750V 5-60A**

Electrical Characteristics				Ordering Information				Dimensions	Curves
Size	Rated Current RMS-Amps	I <sup>2</sup> t (A <sup>2</sup> S)		Watts Loss	Part Number	Carton Qty.	Carton Weight (kg)	Figure Number	See Page or (BIF #)
		Pre-arc	Clearing at 750 Vdc						
20 x 127mm (13/16")	5	8.5	16	—	FWK-5A20F	10	0.95	Fig. 1	page 95 (35785031)
	8	50	100	—	FWK-8A20F				
	10	95	200	—	FWK-10A20F				
	15	100	240	—	FWK-15A20F				
	20	125	315	—	FWK-20A20F				
	25	400	1100	—	FWK-25A20F				
25 x 146mm (1")	30	800	2600	—	FWK-30A20F	10	1.65	Fig. 2	page 95 (35785031)
	35	1300	4300	—	FWK-35A25F				
	40	1600	5300	—	FWK-40A25F				
	50	3100	12000	—	FWK-50A25F				
	60	5900	24000	—	FWK-60A25F				

- Interrupting rating 45kA RMS symmetrical.
  - 750 Vdc rating for 5 through 60 amperes (Time constant = 10-15 mS).
- 1 kg = 2.2 lbs. 1 lb = 0.45 kg

**Dimensions**

Fig. 1: 5-30 Amp Range


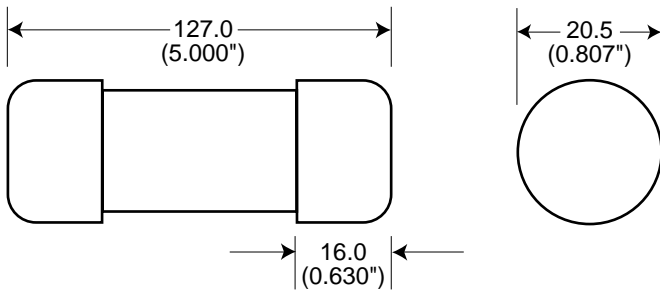


Fig. 2: 35-60 Amp Range

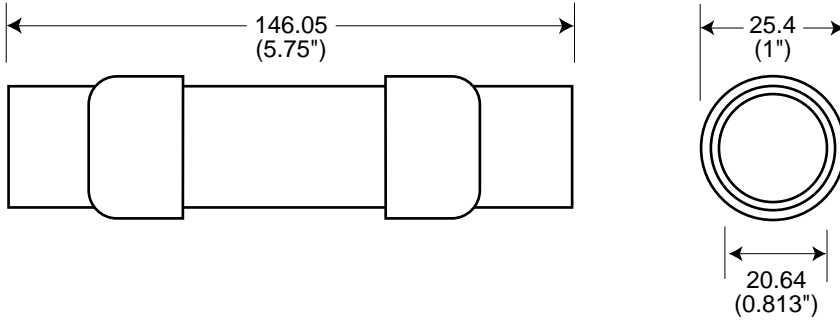

Dimension in mm.  
1mm = 0.0394" 1" = 25.4mm

The only controlled copy of this BIF document is the electronic read-only version located on the Bussmann Network Drive. All other copies of this document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.