


Single Row Terminal Blocks

Kulka® 2690 Series 300 Volts



2697 GP/ 2699 GP/ 2697A GP/ 2699A GP/ 2698A GP/ 2698 GP

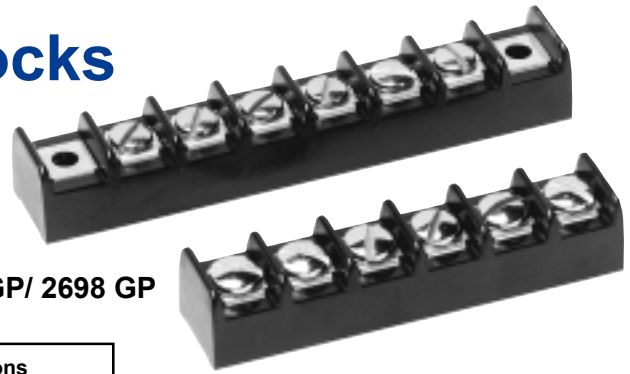

# of Terms	Dimensions		# of Terms	Dimensions	
	A	B		A	B
1	----	----	14	5.69	6.22
2	0.44	0.97	15	6.13	6.66
3	0.88	1.41	16	6.56	7.09
4	1.31	1.84	17	7.00	7.53
5	1.75	2.28	18	7.44	7.97
6	2.19	2.72	19	7.88	8.41
7	2.63	3.16	20	8.31	8.84
8	3.06	3.59	21	8.75	9.28
9	3.50	4.03	22	9.19	9.72
10	3.94	4.47	23	9.63	10.16
11	4.38	4.91	24	10.06	10.59
12	4.81	5.34	25	10.50	11.03
13	5.25	5.78			

Definition Barrier Ends:

2697 = #6 - 32 Screw, Printed Circuit Width = .062
 2699 = #6 - 32 Screw, Printed Circuit Width = .093
 2697A = #8 - 32 Screw, Printed Circuit Width = .062
 2699A = #8 - 32 Screw, Printed Circuit Width = .093
 2698A = #8 - 32 Screw, Solder Turret
 2698 = #6 - 32 Screw, Solder Turret

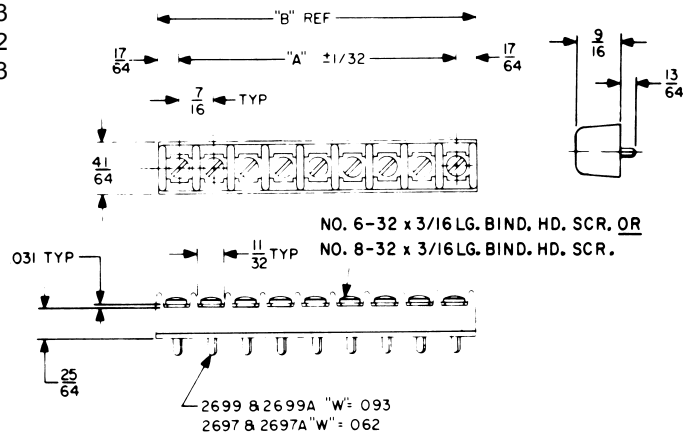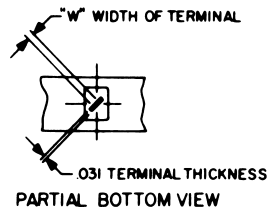

Hardware Options:

KT 28 = Full Quick Connect (0° Flat) .187
 KT 29 = Full Quick Connect (45° Bend) .187
 KT 30 = Full Quick Connect (90° Bend) .187

 ST = Full Solder
 J600 = Line to Line Jumper
 3/4 ST = Half Solder

 KT 52 = Half Quick Connect (0° Flat) .250
 KT 53 = Half Quick Connect (45° Bend) .250
 KT 54 = Half Quick Connect (90° Bend) .250

KT 34 = Half Quick Connect (0° Flat) .187
 KT 35 = Half Quick Connect (45° Bend) .187
 KT 36 = Half Quick Connect (90° Bend) .187

 KT 46 = Full Quick Connect (0° Flat) .250
 KT 47 = Full Quick Connect (45° Bend) .250
 KT 48 = Full Quick Connect (90° Bend) .250

 Z = Lug Over the Side (.344)
 YZ = Lug Over the Side (.609)

Single Row Terminal Blocks

Kulka® 2690 Series 300 Volts



Specifications:

Base, General Purpose Phenolic, 150° C
Screws, #6 - 32 Binder Head, Slotted or 8 - 32 Binder Head, Slotted
7/16" Centers
Terminals, Plated Brass
Wire Range #14 - #16 AWG - 20 Amps
The Suitability of These Devices for Greater Currents Shall Be
Determined in the End-Use Application.
UL Recognized File No. E47811
CSA Certified File No. LR19766
CE

2694 GP/ 2696 GP/ 2694A GP/ 2696A GP/ 2695A GP/ 2695 GP

# of Terms	Dimensions		# of Terms	Dimensions	
	A	B		A	B
1	0.88	1.41	13	6.13	6.66
2	1.31	1.84	14	6.56	7.09
3	1.75	2.28	15	7.00	7.53
4	2.19	2.72	16	7.44	7.97
5	2.63	3.16	17	7.88	8.41
6	3.06	3.59	18	8.31	8.84
7	3.50	4.03	19	8.75	9.28
8	3.94	4.47	20	9.19	9.72
9	4.38	4.91	21	9.63	10.16
10	4.81	5.34	22	10.06	10.59
11	5.25	5.78	23	10.50	11.03
12	5.69	6.22			

Definition Mount Ends:

2694 = #6 - 32 Screw, Printed Circuit Width = .062
2696 = #6 - 32 Screw, Printed Circuit Width = .093
2694A = #8 - 32 Screw, Printed Circuit Width = .062
2696A = #8 - 32 Screw, Printed Circuit Width = .093
2695A = #8 - 32 Screw, Solder Turret
2695 = #6 - 32 Screw, Solder Turret

