

SERIES 87

5,0mm Eurostyle® Pluggable PCB Header, Closed Ends

Description


The series 87 Eurostyle® headers on 5,0mm (.197") spacing are polarized using the industry standard design, and are mateable with Beau 87 series plugs, most competitive 5,0mm plugs.

Series 87 headers are available in vertical or horizontal configurations, 2-24 circuits, with and without threaded retention inserts.

Made in the USA, in our ISO 9001 certified facility, all Eurostyle® terminal blocks embody the highest quality standards in the industry - using the finest materials and world class manufacturing processes. They meet or exceed all applicable industry standards.

Features

- **Industry-standard interface.** Series 87 headers are intermateable with competitive 5,0mm pluggable terminal blocks. They offer the industry standard polarizing and keying design.
- **High flammability rating.** 94V-0 is the highest available rating for the insulator - better than other leading brands.



PRODUCT RATINGS

UL	Class B	15 Amps @ 300 V
	Class C	10 Amps @ 300 V
CSA	Class B	15 Amps @ 300 V
VDE 0110 Gr.C		12 Amps @ 250 V

APPROVALS

UL	File No. E48521
	Guide No. XCFR2
CSA	File No. 025562

TECHNICAL SPECIFICATIONS

ELECTRICAL	
DWV	4500 VDC
IR	>5000 Megohms

ENVIRONMENTAL	
Operating temp	-55° to +105° C

MATERIALS

Insulator	Nylon 6.6, UL94V-0, black
Header pins	Brass, tin plate

OPTIONS


-10A	Sequential numbering
-G30	30 µ in. gold plated terminals

HOW TO ORDER

8	7	X	X	X	X	-	X	X
SERIES		STYLE		NO. OF POLES		OPTIONS		
		16						
		19		2 to 24		(Dash#'s above)		


SERIES 87

Style 16

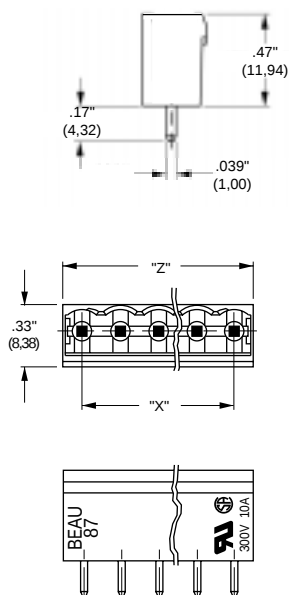

Part	X		Z	
Number	in	mm	in	mm
871602	.20	5,0	.45	11,3
871603	.39	10,0	.64	16,3
871604	.59	15,0	.84	21,3
871605	.79	20,0	1.04	26,3
871606	.99	25,0	1.23	31,3
871607	1.18	30,0	1.45	36,9
871608	1.38	35,0	1.65	41,9
871609	1.58	40,0	1.85	46,9
871610	1.77	45,0	2.05	51,9
871611	1.97	50,0	2.24	56,9
871612	2.17	55,0	2.44	62,0
871613	2.36	60,0	2.64	67,0
871614	2.56	65,0	2.83	72,0
871615	2.76	70,0	3.03	77,0
871616	2.95	75,0	3.23	82,0
871617	3.15	80,0	3.42	87,0
871618	3.35	85,0	3.62	92,0
871619	3.55	90,0	3.82	97,0
871620	3.74	95,0	4.01	102,0
871621	3.94	100,0	4.21	107,0
871622	4.14	105,0	4.41	112,0
871623	4.33	110,0	4.61	117,0
871624	4.53	115,0	4.80	122,0

Style 19

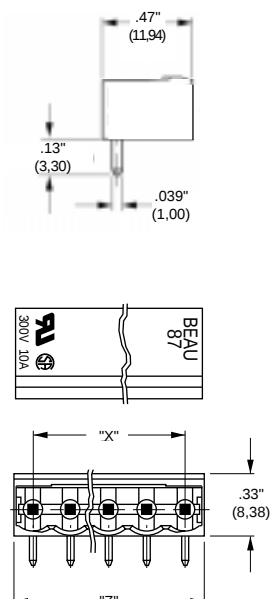

Part	X		Z	
Number	in	mm	in	mm
871902	.20	5,0	.45	11,3
871903	.39	10,0	.64	16,3
871904	.59	15,0	.84	21,3
871905	.79	20,0	1.04	26,3
871906	.99	25,0	1.23	31,3
871907	1.18	30,0	1.45	36,9
871908	1.38	35,0	1.65	41,9
871909	1.58	40,0	1.85	46,9
871910	1.77	45,0	2.05	51,9
871911	1.97	50,0	2.24	56,9
871912	2.17	55,0	2.44	62,0
871913	2.36	60,0	2.64	67,0
871914	2.56	65,0	2.83	72,0
871915	2.76	70,0	3.03	77,0
871916	2.95	75,0	3.23	82,0
871917	3.15	80,0	3.42	87,0
871918	3.35	85,0	3.62	92,0
871919	3.55	90,0	3.82	97,0
871920	3.74	95,0	4.01	102,0
871921	3.94	100,0	4.21	107,0
871922	4.14	105,0	4.41	112,0
871923	4.33	110,0	4.61	117,0
871924	4.53	115,0	4.80	122,0