

Data Communications Equipment and Cabling Labels

PORTABLE PRINTING AND LABELS


DATA COMMUNICATIONS EQUIPMENT & CABLING TLS2200 / TLS PC LINK LABELS

▶ VOICE AND DATA CABLING LABELS

All *B-427 parts listed in Voice and Data Cabling section are available in the following colors:

- BL = Blue (For horizontal cable terminations)
- BR = Brown (For campus backbone cable terminations)
- GR = Green (Network connections)
- GY = Gray (For backbone cable between intermediate cross-connect and a telecommunications closet)
- OR = Orange (Central office termination)
- PL = Purple (Major switching and data equipment terminations)
- RD = Red (For all key telephone equipment terminations)
- YL = Yellow (For auxiliary, maintenance, alarms, security, etc.)


* Standard product, contact your distributor or customer service representative for ordering information



Self-Laminating Vinyl (B-427), Low Smoke Self-Laminating Tedlar® (B-642)

Part Number	Labels Per Roll	Label Dimension			Application	Maximum Characters Per Line For Font:			Maximum Lines of Text For Font:		
		A Inches (mm)	B Inches (mm)	C Inches (mm)		2	7	10	2	7	10
PTL-19-427	250	1.000 (25.40)	1.000 (25.40)	0.375 (9.53)	2 pair Fiber, Single/Multi-Mode	24	10	7	3	1	1
BPTL-19-427	2500	1.000 (25.40)	1.000 (25.40)	0.375 (9.53)	2 pair Fiber, Single/Multi-Mode	24	10	7	3	1	1
PTL-19-642	250	1.000 (25.40)	1.000 (25.40)	0.375 (9.53)	2 pair Fiber, Plenum Grade	24	10	7	3	1	1
PTL-21-427	100	1.000 (25.40)	2.500 (63.50)	0.750 (19.05)	25 pair Copper, 4-12 pair Fiber	24	10	7	8	4	2
BPTL-21-427	1000	1.000 (25.40)	2.500 (63.50)	0.750 (19.05)	25 pair Copper, 4-12 pair Fiber	24	10	7	8	4	2
PTL-21-642	100	1.000 (25.40)	2.500 (63.50)	0.750 (19.05)	25 pair Copper, Plenum Grade	24	10	7	8	4	2
PTL-23-427	100	1.000 (25.40)	4.000 (101.60)	1.000 (25.40)	50 pair Copper, 24 pair Fiber	24	10	7	10	5	3
BPTL-23-427	1000	1.000 (25.40)	4.000 (101.60)	1.000 (25.40)	50 pair Copper, 24 pair Fiber	24	10	7	10	5	3
PTL-29-427	500	0.500 (12.70)	1.500 (38.10)	0.500 (12.70)	CAT-5, 4 pair UTP Copper	11	5	3	5	2	1
BPTL-29-427	5000	0.500 (12.70)	1.500 (38.10)	0.500 (12.70)	CAT-5, 4 pair UTP Copper	11	5	3	5	2	1
PTL-30-427	250	0.750 (19.05)	1.500 (38.10)	0.500 (12.70)	CAT-5, 4 pair UTP Copper	18	7	5	5	2	1
BPTL-30-427	2500	0.750 (19.05)	1.500 (38.10)	0.500 (12.70)	CAT-5, 4 pair UTP Copper	18	7	5	5	2	1
PTL-31-427	250	1.000 (25.40)	1.500 (38.10)	0.500 (12.70)	CAT-5, 4 pair UTP Copper	24	10	7	5	2	1
BPTL-31-427	2500	1.000 (25.40)	1.500 (38.10)	0.500 (12.70)	CAT-5, 4 pair UTP Copper	24	10	7	5	2	1
PTL-31-642	250	1.000 (25.40)	1.500 (38.10)	0.500 (12.70)	CAT-5, Plenum Grade	24	10	7	5	2	1
PTL-32-427	250	1.500 (38.10)	1.500 (38.10)	0.500 (12.70)	CAT-5, 4 pair UTP Copper	37	15	10	5	2	1
PTL-33-427	100	1.500 (38.10)	4.000 (101.60)	1.000 (25.40)	50 pair Copper, 24 pair Fiber	37	15	10	10	5	3
BPTL-33-427	1000	1.500 (38.10)	4.000 (101.60)	1.000 (25.40)	50 pair Copper, 24 pair Fiber	37	15	10	10	5	3
PTL-34-427	50	1.500 (38.10)	6.000 (152.40)	1.500 (38.10)	100 pair Copper, 36 pair Fiber	37	15	10	16	8	5
BPTL-34-427	500	1.500 (38.10)	6.000 (152.40)	1.500 (38.10)	100 pair Copper, 36 pair Fiber	37	15	10	16	8	5
PTL-64-427	100	1.000 (25.40)	3.375 (85.73)	1.125 (28.58)	CAT -5, 4 pair UTP Copper	24	10	7	12	12	8
PTL-87-427	250	1.750 (44.45)	1.000 (25.40)	0.375 (9.53)	2 pair Fiber, Single/Multi-Mode	21	11	7	3	1	1
PTL-88-427	250	1.750 (44.45)	1.500 (38.10)	0.500 (12.70)	CAT -5, 4 pair UTP Copper	40	16	11	5	2	1
PTL-102-427	250	0.500 (12.70)	1.250 (31.75)	0.375 (9.53)	CAT -5, 4 pair UTP Copper	11	5	3	3	1	1
PTL-103-427	250	1.000 (25.40)	1.250 (31.75)	0.500 (12.70)	CAT -5, 4 pair UTP Copper	24	10	7	5	2	1
PTL-104-427	250	1.500 (38.10)	1.000 (25.40)	0.375 (9.53)	2 pair Fiber, Single/Multi-Mode	37	15	10	3	1	1
PTL-106-427	1	50 ft (15.24 m)	1.500 (38.10)	0.500 (12.70)	CAT -5, 4 pair UTP Copper	—	N/A	—	5	2	1
PTL-107-427	1000	2.000 (50.80)	1.500 (38.10)	0.500 (12.70)	CAT -5, 4 pair UTP Copper	46	19	13	5	2	1
BPTL-107-427	1000	2.000 (50.80)	1.500 (38.10)	0.500 (12.70)	CAT -5, 4 pair UTP Copper	46	19	13	5	2	1

Tedlar® is a registered trademark of DuPont.

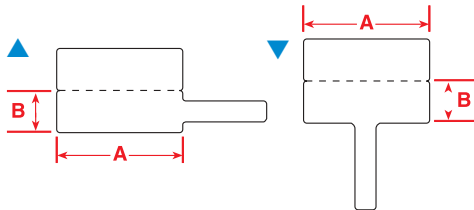

▶ FIBER OPTIC LABELS (B-8425), FLAG

Polypropylene (B-8425)

Diagram	Part Number	Labels Per Roll	Label Dimensions		Applications	Maximum Characters Per Line For Font:			Maximum Lines Of Text For Font:		
			A Inch (mm)	B Inch (mm)		2	7	10	2	7	10
▲	PTLFP-01-8425	250	1.180 (30.00)	0.390 (10.00)	Pig-tail and single fiber ID	26	12	8	3	2	1
▼	PTLFT-01-8425	250	1.180 (30.00)	0.390 (10.00)	Pig-tail and single fiber ID	26	12	8	3	2	1