


**Dura-Lag**  
**Dual-Element, Time-Delay Construction Grade Fuses**  
**Class RK5 – 600 Volt**

**DLS-R**  
**1 – 600 Amps**



**Dimensional Data**

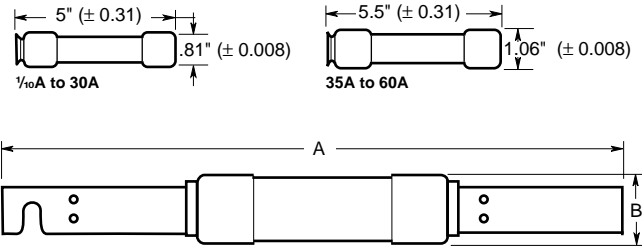

**Dimensions (inches)**

Ampere Ratings	A	B
70-100	7.88 (± 0.062)	1.16 (± 0.008)
110-200	9.63 (± 0.062)	1.66 (± 0.008)
225-400	11.63 (± 0.094)	2.38 (± 0.008)
450-600	13.38 (± 0.094)	2.88 (± 0.008)

**Catalog Symbol:** DLS-R (600V)

**Current-Limiting**

**Dual-Element, Time-Delay** – 10 seconds (minimum) at 500% rated current

**Voltage Rating:** 600 Volts AC (or less)

Self-Certified for 300 Vdc

**Interrupting Rating:** 200,000A RMS Symmetrical  
 20,000A DC

**Agency Approvals:**

U.L. Listed, Std. 248-12, Guide JDDZ, File E4273

CSA Certified, C22.2 No. 248.12, Class 1422-02, File 53787

**General Information:**

- Designed for contractor needs.
- Protects industrial equipment and large motors.
- Recommended for AC power distribution system mains, feeders and branch circuits.
- Industry standard time-delay of 10 seconds at 5 times the fuse rating.

**Carton Quantity and Weight**

Ampere Ratings	Carton Qty.	Weight*	
		Lbs.	Kg.
1/10-30	10	1.62	0.729
35-60	10	3.00	1.35
70-100	5	2.20	1.0
110-200	1	1.10	0.5
225-400	1	2.36	1.1
450-600	1	3.44	1.5

\*Weight per carton.

**Catalog Numbers**

DLS-R-1	DLS-R-10	DLS-R-100
DLS-R-1 1/10	DLS-R-12	DLS-R-110
DLS-R-2	DLS-R-15	DLS-R-125
DLS-R-2 1/2	DLS-R-17 1/2	DLS-R-150
DLS-R-2 3/10	DLS-R-20	DLS-R-175
DLS-R-3	DLS-R-25	DLS-R-200
DLS-R-3 3/10	DLS-R-30	DLS-R-225
DLS-R-3 1/2	DLS-R-35	DLS-R-250
DLS-R-4	DLS-R-40	DLS-R-300
DLS-R-5	DLS-R-45	DLS-R-350
DLS-R-6	DLS-R-50	DLS-R-400
DLS-R-6 1/4	DLS-R-60	DLS-R-500
DLS-R-7	DLS-R-70	DLS-R-600
DLS-R-8	DLS-R-80	—
DLS-R-9	DLS-R-90	—

CE CE logo denotes compliance with European Union Low Voltage Directive (50-1000 Vac, 75-1500 Vdc). Refer to BIF document #8002 or contact Bussmann Application Engineering at 636-527-1270 for more information.

# Dura-Lag


## Dual-Element, Time-Delay Construction Grade Fuses

### Class RK5 - 600 Volt


# DLS-R

## 1 - 600 Amps

#### Time-Current Characteristic Curves—Average Melt

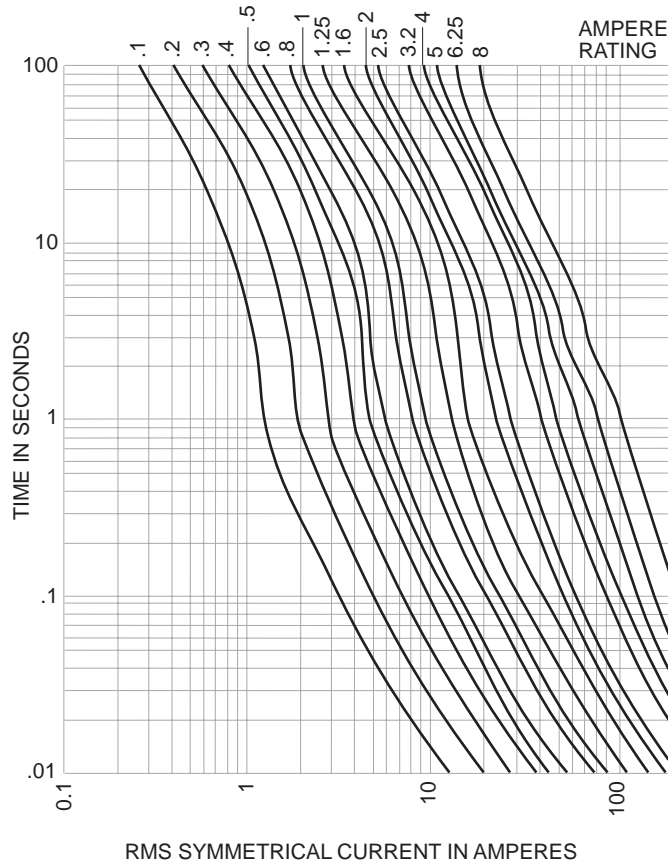

#### RMS SYMMETRICAL CURRENT IN AMPERES

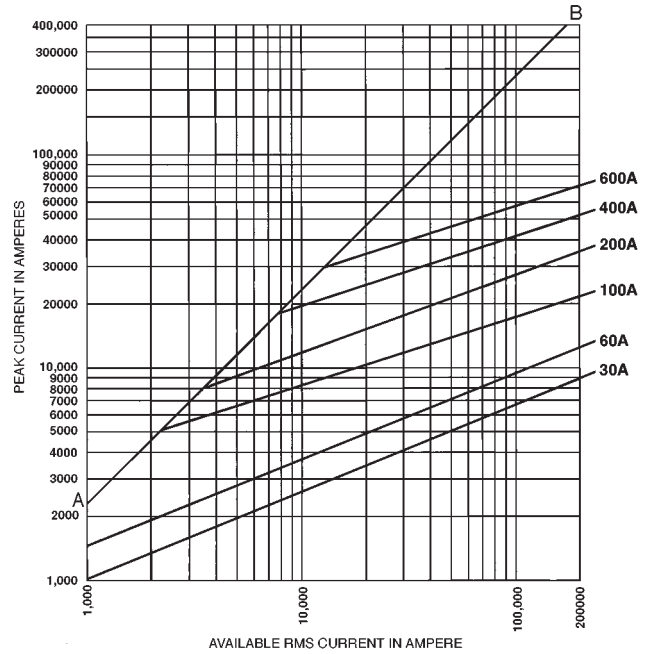


#### PROSPECTIVE SHORT-CIRCUIT CURRENT SYMMETRICAL RMS AMPERES

# Dura-Lag DLS-R

## Dual-Element, Time-Delay Construction Grade Fuses 1 Amp-600 Amps

### Class RK5 - 600 Volt

**Time-Current Characteristic Curves-Average Melt**

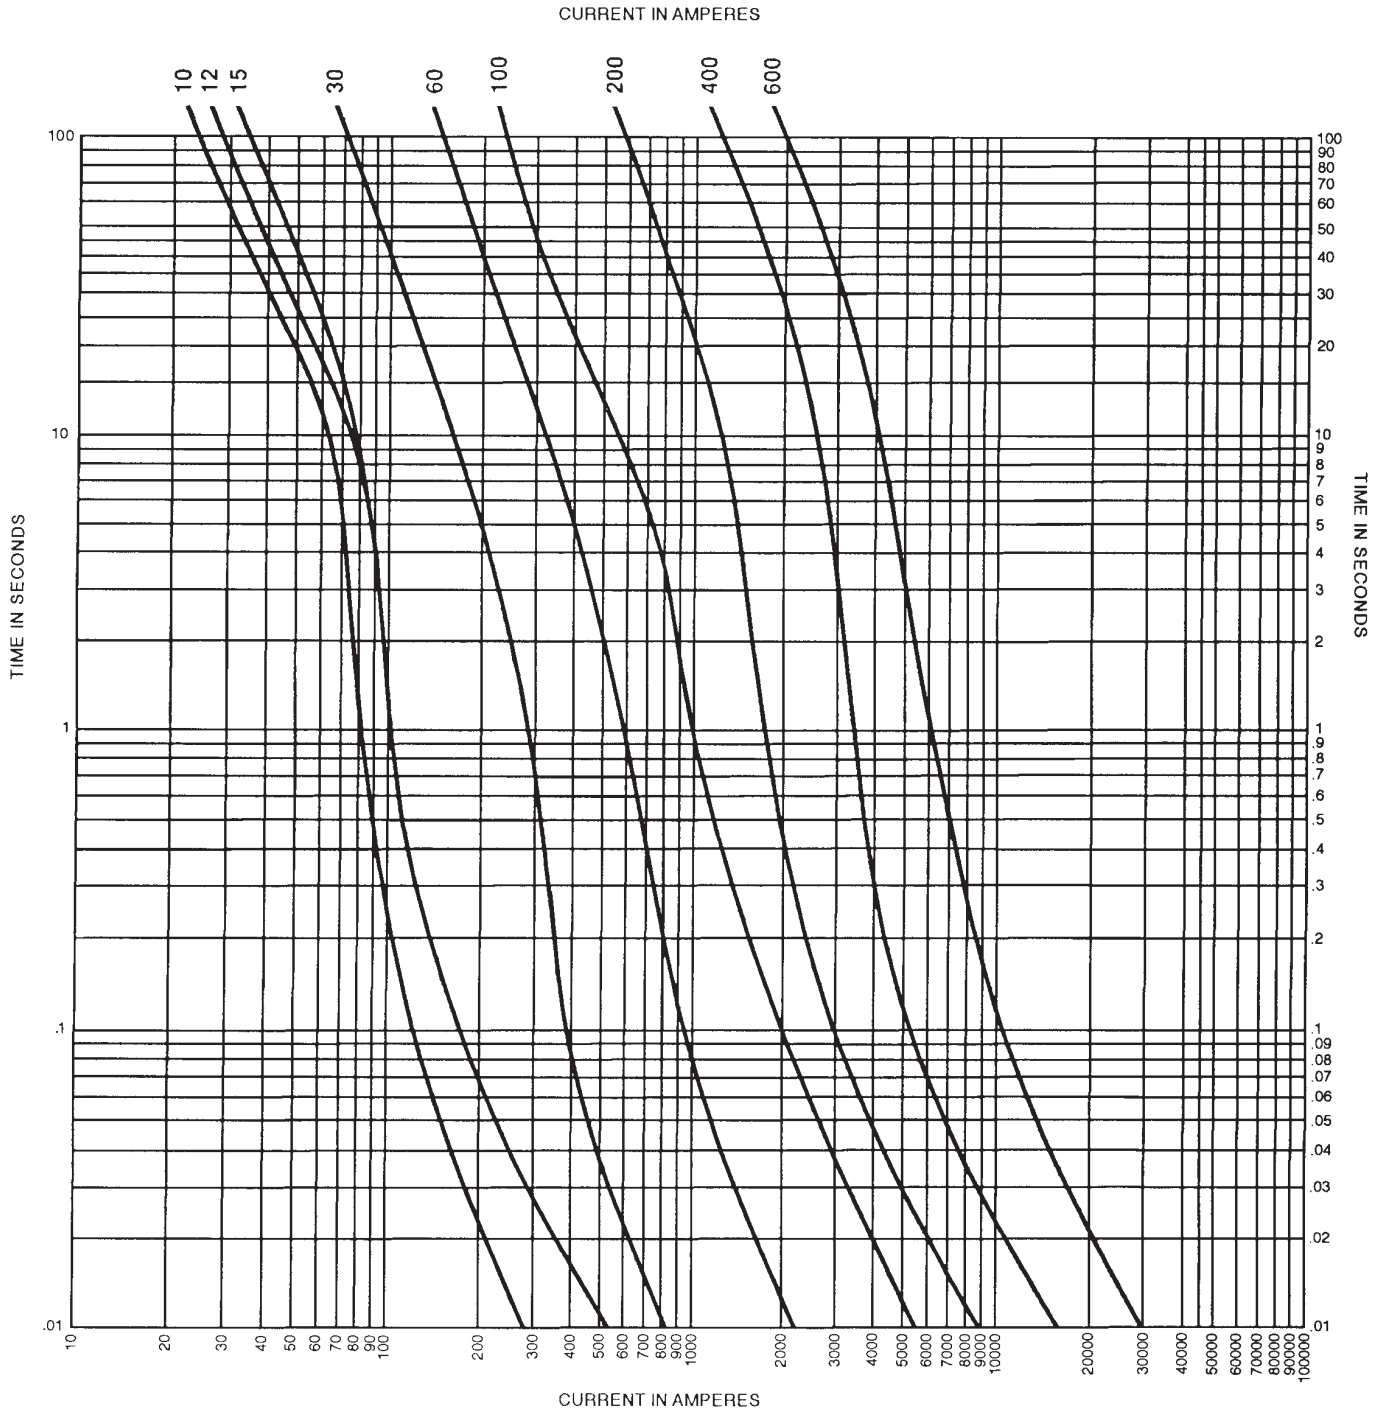

The only controlled copy of this BIF document is the electronic read-only version located on the Bussmann Network Drive. All other copies of this document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.