

Ferrule Style

FWL/FWS 1250V/1500V 2-30A


| Electrical Characteristics | | | | Ordering Information | | | Dimensions | |
|--|---------------------------|-------------------------------------|----------------------|----------------------|-------------|-------------|--------------------|---------------|
| Size | Rated Current RMS-Amps | I ² t (A ² S) | | Watts Loss | Part Number | Carton Qty. | Carton Weight (kg) | Figure Number |
| | | Pre-arc | Clearing at 1000 VDC | | | | | |
| 20 x 127mm (⁷ / ₁₆ " | †2 | 0.8 | 2.4 | 4.4 | FWS-2A20F | 10 | 1.00 | Fig. 1 |
| | †6 | 27 | 81 | 6.7 | FWS-6A20F | | | |
| | †10 | 170 | 400 | 3.0 | FWS-10A20F | | | |
| | †15 | 300 | 700 | 5 | FWS-15A20F | | | |
| | ‡20 | 675 | 1550 | 5.9 | FWL-20A20F | | | |
| | ‡30 | 1850 | 4300 | 7.5 | FWL-30A20F | | | |

- Interrupting rating 45kA RMS Symmetrical.
- Rated voltage (IEC) †1500V ‡1250V
- 1000 Vdc rating.

1 kg = 2.2 lbs. 1 lb = 0.45 kg

Dimensions

Fig. 1: 2-30 Amp Range

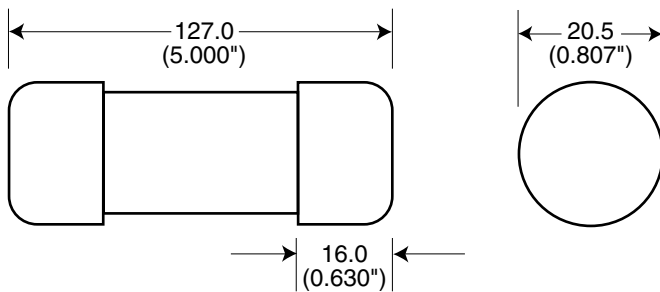

Dimension in mm.
1mm = 0.0394" 1" = 25.4mm

