

Specialty Fuse

Time-Delay, Non-Rejecting

GMF, GRF & HLR



Catalog Symbols: GMF and GRF
Time-Delay
Non-Rejection Style Fuse

	GMF	GRF
Amperes	1/8-6 1/4	7-10
Volts AC	300	125

Interrupting Rating: 10,000 Amperes

Agency Approvals:

GMF and GRF Fuse:

U.L. Listed, Std. 248-14, Guide JDYX, File E14853
CSA Certified, C22.2 No. 248.14, Class 1422-01, File 53787

HLR Fuseholder:

U.L. Recognized, 12A, 300 Vac, Guide IZLT2, File E14853
CSA Certified, 12A, 300 Vac, Class 6225-01, File 47235
HLR-2A:

U.L. Recognized, 15A, 300 Vac, Guide IZLT2, File E14853
CSA Certified, 15A, 300 Vac, Class 6225-01, File 47235


Electrical Ratings for Type GMF and GRF Fuses and Non-Rejection Style Carriers

Fuse	Carrier	Fuse	Carrier
GMF-3/10	HLR	GMF-2 8/10	HLR
GMF-1/2	HLR	GMF-3	HLR
GMF-9/10	HLR	GMF-3 3/10	HLR
GMF-9/10	HLR	GMF-4	HLR
GMF-1	HLR	GMF-5*	HLR
GMF-1 1/4	HLR	GMF-6 1/4*	HLR
GMF-1 6/10	HLR	GRF-7**	HLR
GMF-2	HLR	GRF-8**	HLR
GMF-2 1/2	HLR	GRF-10**	HLR


*300 Volts AC.
**125 Volts AC.

Dimensional Data


FUSE




FUSE AND CARRIER

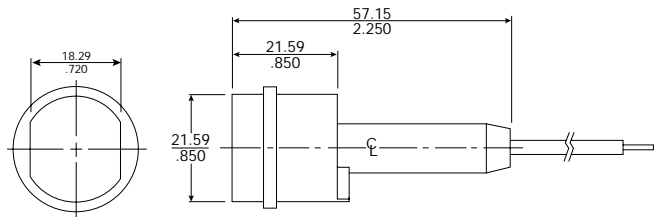

MOUNTING HOLE



Knockout Hole



Keyhole Punch

General Information:

- HLR carrier comes with 6" of #18 red insulated solid copper wire attached to the line side.
- Customer inserts a #18 insulated solid copper wire into load side receptacle.
- Order part number HLR-2A to obtain 6" of #18 black insulated solid copper wire pre-installed in a load side receptacle.
- Order part number HLR-2L to obtain 6" of #18 black insulated solid copper wire packaged loose (un-installed).
- Fuse and knob are an integral one-piece unit. There are no replacement knobs (caps).
- Units can be panel-mounted with a separate steel clip (BK/A-104).


CE CE logo denotes compliance with European Union Low Voltage Directive (50-1000 Vac, 75-1500 Vdc). Refer to BIF document #8002 or contact Bussmann Application Engineering at 314-527-1270 for more information.

Specialty Fuse


Time-Delay, Non-Rejecting

GMF, GRF & HLR

Time-Current Characteristic Curves-Average Melt

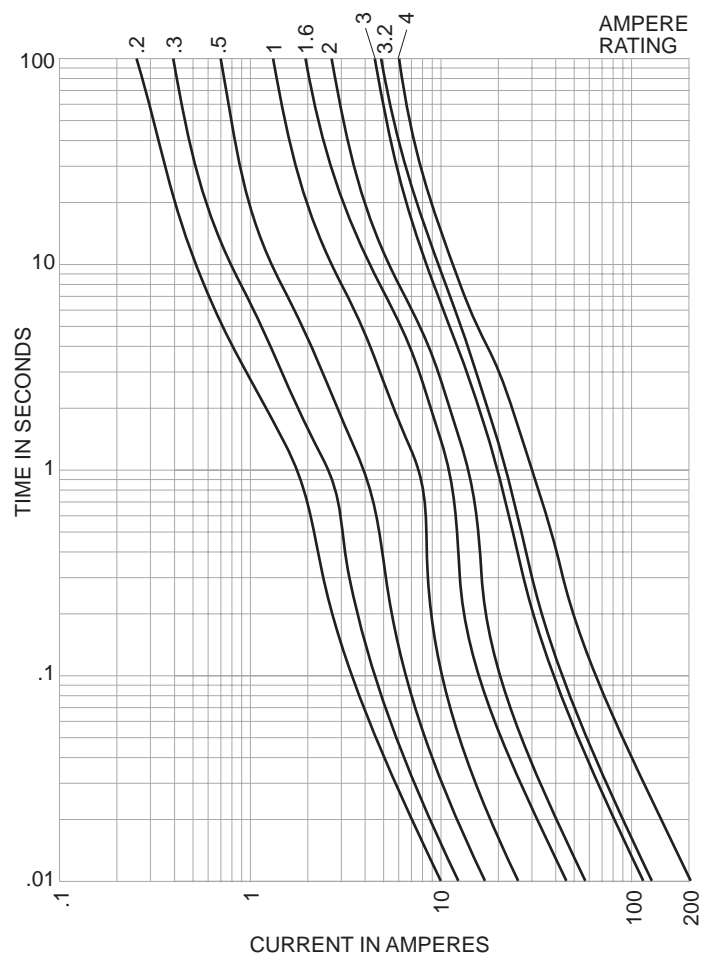

Time-Current Characteristic Curves-Average Melt

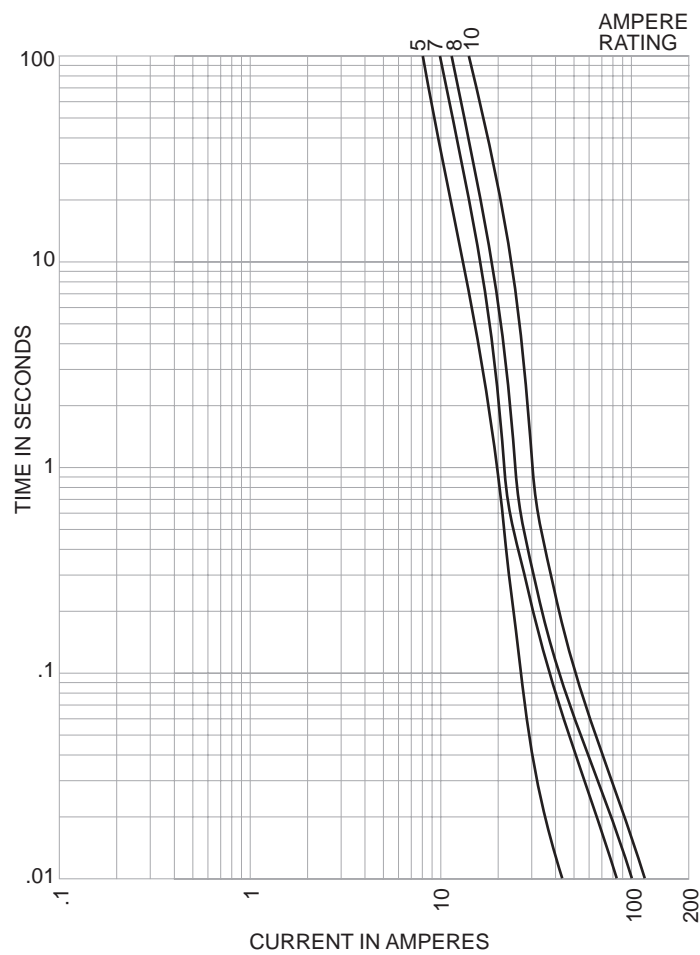

The only controlled copy of this BIF document is the electronic read-only version located on the Bussmann Network Drive. All other copies of this document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.