

# Panel-Mount Fuseholder

## For 1/4" x 1 1/4" Fuses

# HKP Series



**Catalog Symbol:** HKP, HKP-BBHH, HKP-CC, HKP-HH, HKP-L, HKP-LW-HH, HKP-OO, AND HKP-W

**Panel-Mount**

**Agency Approvals:** U.L. Recognized, Guide IZLT2, File E14853  
CSA Certified, Class 6225-01, File 47235

**Temperature Rating (RTI):** 150°C

### Electrical Ratings

Catalog Symbol	Amps	Volts AC	Fuse Description
HKP	30	250	—
HKP-BBHH	15	250	HKP with 1/4" quick connects, nut and washer assembled.
HKP-CC	30	250	HKP with 3/32" shorter body.
HKP-HH	15	250	HKP with 1/4" quick-connect.
HKP-L	30	250	HKP with 2250V stand-off barrier.
HKP-LW-HH	15	250	HKP with drip-proof knob, 2250V stand-off barrier and quick-connects.
HKP-OO	30	250	HKP with snap-lock.
HKP-W	30	250	HKP with drip-proof knob.

### Carton Quantity and Weight

Ampere Ratings	Carton Qty.	Weight Lbs.	Weight Kg.
15 and 30	100	3.25	1.47


### General Information:

- Bayonet-type knob.
- Vibration resistant.
- For panels up to 5/16" (7.9mm) thick.
- Military version is designated FHN26G1.
- Plastic nut replacements -BK/1A4287.  
Metal nut replacements -BK/1A4806-2.  
Cap replacement -9435-1/2.  
Neoprene washer replacements -9732.


CE CE logo denotes compliance with European Union Low Voltage Directive (50-1000 Vac, 75-1500 Vdc). Refer to BIF document #8002 or contact Bussmann Application Engineering at 314-527-1270 for more information.

### Dimensional Data


HKP, HKP-L, AND HKP-W

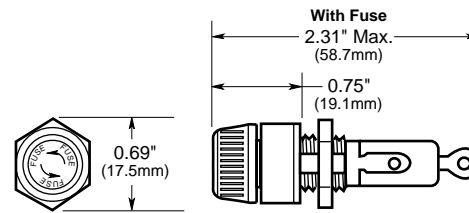


### Punched Mounting Hole




HKP-BBHH, HKP-HH, AND HKP-LW-HH

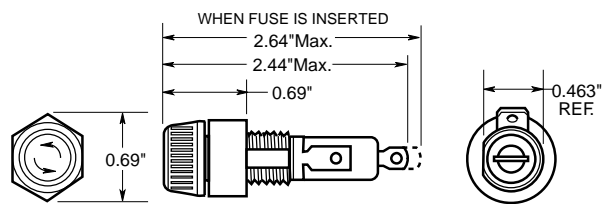


### Punched Mounting Hole




### Drilled Mounting Hole



HKP-OO

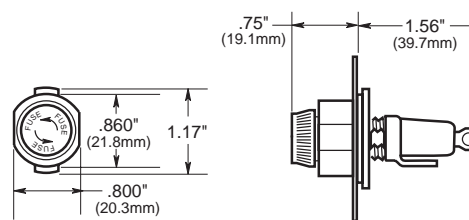

### Punched Mounting Hole



The only controlled copy of this BIF document is the electronic read-only version located on the Bussmann Network Drive. All other copies of this document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.