



# Panel-Mount Fuseholder

## For 1<sup>3</sup>/<sub>32</sub>" × 1<sup>5</sup>/<sub>16</sub>" to 1<sup>1</sup>/<sub>2</sub>" Fuses

# HPF Series



### Dimensional Data All dimensions (±0.015)

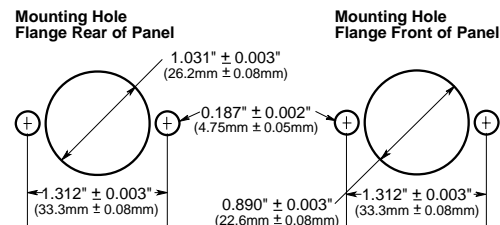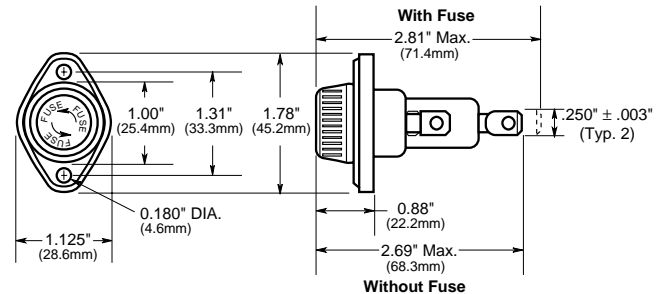

**Catalog Symbol:** HPF, HPF-C, HPF-L, HPF-EE, HPF-JJ, HPF-FF, HPF-RR, HPF-WT, and HPF-F-EE

**Panel-Mount**

**Agency Approvals:**

U.L. Recognized, Guide IZLT2, File E14853  
 CSA Certified, Class 6225-01, File 47235

**Flammability Rating:** U.L. 94 VO

**Temperature Rating (RTI):** 150°C

**Electrical Ratings**

Catalog Symbol	Amps	Volts AC	Fuse Description
HPF	30	600	1 <sup>1</sup> / <sub>2</sub> " (38.1mm).
HPF-C	15	250	1 <sup>1</sup> / <sub>2</sub> " (38.1mm) clear knob.
HPF-L	5	600	BBS, 1 <sup>3</sup> / <sub>32</sub> " × 1 <sup>3</sup> / <sub>8</sub> " fuses.
HPF-EE	15	600	S.C. 0-15, 1 <sup>3</sup> / <sub>32</sub> " × 1 <sup>5</sup> / <sub>16</sub> " fuses.
HPF-JJ	20	600	S.C. 20, 1 <sup>3</sup> / <sub>32</sub> " × 1 <sup>13</sup> / <sub>32</sub> " fuses.
HPF-FF*	30	300	S.C. 25 & 30, 1 <sup>3</sup> / <sub>32</sub> " × 1 <sup>5</sup> / <sub>8</sub> " fuses.
HPF-RR	30	600	KTK-R, LP-CC & FNQ-R Class CC fuses.
HPF-WT	30	600	Splash-proof knob.
HPF-F-EE*	15	600	Sleeve on body, leaded for 1 <sup>3</sup> / <sub>32</sub> " × 1 <sup>5</sup> / <sub>16</sub> " fuses.

\*No CSA Certification

**General Information:**

- Screw-type knob.
- One-piece side terminal and threaded insert eliminates two-piece solder fabrication.
- Combination 1/4" quick-connect/solder terminals for versatility.
- The HPF series functionally replaces the Buss® HPC series.
- Replacement caps-BK/9789-1/2 (for HPF, HPF-L, HPF-EE, HPF-JJ, HPF-FF and HPF-RR).

CE CE logo denotes compliance with European Union Low Voltage Directive (50-1000 Vac, 75-1500 Vdc). Refer to BIF document #8002 or contact Bussmann Application Engineering at 636-527-1270 for more information.

**Carton Quantity and Weight**

Carton Qty.	Weight	
	Lbs.	Kg.
100	6.75	3.06

The only controlled copy of this BIF document is the electronic read-only version located on the Bussmann Network Drive. All other copies of this document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.