


# HRCI-CA Industrial Ceramic Body Fuse Bolt-On Mounting

CIF21B



### Dimensional Data

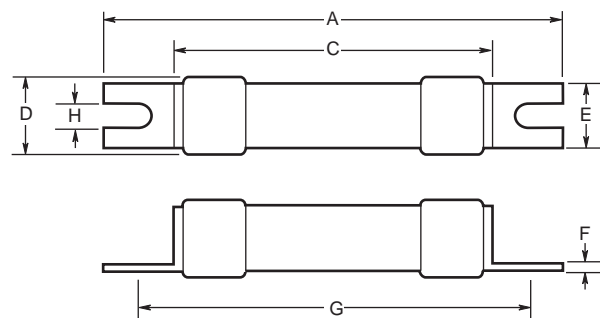

CATALOG SYMBOL: CIF21B

1 - 30 Amps

600 Volts AC; 250 Volts DC

INTERRUPTING RATING: 200,000A RMS SYMMETRICAL

CSA C22.2 NO. 106-M92


- Provides both overload and short-circuit protection to HRCI requirements.
- Offset blades for bolt-on mounting.
- CIF21B fuse fits the Bussmann-Camaster Fuseholder.

Type	Catalog Symbol	Amps	Dimensions in Inches and (mm)								
			Overall		Tags			Mounting		Body	
			A	E	F	G	H	C	D		
HRCI-CA	CIF21B	1-30A	2.15 (54.50)	.44 (11.10)	.03 (0.81)	1.75 (44.50)	.19 (4.70)	1.44 (35.50)	.54 (13.80)		


# HRCI-CA Industrial Ceramic Body Fuse Bolt-On Mounting

# CIF21B


**Peak Let-Through Curves (Cat. No. CIF21B)**

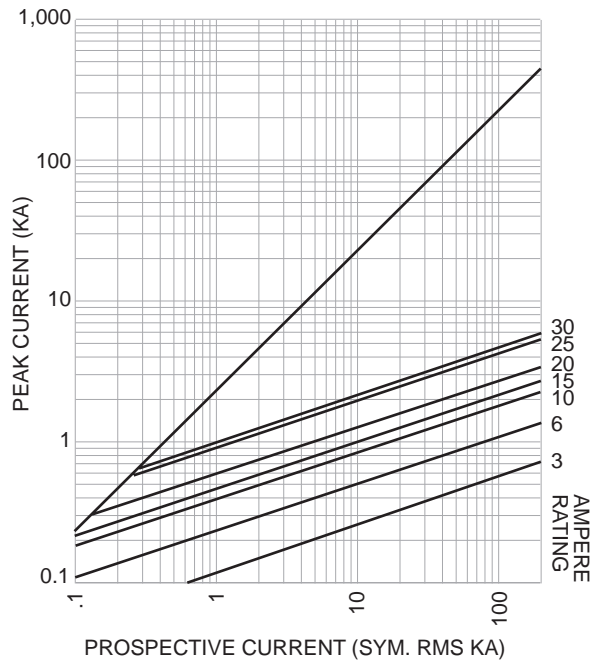

**Time/Current-Curves (Cat. No. CIF21B)**

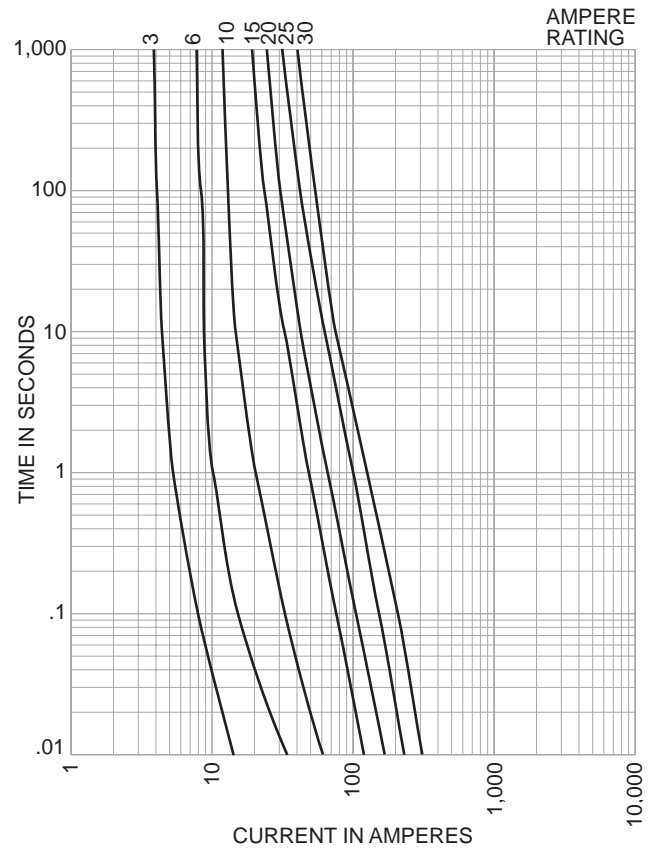

**Energy Let-Through Curves (Cat. No. CIF21B)**

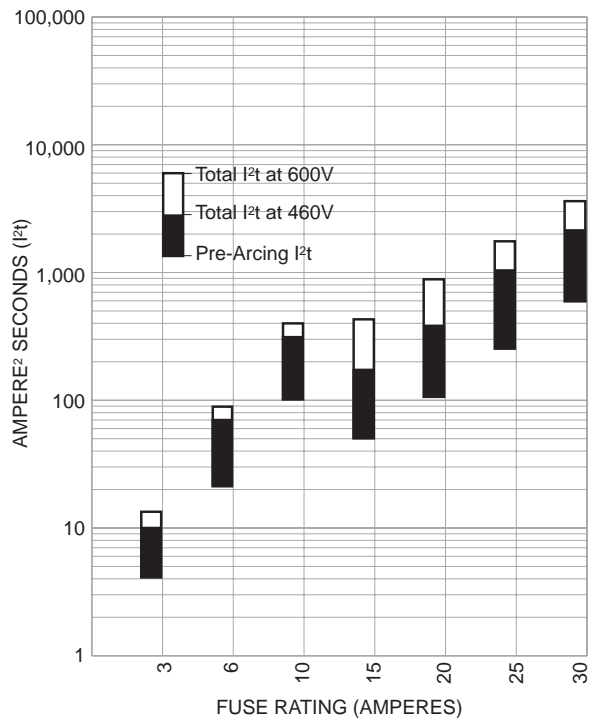

Ref	Power Dissipation @ Rated Amps	
	Watts	
3CIF21B	1.8	
6CIF21B	1.5	
10CIF21B	3.4	
15CIF21B	2.4	
20CIF21B	3.2	
25CIF21B	3.6	
30CIF21B	3.6	

The only controlled copy of this BIF document is the electronic read-only version located on the Bussmann Network Drive. All other copies of this BIF document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.


# HRCI-CB Industrial Ceramic Body Fuse

## Clip-In Mounting

CIF06B  
EK-B



### Dimensional Data

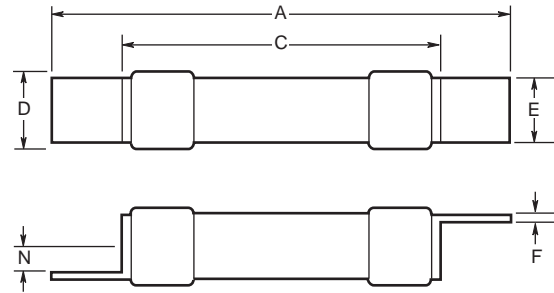

CATALOG SYMBOL: CIF06B (1 - 30 Amps)  
EK-B (35 - 60 Amps)

600 Volts AC; 250 Volts DC

INTERRUPTING RATING: 200,000A RMS SYMMETRICAL

CSA C22.2 NO. 106-M92

- Industrial miniature fuse with offset blades for clip-in mounting.
- Ground ceramic body with plated endcaps.
- Provides both short circuit and overload protection.
- CIF06B fits the 30 Amp SafeLOC fuseholder.  
EK-B fits the 60 Amp SafeLOC fuseholder.


Type	Catalog Symbol	Amps	Dimensions in Inches and (mm)					
			A	E	F	N	C	D
HRCI-CB	CIF06B	1-30A	2.38 (60.40)	.50 (12.70)	.03 (0.81)	.14 (3.50)	1.44 (35.50)	.54 (13.80)
	EK-B	35-60A	2.65 (67.30)	.58 (14.80)	.05 (1.22)	.14 (3.50)	1.44 (36.30)	.84 (21.40)

# HRCI-CB Industrial Ceramic Body Fuse


## Clip-In Mounting

CIF06B  
EK-B


Peak Let-Through Curves (Cat. No. CIF06B)

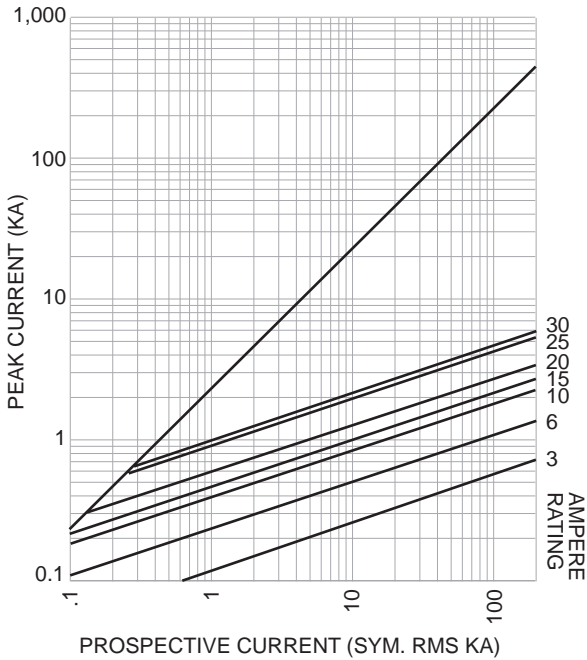

Time/Current-Curves (Cat. No. CIF06B)

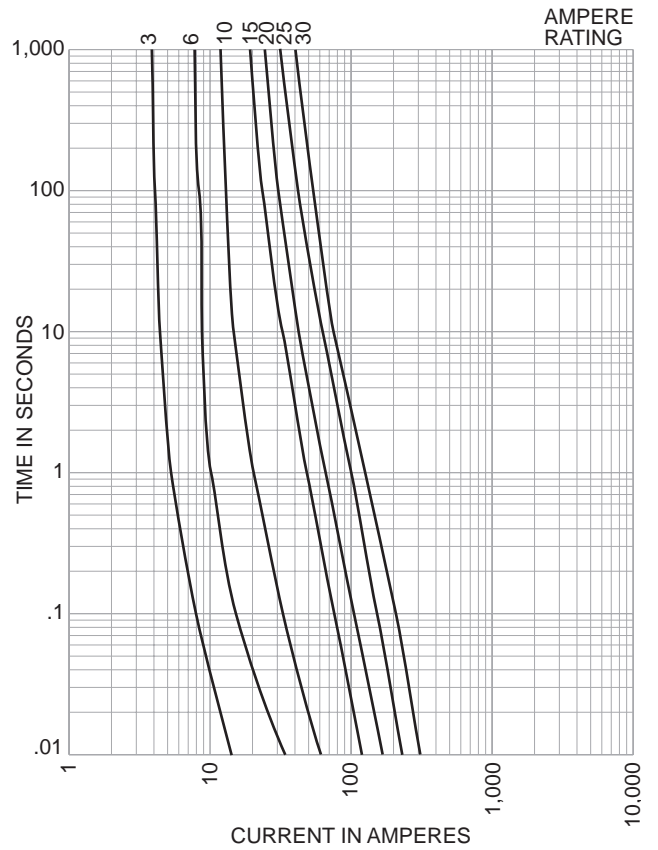

Energy Let-Through Curves (Cat. No. CIF06B)

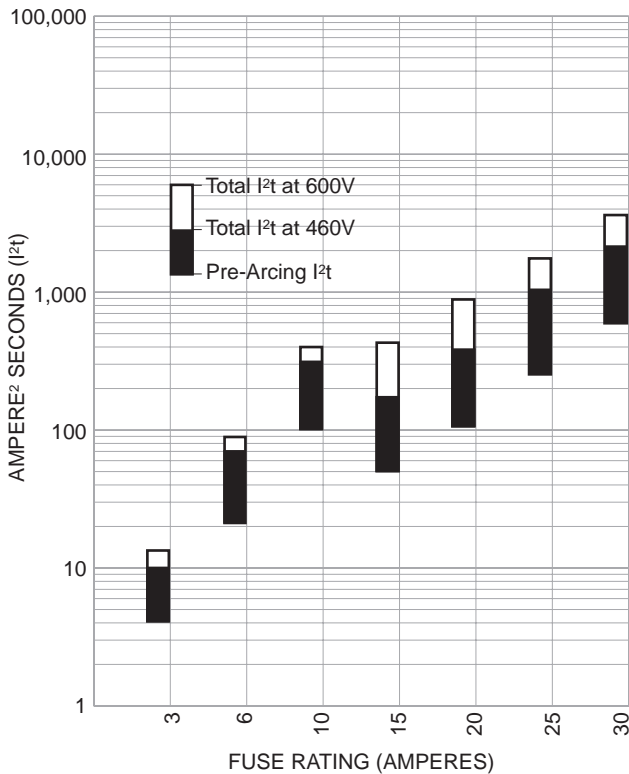


Catalog No.	Power Dissipation @ Rated Amps
	Watts
3CIF06B	1.8
6CIF06B	1.5
10CIF06B	3.4
15CIF06B	2.4
20CIF06B	3.2
25CIF06B	3.6
30CIF06B	3.6


# HRCI-CB Industrial Ceramic Body Fuse Clip-In Mounting

CIF06B  
EK-B


Peak Let-Through Curves (Cat. No. EK-B)

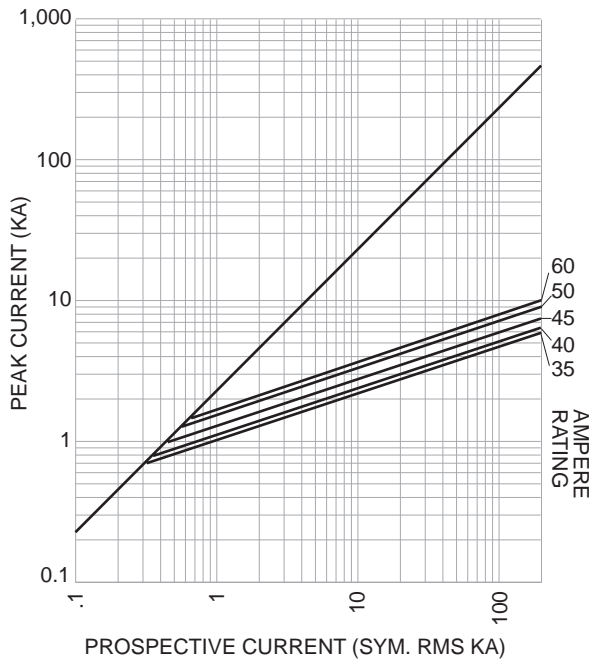

Time/Current-Curves (Cat. No. EK-B)

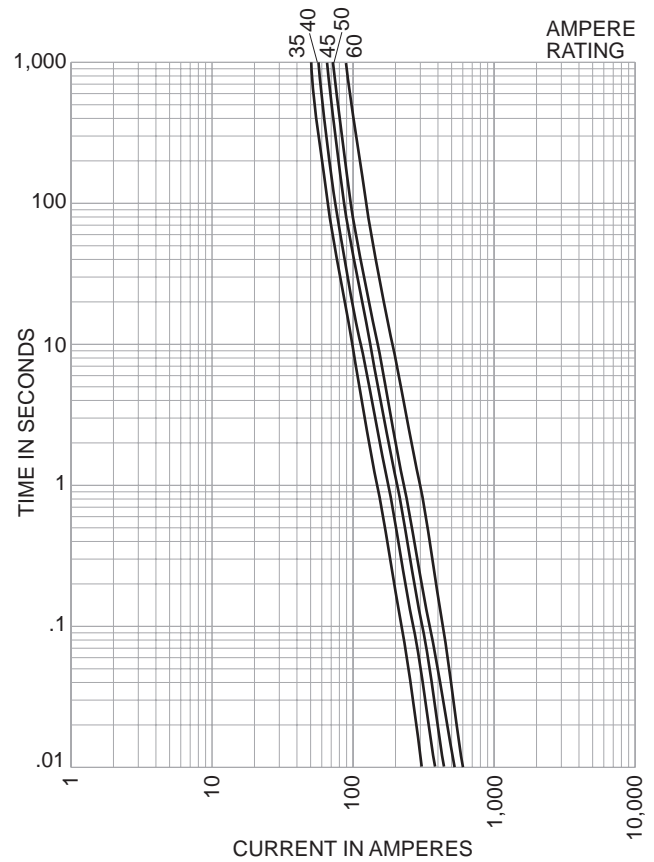

Energy Let-Through Curves (Cat. No. EK-B)

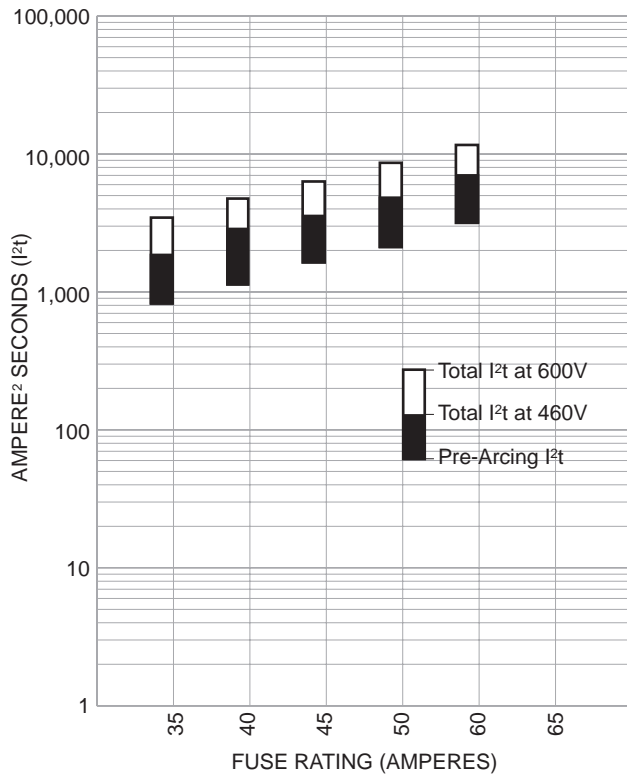

Catalog No.	Power Dissipation @ Rated Amps
	Watts
EK35B	4.2
EK40B	4.8
EK45B	5.8
EK50B	6.6
EK60B	7.0

The only controlled copy of this BIF document is the electronic read-only version located on the Bussmann Network Drive. All other copies of this BIF document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.