

# Panel Mount Fuseholders

# HTC


For 5mm x 20mm Fuses



**HTC-35M**  
**Panel Mount Fuseholder**


250V, 6.3A, 2.5W  
Threaded Cap/Carrier  
See Specifications Below

All tolerances ( $\pm 0.005"$ ,  $\pm 0.13\text{mm}$ )

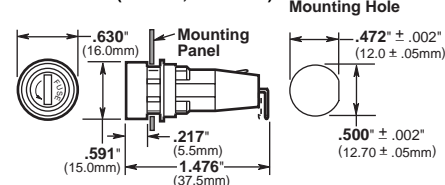


**HTC-40M**  
**Panel Mount Fuseholder**

250V, 6.3A, 2.5W  
Screwdriver slot

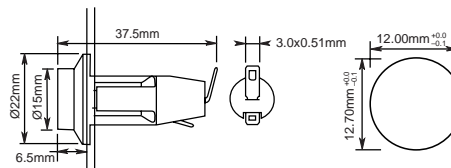


**HTC-55M**  
**Panel Mount Fuseholder**

250V, 6.3A, 2.5W  
Bayonet Cap/Carrier  
See Specifications Below

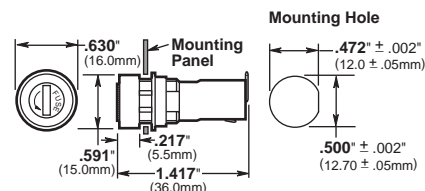

**HTC-70M**  
**Panel Mount Fuseholder**

250V, 10A, 2.5W  
Bayonet Cap/Carrier  
See Specifications Below

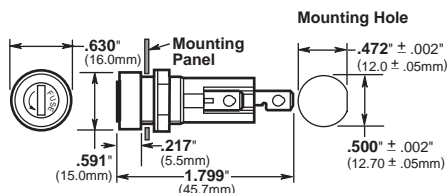

**SPECIFICATION DATA**

**Terminals** — Brass, tin plated, with 3mm HTC-35M, -55M, (4.8mm HTC-70M).

**Molded Materials** — High temperature thermoplastic that meets the flammability ratings of UL 94-V0; Glow Wire Test: 960°C per IEC 695-2-1.

**Solderability** — In accordance with IEC 68-2-20.

**Agency Approvals**— UL Recognized Guide 1ZLT2, File E14852; CSA Certified Class 6225-01, File 47235; SEMKO 9005230

**Electrical** — Contact Resistance:  $\leq 10\text{m}\Omega$ ; Insulation Resistance:  $\geq 10\text{M}\Omega$ ; Dielectric Strength  $\geq 2000\text{ VAC}$ .

**Shock Safety** — PC2 (fuseholders).

**Packaging** — Standard Qty 10 (No Prefix), Bulk Qty 100 (Prefix Catalog Number with BK). Ammo Pack (HTC-200M) 1000 pieces per box (Prefix Catalog Number TR).

The only controlled copy of this BIF document is the electronic read-only version located on the Bussmann Network Drive. All other copies of this BIF document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.