


HI-CAP® Current-Limiting, Time-Delay Fuses 600 Volt, 150 to 600 Amps

KRP-CL



Dimensional Data All other tolerances (± 0.02)

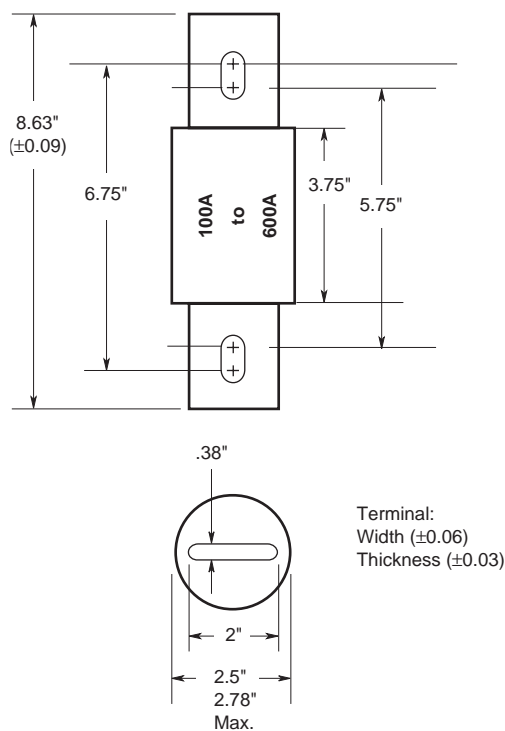

Terminal:
Width (± 0.06)
Thickness (± 0.03)

Catalog Symbol: KRP-CL
Current-Limiting
Ampere Rating: 150 to 600 Amperes
Voltage Rating: 600 Volts AC (or less)
Interrupting Rating: 200,000A RMS Sym.

Ampere Ratings

Cat. No. (Symbol & Amps)		
KRP-CL-150	KRP-CL-300	KRP-CL-500
KRP-CL-200	KRP-CL-350	KRP-CL-600
KRP-CL-225	KRP-CL-400	—
KRP-CL-250	KRP-CL-450	—

Weight of each is 3.75 lbs.

KRP-CL HI-CAP Fuses

These fuses have the same performance characteristics as KRP-C fuses. (Current U.L. Standards do not cover Class L fuse ratings below 601 amperes.) They are used in applications where there is a need for Class L dimension fuses with 100 to 600 ampere ratings. All KRP-CL fuses have the same dimensions as 800 ampere Class L fuses.

The only controlled copy of this BIF document is the electronic read-only version located on the Bussmann Network Drive. All other copies of this document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.