


LIMITRON®


Fast-Acting Fuses

13/32" x 1-1/2", Class CC - 600 Volt, 1/10 - 30 Amps

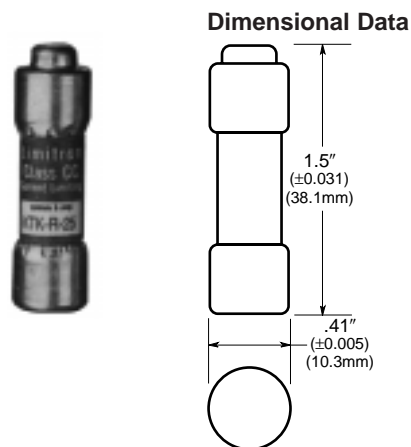

- LIMITRON® fast-acting fuse.
- Melamine tube. Nickel-plated brass endcaps.
- U.L. Listed for branch circuit protection.
- Rejection type; for both standard holders or those which reject other type fuses.

Time-Current Characteristic Curves—Average Melt

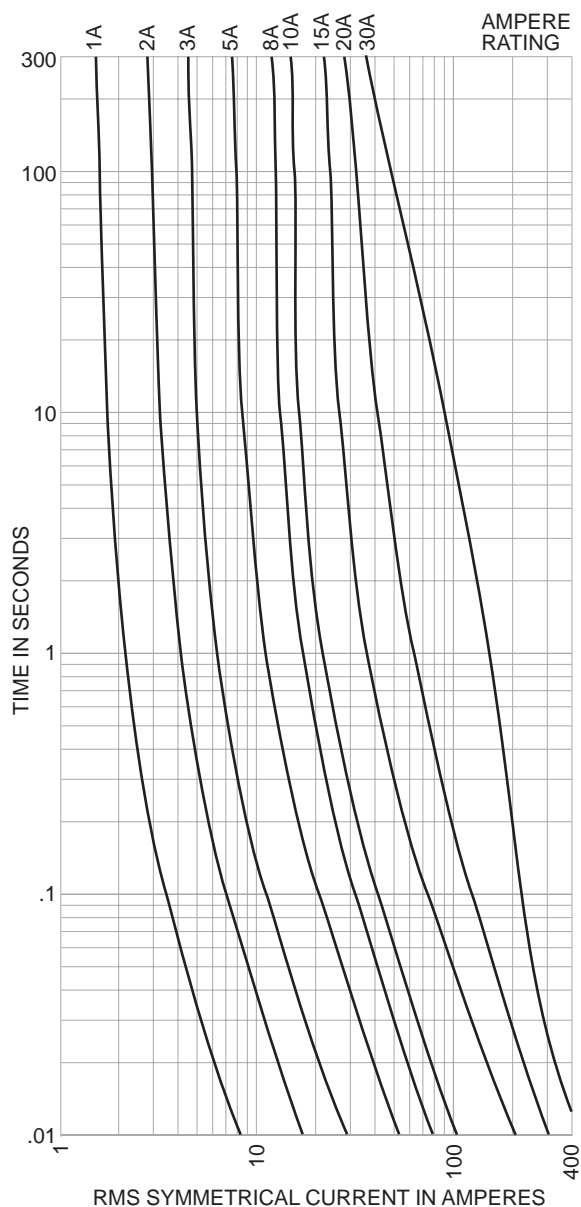

CATALOG SYMBOL: KTK-R
 FAST-ACTING BRANCH CIRCUIT FUSE
 1/10 TO 30 AMPERES
 600 VOLTS AC (OR LESS)†
 INTERRUPTING RATING—200,000A RMS SYM. (U.L.)
 UL LISTED, STD. 248-4, CLASS CC,
 (GUIDE #JDDZ, FILE #E4273)
 CSA CERTIFIED, C22.2 NO. 248.4, (FILE #53787—CLASS
 #1422-02)
 †12-30A RATED 300 VDC AND 10 KAIC.

Electrical Ratings (Catalog Symbol and Amperes)

600 Volts AC - U.L. Listed & C.S.A.

KTK-R-1/10	KTK-R-6/10	KTK-R-3-1/2	KTK-R-10
KTK-R-1/8	KTK-R-3/4	KTK-R-4	KTK-R-12
KTK-R-2/10	KTK-R-1	KTK-R-5	KTK-R-15
KTK-R-1/4	KTK-R-1-1/2	KTK-R-6	KTK-R-20
KTK-R-3/10	KTK-R-2	KTK-R-7	KTK-R-25
KTK-R-4/10	KTK-R-2-1/2	KTK-R-8	KTK-R-30
KTK-R-1/2	KTK-R-3	KTK-R-9	-

Carton Quantity and Weight

Ampere Ratings	Carton Qty.	Weight*	
		Lbs.	Kg.
1/10-30	10	.180	.082

*Weight per carton.

Fuseblock Catalog Numbers

No. of Poles	Screw Terminal	Pressure Plate	Box Terminal	Screw Quick-Connect	Pressure Quick-Connect
1	BC6031S	BC6031P	BC6031B	BC6031SQ	BC6031PQ
2	BC6032S	BC6032P	BC6032B	BC6032SQ	BC6032PQ
3	BC6033S	BC6033P	BC6033B	BC6033SQ	BC6033PQ

CE logo denotes compliance with European Union Low Voltage Directive (50-1000 VAC, 75-1500 VDC). Refer to BIF document #8002 or contact Bussmann Application Engineering at 636-527-1270 for more information.

The only controlled copy of this BIF document is the electronic read-only version located on the Bussmann Network Drive. All other copies of this BIF document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.