

LOW-PEAK®

Dual-Element, Time-Delay Fuses

Class RK1 – 600 Volt

LPS-RK

0-60 Amps



Catalog Symbol: LPS-RK_SP
 Dual-Element, Time-Delay – 10 seconds (minimum) at 500% rated current

Current-Limiting

Ampere Rating: 1/10 to 60 Amperes

Voltage Rating: 600 Volts AC (or less)

Interrupting Rating:

AC: 300,000A RMS Sym.

DC: 50,000 Amperes

Agency Approvals:

UL Listed, Special Purpose**, Guide JFHR, File E56412
 CSA Certified, (200,000AIR), Class RK1 per CSA C22.2,
 No. 248.12, Class 1422-02, File 53787

**Meets all performance requirements of UL Standard 248-12 for Class RK1 fuses.

Catalog Symbol and Amperes

LPS-RK-1/10SP	LPS-RK-1 1/2SP	LPS-RK-5SP	LPS-RK-20SP
LPS-RK-2/10SP	LPS-RK-1 9/10SP	LPS-RK-5 9/10SP	LPS-RK-25SP
LPS-RK-3/10SP	LPS-RK-1 7/10SP	LPS-RK-6SP	LPS-RK-30SP
LPS-RK-4/10SP	LPS-RK-2 1/4SP	LPS-RK-6 1/4SP	LPS-RK-35SP
LPS-RK-1/2SP	LPS-RK-2 1/2SP	LPS-RK-7SP	LPS-RK-40SP
LPS-RK-6/10SP	LPS-RK-2 9/10SP	LPS-RK-8SP	LPS-RK-45SP
LPS-RK-8/10SP	LPS-RK-3SP	LPS-RK-9SP	LPS-RK-50SP
LPS-RK-1SP	LPS-RK-3 9/10SP	LPS-RK-10SP	LPS-RK-60SP
LPS-RK-1 1/4SP	LPS-RK-3 1/2SP	LPS-RK-12SP	—
LPS-RK-1 1/2SP	LPS-RK-4SP	LPS-RK-15SP	—
LPS-RK-1 9/10SP	LPS-RK-4 1/2SP	LPS-RK-17 1/2SP	—


Carton Quantity and Weight

Ampere Ratings	Carton Qty.	Weight*	
		Lbs.	Kg.
0-30	10	1.6	0.725
35-60	10	2.6	1.178

*Weight per carton.

CE logo denotes compliance with European Union Low Voltage Directive (50-1000 VAC, 75-1500 VDC). Refer to BIF document #8002 or contact Bussmann Application Engineering at 636-527-1270 for more information.

Dimensional Data

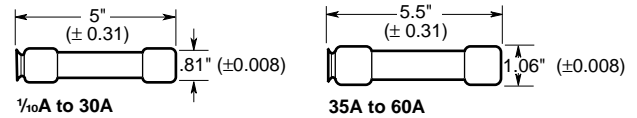


Features:

- Current-limitation for maximum short-circuit protection.
- Type 2 protection for IEC and NEMA starters when properly sized.
- High inrush current motor protection.
- Time-delay permits 130% FLA sizing for back-up motor protection.
- Protection against single-phase motor damage.
- Low watt loss power consumption.
- Electrically isolated end caps.
- 300 Vdc, U.L. Listed.

Applications:

- Branch distribution
- Motors
- Transformers
- Solenoids
- General purpose circuits



Current-Limitation Curve

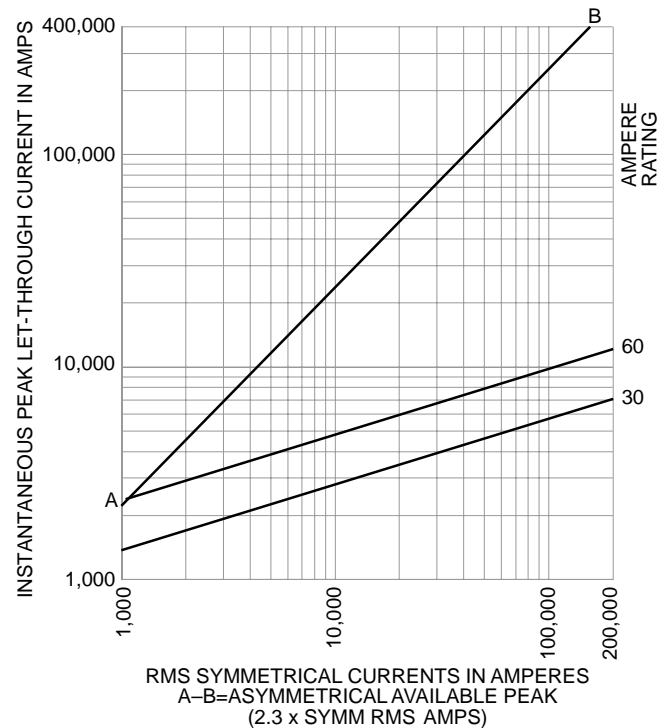

LOW-PEAK® Dual-Element, Time-Delay Fuses Class RK1 - 600 Volt

LPS-RK 0-60 Amps

Time-Current Characteristic Curves—Average Melt

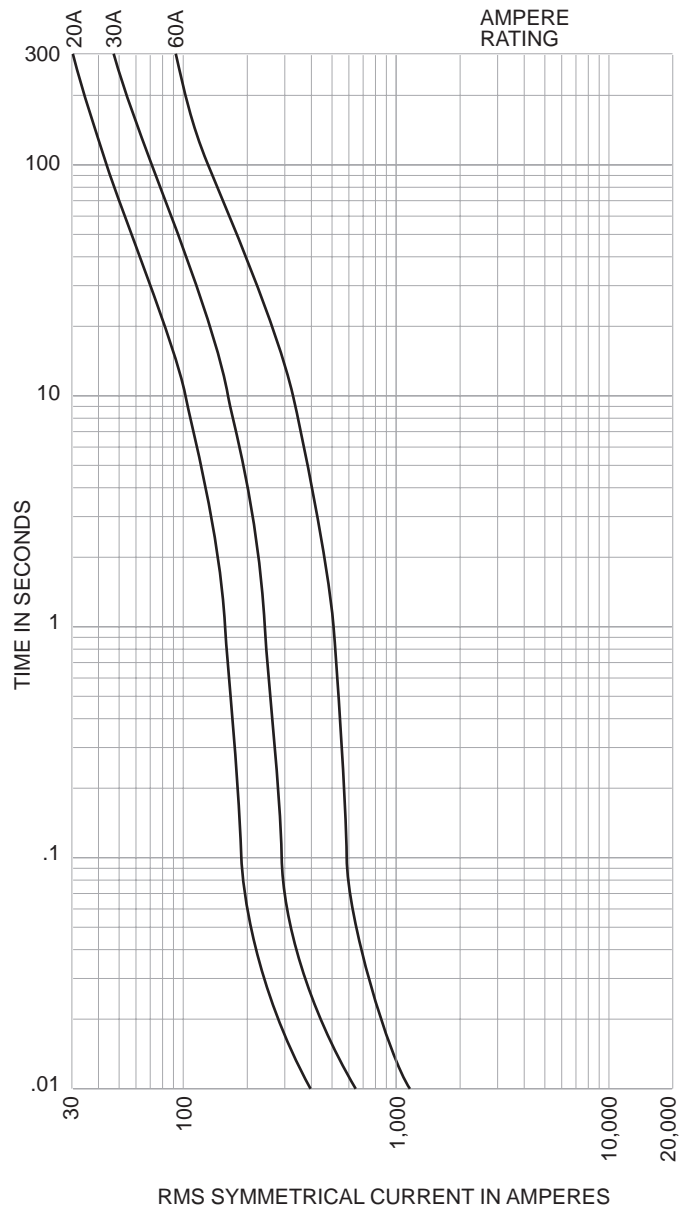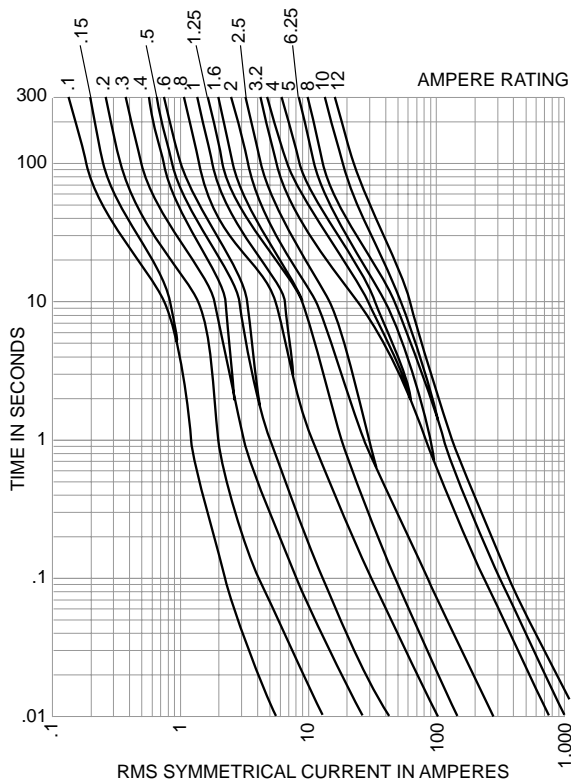

Fuseblocks:

30 Amp Case

	1 Pole	2 Pole	3 Pole
Box Lug	R60030-1CR	R60030-2CR	R60030-3CR
Screw	R60030-1SR	R60030-2SR	R60030-3SR
Pressure Plate	R60030-1PR	R60030-2PR	R60030-3PR

60 Amp Case

	1 Pole	2 Pole	3 Pole
Box Lug	R60060-1CR	R60060-2CR	R60060-3CR
Screw	R60060-1SR	R60060-2SR	R60060-3SR
Pressure Plate	R60060-1PR	R60060-2PR	R60060-3PR

The only controlled copy of this BIF document is the electronic read-only version located on the Bussmann Network Drive. All other copies of this document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.