



ELECTRICAL
MECHANICAL
INSULATION

CANUSG





FLAME
RETARDANT



2:1 to 3:1
STANDARD
SHRINK RATIO

Thin Wall Crosslinked
Polyolefin Kits

THINWALL KITS



CPXKITS

6" pieces of Flame Retardant,
single wall tubing in a variety
of colors and sizes

CPAKITS

6" pieces of Flame Retardant,
dual wall tubing in a variety of
colors and sizes

CPXREELS

Lengths of Flame Retardant,
single wall tubing, supplied in
a convenient reel form

Features

- CPX Kits & Reels are filled with 2:1 CPX 100 heat shrinkable tubing:
 - Meets UL, CSA and MIL-DTL-23053/5, Class 1 & 2
 - Excellent electrical and mechanical insulation
- CPA Kits are filled with 3:1 CPA 100 heat shrinkable tubing:
 - Meets MIL-DTL-23053/4, Class 3
 - Adhesive provides superior environmental protection




CPX KITS - Dimensions

CPXKIT-S Small Tubing Kit

ORDER REF. NO.	EXPANDED		RECOVERED				MINIMUM PIECES	KIT LENGTHS	
	INTERNAL DIAMETER (MIN)		INTERNAL DIAMETER (MAX)		WALL THICKNESS (NOM)				
	mm	IN	mm	IN	mm	IN			
Kits include all the diameters listed here	2.4	3/32	1.2	3/64	0.51	0.020	35	15.24	6
	3.2	1/8	1.6	1/16	0.51	0.020	28	15.24	6
	4.8	3/16	2.4	3/32	0.51	0.020	21	15.24	6
	6.4	1/4	3.2	1/8	0.64	0.025	21	15.24	6
	9.5	3/8	4.8	3/16	0.64	0.025	14	15.24	6
	12.7	1/2	6.4	1/4	0.64	0.025	14	15.24	6

CPXKIT-L Large Tubing Kit

ORDER REF. NO.	EXPANDED				RECOVERED		MINIMUM PIECES	KIT LENGTHS	
	INTERNAL DIAMETER (MIN)		INTERNAL DIAMETER (MAX)		WALL THICKNESS (NOM)				
	mm	IN	mm	IN	mm	IN			
Kits include all the diameters listed here	4.8	3/16	2.4	3/32	0.51	0.020	30	15.24	6
	6.4	1/4	3.2	1/8	0.64	0.025	28	15.24	6
	9.5	3/8	4.8	3/16	0.64	0.025	20	15.24	6
	12.7	1/2	6.4	1/4	0.64	0.025	14	15.24	6
	19.1	3/4	9.5	3/8	0.76	0.030	6	15.24	6
	25.4	1	12.7	1/2	0.89	0.035	4	15.24	6

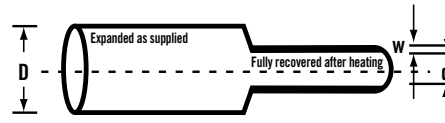

CPAKIT Dimensions

ORDER REF. NO.	EXPANDED		RECOVERED				MINIMUM PIECES	KIT LENGTHS	
	INTERNAL DIAMETER (MIN)		INTERNAL DIAMETER (MAX)		WALL THICKNESS (NOM)				
	mm	IN	mm	IN	mm	IN			
Kits include all the diameters listed here	3.2	1/8	0.6	0.023	1.0	0.038	28	15.24	6
	4.7	3/16	1.5	0.060	1.2	0.045	28	15.24	6
	6.4	1/4	2.0	0.080	1.3	0.047	21	15.24	6
	9.5	3/8	3.4	0.135	1.3	0.050	14	15.24	6
	12.7	1/2	5.0	0.195	1.4	0.055	7	15.24	6
	19.1	3/4	8.0	0.313	1.7	0.065	4	15.24	6

CPXREEL Dimensions

ORDER REF. NO. METRICIMPERIAL		EXPANDED		RECOVERED				STANDARD LENGTHS	
		INTERNAL DIAMETER (MIN)		INTERNAL DIAMETER (MIN)		WALL THICKNESS (NOM)			
XXXX	YYYY	mm	IN	mm	IN	mm	IN	AA IN	BB IN
0012	0047	1.2	3/64	0.6	3/128	0.45	0.018	1.2, 2.4	48, 96
0048	0625	1.6	1/16	0.8	1/32	0.45	0.018	1.2, 2.4	48, 96
0024	0094	2.4	3/32	1.2	3/64	0.51	0.020	1.2, 2.4	48, 96
0032	0125	3.2	1/8	1.6	1/16	0.51	0.020	1.2, 2.4	48, 96
0048	0187	4.8	3/16	2.4	3/32	0.51	0.020	1.2, 2.4	48, 96
0064	0250	6.4	1/4	3.2	1/8	0.64	0.025	1.2, 2.4	48, 96
0095	0375	9.5	3/8	4.7	3/16	0.64	0.025	1.2, 2.4	48, 96
0127	0500	12.7	1/2	6.4	1/4	0.64	0.025	1.2, 2.4	48, 96
0160	0625	16.0	5/8	8.0	5/16	0.76	0.030	1.2, 2.4	48, 96
0190	0750	19.0	3/4	9.5	3/8	0.76	0.030	1.2, 2.4	48, 96
0254	1000	25.4	1	12.7	1/2	0.89	0.035	1.2, 2.4	48, 96

CPXREEL Ordering

To Order in Metric Units:

Order Ref. No. Options
CPXREEL - XXXX - CC - OO - AA - M
 Color Standard Length

To Order in Imperial Units:

Order Ref. No. Options
CPXREEL - YYYY - CC - OO - BB - I
 Color Standard Length

Standard Colors (CC)

Order Code	Color	Order Code	Color
BK	BLACK	BE	BLUE
RD	RED	YW	YELLOW
WE	WHITE	GN	GREEN
CR	CLEAR		

Options (OO)

Unprinted	00
Printed	01

* For additional colors please see price list.

* Clear is not flame retardant.

CPX, CPA KIT Ordering

To Order; simply specify the Kit name

CPX KIT-S, CPX KIT-L, CPA KIT

REV 1

CANUSA

There's no end to what we cover

CANUSA is a global company providing electrical and mechanical insulation solutions for a variety of industries and applications. Starting from products created by extensive developmental research at Shaw Industries (incorporated 1955), CANUSA is a recognized world leader in the provisioning of high quality heat shrink products.

EUROPE

CANUSA SYSTEMS LIMITED

Bergstrand House

Broadley Industrial Park

Roborough, Plymouth, U.K. PL6 7EZ

Tel: 44 (0) 1752-209880

Fax: 44 (0) 1752-209850

U.S.A.

CANUSA

P.O. Box 498830

Cincinnati, Ohio 45249

Tel: 1-800-422-6872

Tel: (513) 683-7800

Fax: (513) 683-7809

CANADA/INTERNATIONAL

CANUSA

25 Bethridge Road

Toronto, Ontario M9W 1M7

Tel: 1-800-845-6808

Tel: (416) 743-7111

Fax: (416) 743-7199

WORLDWIDE WEB: www.dsgcanusa.com

All information contained in this leaflet is believed to be reliable. We advise however that customers should separately evaluate the suitability of our products for their particular application. CANUSA and Shaw Industries give no guarantees in respect of the accuracy or sufficiency of the information presented and disclaim any liability regarding its use. Our responsibilities are only those listed in our Standard Terms and Conditions of Sale for these products. In no instance will we be liable for any eventual, indirect, or consequential damage or damages arising from the sale, resale, transfer, use or misuse of the product.