


Rectangular Connectors MC Series

3 CONTACT COAX MODULES


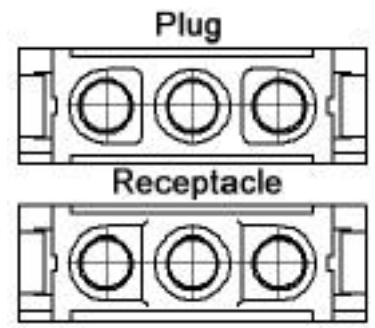


Plug	Receptacle	Rated Voltage	Cable Sizes	Impedance
10.3992	10.3993	250V	RG 58	50 Ohm

Contacts Sold Separately

DIN 41612

COAX CONTACTS

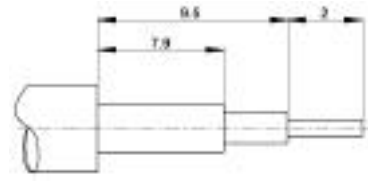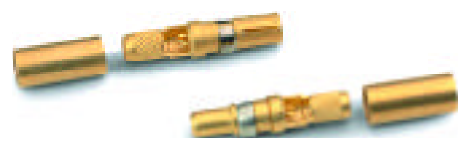

Silver		Wire Gauge
Pin	Socket	
11.2142	11.2192	RG 58

TOOLS


WIRE GAUGE: RG58



Crimp Dies
11.14713




Crimp Tool
11.1470

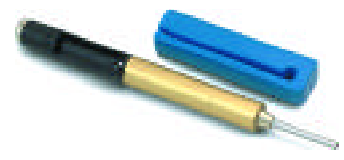

Removal Tool:
11.1711

Rectangular Connectors MC Series

3 CONTACT MODULES

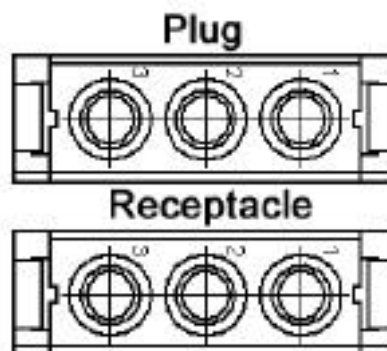

Plug	Receptacle	Rated Voltage	Rated Current
10.3820	10.3821	630V	40A

Contacts Sold Separately

MACHINED CONTACTS: DIAMETER 3.6MM



Bags of 20				
mm2	AWG	Silver		Stripping Length
		Pin	Socket	
1.5	16	11.2107	11.2157	10
2.5	14	11.2106	11.2156	10
4.0	12	11.2100	11.2150	10
6.0	10	11.2101	11.2151	10
10	8	11.2102	11.2152	10

TOOLS

WIRE GAUGE: 1.5 - 10MM2



Locator
11.147210



Crimp Dies
1.5 - 2.5: 11.147110
4.0 - 10: 11.147120



Crimp Tool
11.1470




Removal Tool:
11.1711

www.contactelectronics.com
800-221-1451

Rectangular Connectors MC Series

3 CONTACT HIGH VOLTAGE MODULES

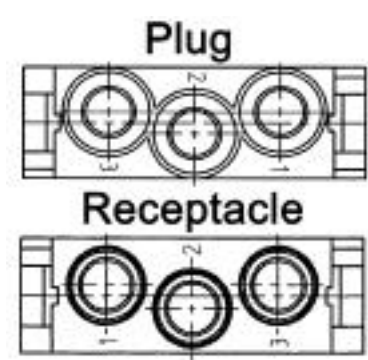

Plug	Receptacle	Rated Voltage	Rated Current
10.3998	10.3999	1000V	50A

Contacts Sold Separately

MACHINED CONTACTS: DIAMETER 3.6MM



Bags of 20				
mm2	AWG	Silver		Stripping Length
		Pin	Socket	
1.5	16	11.2107	11.2157	10
2.5	14	11.2106	11.2156	10
4.0	12	11.2100	11.2150	10
6.0	10	11.2101	11.2151	10
10	8	11.2102	11.2152	10

TOOLS

WIRE GAUGE: 1.5 - 10MM2



Locator
11.147210



Crimp Dies
1.5 - 2.5: 11.147110
4.0 - 10: 11.147120



Crimp Tool
11.1470



Removal Tool:
11.1711