

MAGNUM®

Series 1384X

Edge Connectors –
1 Sided Boards/Vertical Mount

SPECIFICATIONS

Rating: 10A, 250V

Center Spacing: .375" or 3/8" (9.52 mm)

Wire Size: #14-22 AWG CU; entry to PC board at 90° angle.

PC Board: Edge contact accepts standard 1/16" (.0625) PCB.

Contacts: Cantilever design .020" thick phosphorus bronze with mating surface gold plated (.000030) over nickel (.000100) tin plated (.000200) over copper (.000050).

Terminals: Pressure plate terminals.

Material: Black, UL Rated 94VO Thermoplastic (125°C)

Operating Temperature: -55°C to 105°C (212°F)

Approvals: UL E62622; CSA LR15364; CE Certified

13848-08G02B




13847-08TO2B



Poles	A	B	C	D
04	2.25	1.87	1.12	1.53
05	2.62	2.25	1.50	1.90
06	3.00	2.62	1.87	2.28
07	3.37	3.00	2.25	2.65
08	3.75	3.37	2.62	3.03
09	4.12	3.75	3.00	3.40
10	4.50	4.12	3.37	3.78
11	4.87	4.50	3.75	4.15
12	5.25	4.87	4.12	4.53
13	5.62	5.25	4.50	4.90
14	6.00	5.62	4.87	5.28
15	6.37	6.00	5.25	5.65
16	6.75	6.37	5.62	6.03

1384X Series

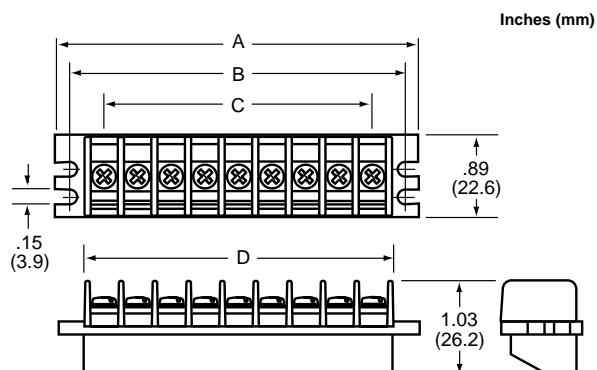

* Dimensions in inches. To convert to millimeters, multiply by 25.4.
Optional polarizing key (Part No. C5971) consult with factory.

Part Numbering System

Series	Block Style	Poles	Terminal Plating	Screw Style	Block Color	Special Options
1384X	n - 7 - Flat mtg. ears w/ 2 slots 8 - Mtg. ears w/2 standoffs with hole for mounting strip	nn 04 to 16	n T - Tin over copper G - Gold over nickel	02 #6-32 pan head. w/ SEMS wire clamp	B Black	n M - Marking strip