



Rail & Base Mount Terminal Blocks

NC3

Inches (Millimeters)

SPECIFICATIONS

Rating: 175A, 600V; UL/CSA
Center spacing: 1.06" (26.92)
Number of poles: 3
Circuits per foot: 11
Wire size: 2/0-#14 CU/AL
Screw size: 5/16-24
Mounting options: C-rail,
 Base Mount
Marking tape: MT12-1/2
Torque rating: 45 in/lb max.
Operating temperature: 105°C

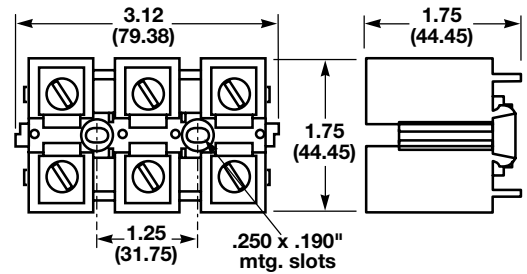

Optional LS3 Terminal Cover





BIF document: 1406

NSE3

Inches (Millimeters)

SPECIFICATIONS

Rating: 115A, 600V; UL/CSA
Center spacing: 1.06" (26.92)
Number of poles: 3
Circuits per foot: 11
Circuit jumper: JNSE3, 2 circuits
Wire size: For use with wire crimped
 to ring terminal.
Screw size: 1/4-28
Mounting options: C-rail, Base Mount
Marking tape: MT12-1/2
Operating temperature: 105°C

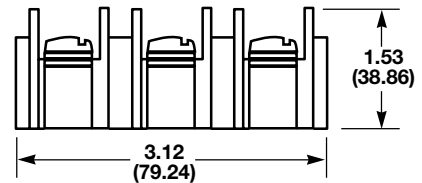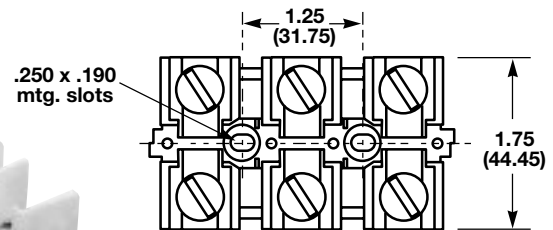

Optional LS3 Terminal Cover



BIF document: 1407

NSS3

Inches (Millimeters)

SPECIFICATIONS

Rating: 30A, 600V; UL/CSA
Center spacing: .385" (9.77)
Number of poles: 3
Circuits per foot: 28
Circuit jumper: JNSS3, 2 circuits
Wire size: For use with wire crimped
 to ring terminal.
Screw size: #6-32
Mounting options: C-rail
Marking tape: MT12-1/2
Operating temperature: 105°C



BIF document: 1408