


NDNV4

Inches (Millimeters)

SPECIFICATIONS

- Rating:** NDNV4 30A, 600V; UL/CSA
- Center spacing:** .250" (6.35)
- Number of poles:** 4
- Circuits per foot:** 48
- Circuit jumper:** JN4, 4 circuits
- Wire size:** AWG #10-22 CU
- Screw size:** #6-32
- Mounting options:** 35mm DIN rail, C-rail
- Marking tape:** MTC6
- Torque rating:** 18 in/lb max.
- Operating temperature:** 105°C

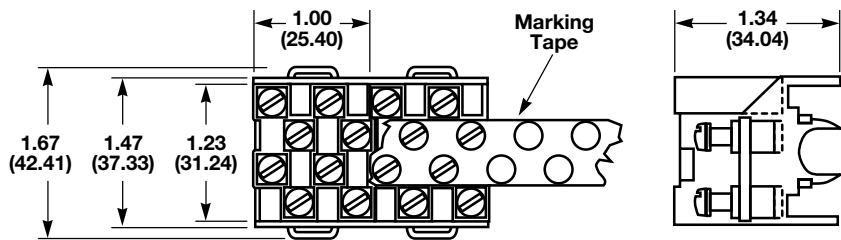

NDN3

Inches (Millimeters)

SPECIFICATIONS

- Rating:** 30A - field wiring; 40A - factory wiring
600V; UL/CSA
- Center spacing:** .300" (7.62)
- Number of poles:** 3
- Circuits per foot:** 38
- Circuit jumper:** JNDN3, 2 circuits
- Wire size:** AWG #10-22 CU
- Screw size:** #6-32
- Mounting options:** 35mm DIN rail, C-rail
- Marking tape:** MT12-1/2
- Torque rating:** 18 in/lb max.
- Operating temperature:** 105°C

