

## Series TB200 & TB200HB Double Row Terminal Blocks


### SPECIFICATIONS

Rating: TB200 – 20A, 300V\*  
 TB200HB – 20A, 600\*.  
 Center Spacing: .437" or 7/16" (11.10 mm)  
 Wire Size: #12 - 22 AWG CU  
 Screw Size: #6-32 philslot screws  
 Torque Rating: 9 in-lb. max.  
 Distance Between Barriers: .353" (8.97 mm)  
 Mounting: #6 screws  
 Materials: Molded base: Black, UL rated 94VO thermoplastic  
 Terminal plating: Tin over brass; Screws: Zinc plated steel  
 Operating Temperature: 130°C (260°F) max., -40°C (-40°F) min.  
 Breakdown Voltage: 4800V rms  
 Approvals: UL E62622; CSA LR15364; IEC Compliance;  
 CE Certified


\* Max. rating shown; some options may be rated lower - consult factory.

Poles	A	B	Poles	A	B	Poles	A	B
02	1.63	1.31	12	6.00	5.68	22	10.37	10.06
03	2.07	1.75	13	6.44	6.12	23	10.81	10.50
04	2.51	2.18	14	6.87	6.56	24	11.25	10.93
05	2.94	2.62	15	7.31	7.00	25	11.68	11.37
06	3.38	3.06	16	7.75	7.43	26	12.12	11.81
07	3.82	3.50	17	8.19	7.87	27	12.56	12.25
08	4.25	3.93	18	8.62	8.31	28	13.00	12.68
09	4.69	4.37	19	9.06	8.75	29	13.44	13.12
10	5.13	4.81	20	9.50	9.18	30	13.87	13.56
11	5.57	5.25	21	9.94	9.62			


\* Dimensions in inches. To convert to millimeters, multiply by 25.4.

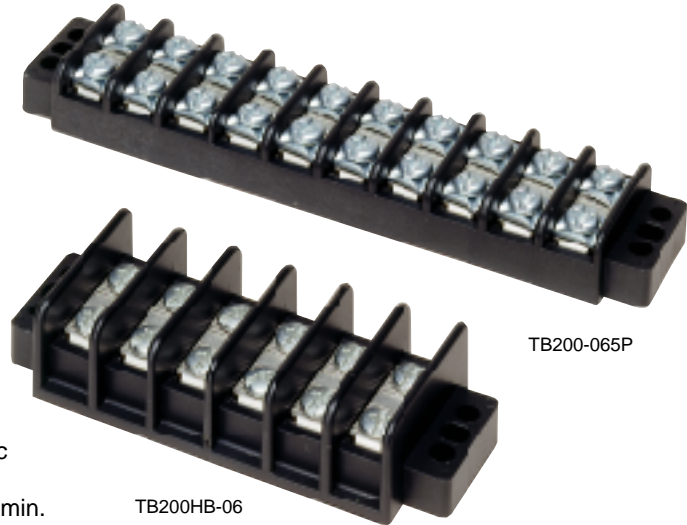

TB200

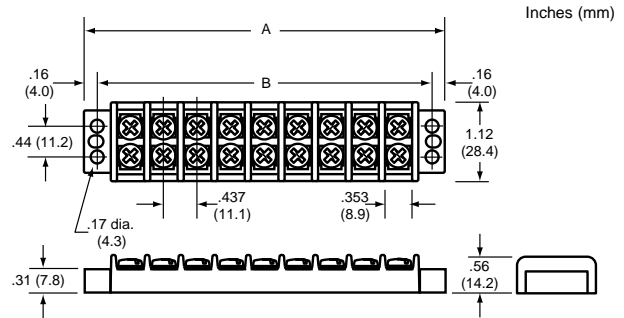

TB200HB

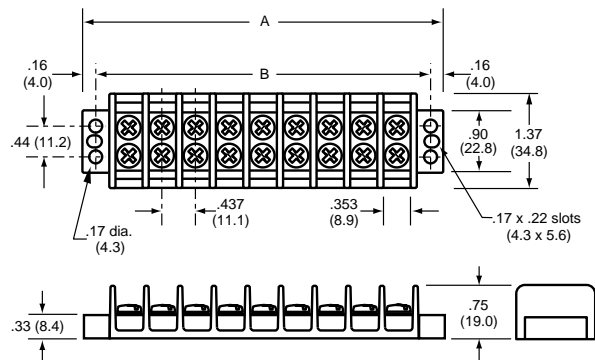

## Part Numbering System

Series

**TB200**nn-nn

200 - Standard  
 200HB - High barrier

Poles

02 to 30

Screw Options

nn

Blank - std. screws  
 00 - screws shipped bulk  
 B - brass philslot, nickel plated  
 BS - brass Sems philslot, zinc plated  
 SP - steel Sems philslot, zinc plated  
 ST - stainless steel, philslot

Marking

nn

L1 to L6 - std. marking  
 Marker strips (pg 33)  
 Covers (pg 32)

Hardware Options

nnnn

QC1 to QC20 - quick connects

# MAGNUM®

## Screw Options



**B**  
Brass Phillips  
Nickel Plated



**BS**  
Brass SEMS  
Phillips Nickel Plated




**SP**  
Steel SEMS  
Phillips Zinc Plated




**ST**  
Stainless Steel  
Phillips

## Hardware Options

Quick Connects – Assembled Terminals .250" x .031". Max. current rating 20 Amps. For other orientations, contact factory.

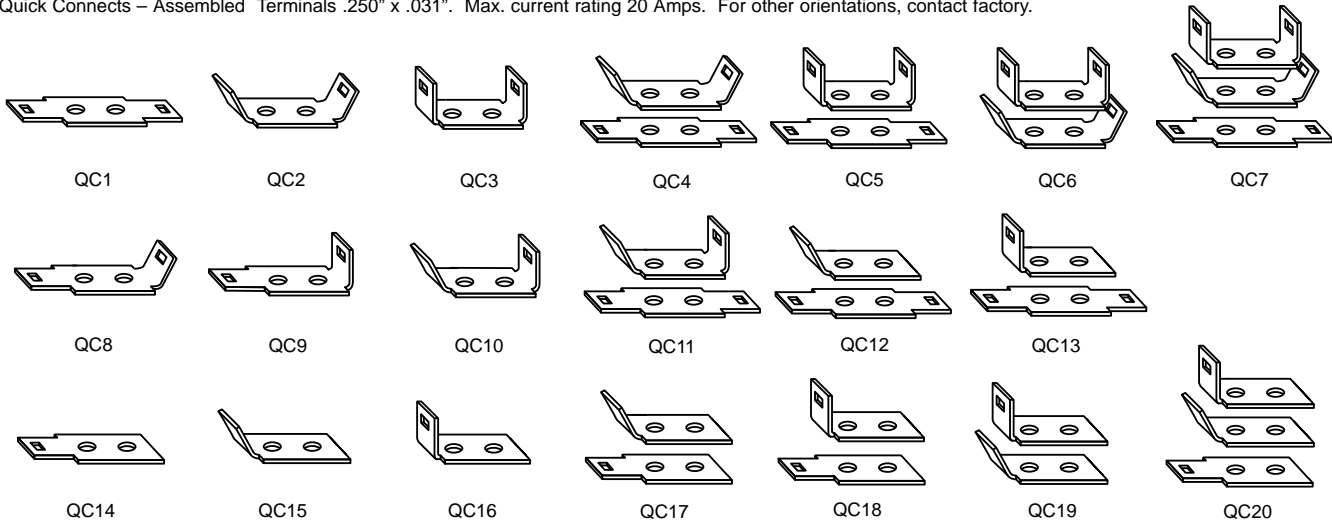

Quick Connects – Bulk Min. order per part no. – 100 pieces.

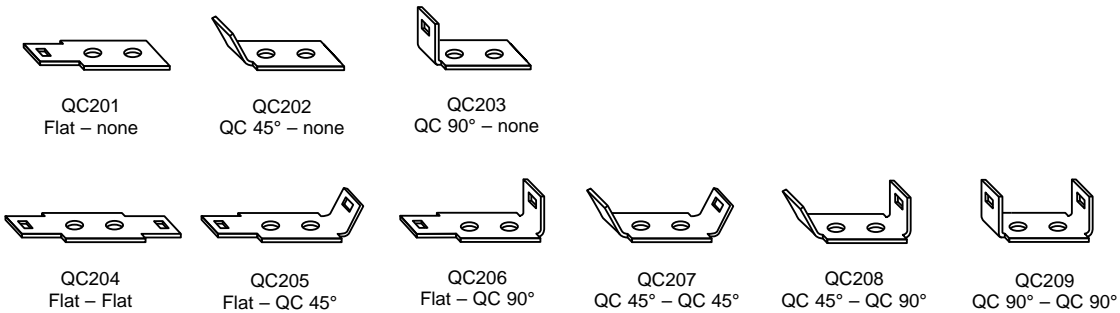

Jumpers – Bulk Min. order per part no. – 100 pieces. Contact factory for jumper assembly.

