

## Series TB400 Double Row Terminal Blocks

### SPECIFICATIONS


Rating: 75A, 600V\*  
 \* 75A max. with pressure terminal connector and #4 AWG;  
 30A max. with #10 AWG;  
 Center Spacing: .687" or 11/16" (17.45 mm)  
 Wire Size: #10-14 AWG CU  
 Screw Size: #10-32 philslot screws  
 Torque Rating: 20 in-lb.  
 Distance Between Barriers: .56" (14.3 mm)  
 Mounting: #10 screws  
 Material: Molded base: Black, UL rated 94VO thermoplastic  
 Terminal plating: Tin over brass; Screws: Zinc plated steel  
 Operating Temperature: 130°C (260°F) max., -40°C (-40°F) min.  
 Breakdown Voltage: 7500V rms  
 Approvals: UL E62622; CSA LR15364; IEC Compliance;  
 CE Certified



TB400-05

Poles	A	B	Poles	A	B	Poles	A	B
02	2.51	2.06	06	5.26	4.81	10	8.01	7.56
03	3.20	2.75	07	5.95	5.50	11	8.70	8.25
04	3.89	3.44	08	6.64	6.19	12	9.39	8.94
05	4.58	4.13	09	7.33	6.88			

\* Dimensions in inches. To convert to millimeters, multiply by 25.4.

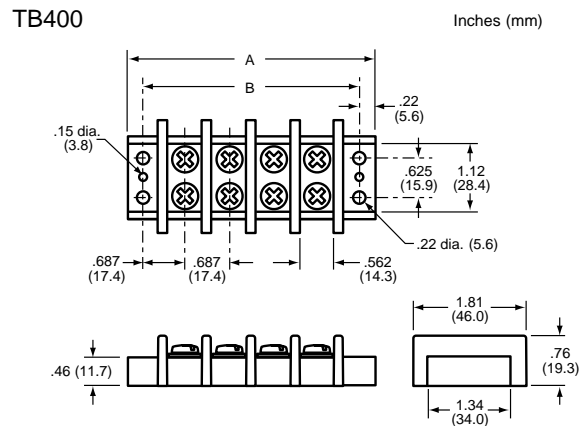

### Screw Options



B  
Brass Philslot  
Nickel Plated



ST  
Stainless Steel  
Philslot

### Part Numbering System

Series	Poles	Screw Options	Marking	Hardware Options
TB400	- nn 02 to 12	nn Blank - std. screws 00 - screws shipped bulk B - brass philslot, nickel plated ST - stainless steel, philslot	Not available	Not available