

CC Fuse Holders - 600 Volt

Specifications:

30 Amp

Have Been Tested & Approved for
200,000 Amp Interrupting Capacity
Clip, Copper Alloy, Tin Plated
with Patented Reject Member
UL Listed File No. E35113
CSA Certified File No. LR21455




Quick Connect Standard with Screw (S)
or Sems Pressure (SP)

60 Amp

Have Been Tested & Approved for
200,000 Amp Interrupting Capacity
Patented Cool Clip® Design
Clip, Copper Alloy, Tin Plated
with Patented Reject Member
UL Recognized E35113
CSA Certified LR 21455-91



Integral Din Rail Mount
Expander Block Available

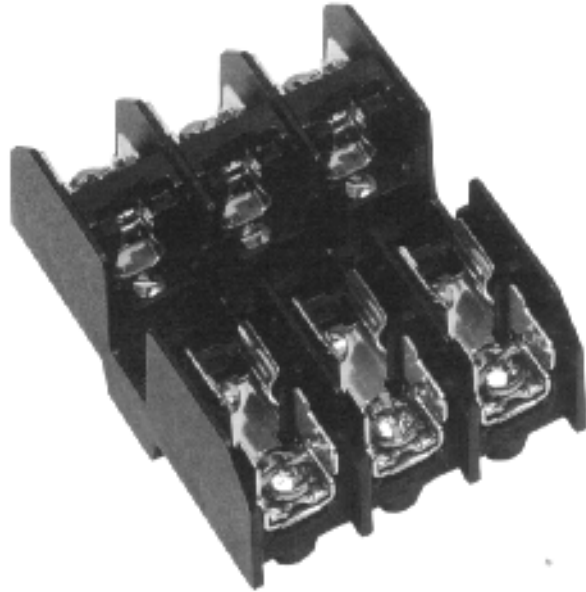

Catalog#:

<u>Std.</u>	<u>Reinforced</u>	<u>Poles</u>	<u>Amp</u>	<u>Base Material</u>	<u>Wire Range</u>	<u>Fuse Size</u>
6CC30A1SQ	N/A	1	30	Thermoplastic	#10-#14 AWG CU	13/32" DIA BY 1 1/2"
6CC30A2SQ		2				
6CC30A3SQ		3				
6CC30A1SPQ	N/A	1	30	Thermoplastc	#10-#14 AWG CU	
6CC30A2SPQ		2				
6CC30A3SPQ		3				
6CC30A1B	N/A	1	30	Thermoplastic	#6-#14 AWG CU	
6CC30A2B		2				
6CC30A3B		3				
6CC30A1BCU	N/A	1	30	Thermoplastic	#6-#14 AWG CU	
6CC30A2BCU		2				
6CC30A3BCU		3				
R6CC60A1B	SAME	1	60	Thermoplastic	#2-#14 AWG CU #2-#12 AWG AL	0.70" DIA BY 1.85"
R6CC60A2B	SAME	2				
R6CC60A3B	SAME	3				
R6CC60AEB	EXPANDER					