

Class G Fuse Holders - 480 Volt

Specifications:

Clip, Copper Alloy, Tin Plated

with Patented Reject Member


UL Listed File No. E35113

CSA Certified File No. LR21455

CE

Quick Connect Standard with Screw (S)

or Sems Pressure (SP)

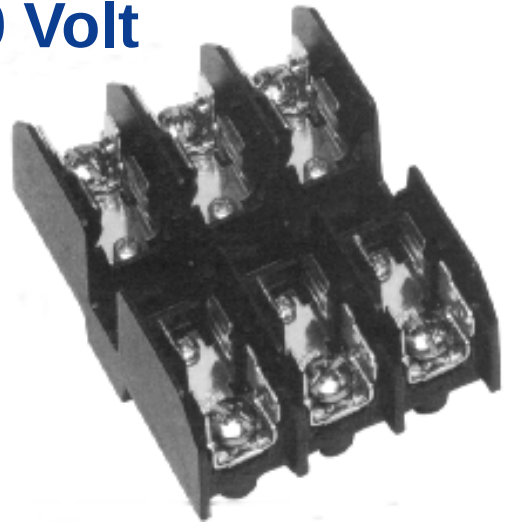

1/2-15 Amps

Catalog #:				Base	Wire	Fuse
Std.	Reinforced	Poles	Amp	Material	Range	Size
G15A1SQ	RG15A1SQ	1	15	Thermoplastic	#10-#22 AWG CU	13/32" DIA BY 1 5/16"
G15A2SQ	RG15A2SQ	2				
G15A3SQ	RG15A3SQ	3				
G15A1SPQ	RG15A1SRQ	1	15	Thermoplastic	#10-#14 AWG CU	
G15A2SPQ	RG15A2SPQ	2				
G15A3SPQ	RG15A3SPQ	3				
G15A1B	RG15A1B	1	15	Thermoplastic	#6-#14 AWG CU	
G15A2B	RG15A2B	2				
G15A3B	RG15A3B	3				
G15A1BCU	RG15A1BCU	1	15	Thermoplastic	#6-#14 AWG CU	
G15A2BCU	RG15A2BCU	2				
G15A3BCU	RG15A3BCU	3				

20 Amps

Catalog #:				Base	Wire	Fuse
Std.	Reinforced	Poles	Amp	Material	Range	Size
G20A1SQ	RG20A1SQ	1	20	Thermoplastic	#10-#22 AWG CU	13/32" DIA BY 1 13/32"
G20A2SQ	RG20A2SQ	2				
G20A3SQ	RG20A3SQ	3				
G20A1SPQ	RG20A1SRQ	1	20	Thermoplastic	#10-#14 AWG CU	
G20A2SPQ	RG20A2SPQ	2				
G20A3SPQ	RG20A3SPQ	3				
G20A1B	RG20A1B	1	20	Thermoplastic	#6-#14 AWG CU	
G20A2B	RG20A2B	2				
G20A3B	RG20A3B	3				
G20A1BCU	RG20A1BCU	1	20	Thermoplastic	#6-#14 AWG CU	
G20A2BCU	RG20A2BCU	2				
G20A3BCU	RG20A3BCU	3				

25-30 Amps

Catalog #:				Base	Wire	Fuse
Std.	Reinforced	Poles	Amp	Material	Range	Size
G30A1SQ	RG30A1SQ	1	30	Thermoplastic	#10-#22 AWG CU	13/32" DIA BY 1 5/8"
G30A2SQ	RG30A2SQ	2				
G30A3SQ	RG30A3SQ	3				
G30A1SPQ	RG30A1SRQ	1	30	Thermoplastic	#10-#14 AWG CU	
G30A2SPQ	RG30A2SPQ	2				
G30A3SPQ	RG30A3SPQ	3				
G30A1B	RG30A1B	1	30	Thermoplastic	#6-#14 AWG CU	
G30A2B	RG30A2B	2				
G30A3B	RG30A3B	3				
G30A1BCU	RG30A1BCU	1	30	Thermoplastic	#6-#14 AWG CU	
G30A2BCU	RG30A2BCU	2				
G30A3BCU	RG30A3BCU	3				