


# Class H Fuse Panels

## 30 and 60 Amp 250 Volt

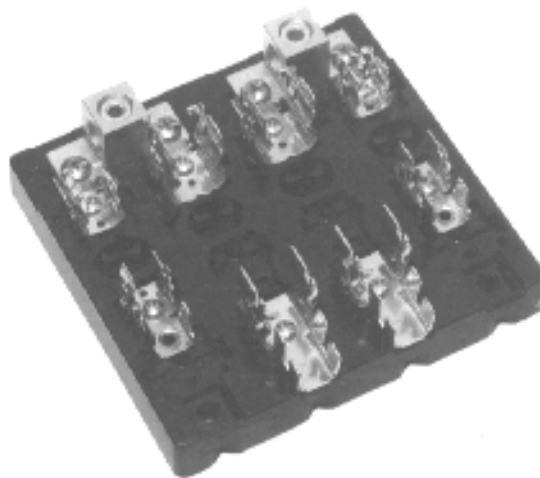

### Specifications

Base, General Purpose Phenolic, 150° C

Patented Cool Clip® Design

Clip, Copper Alloy, Tin Plated

UL Recognized File No. E35113

CSA Certified File No. LR21455


CE

Reinforcing Member Available

Bus Bars are Available with #2/0 - #14 Awg or 250 MCM - #6 Wire Ranges


Consult Factory for Special Requirements

### ORDERING CODE

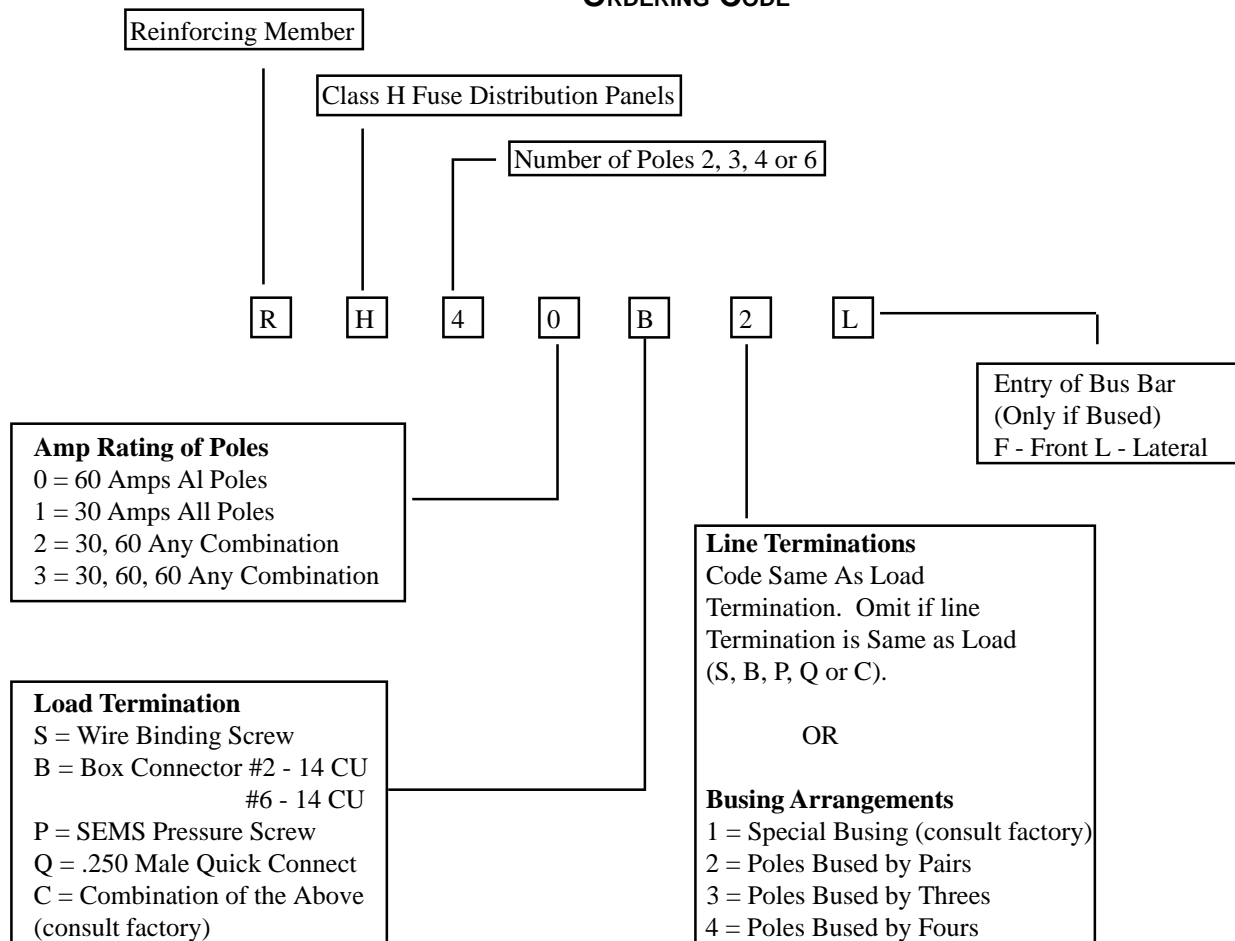


# Class H Fuse Panels (Con'd)

30 and 60 Amp 250 Volt

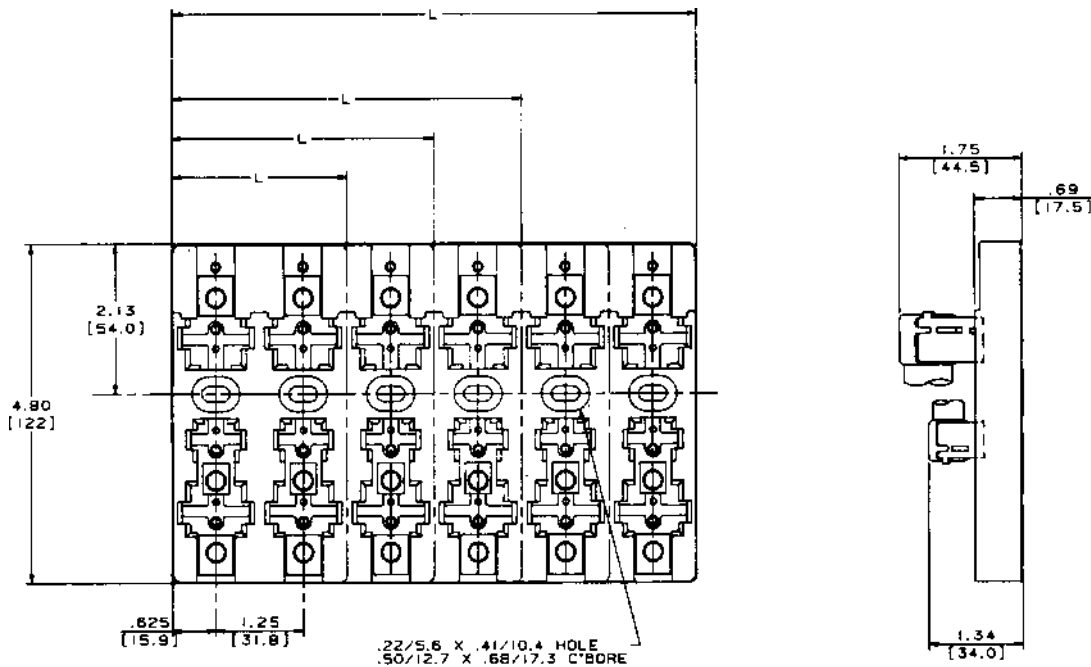

POLES No.	DIMENSIONS (IN) L	(MM)	POLES No.	DIMENSIONS (IN) L	(MM)
2	2.50	63.5	4	5.00	127.0
3	3.75	92.25	6	7.50	190.5

## Fuse Distribution Panel Options

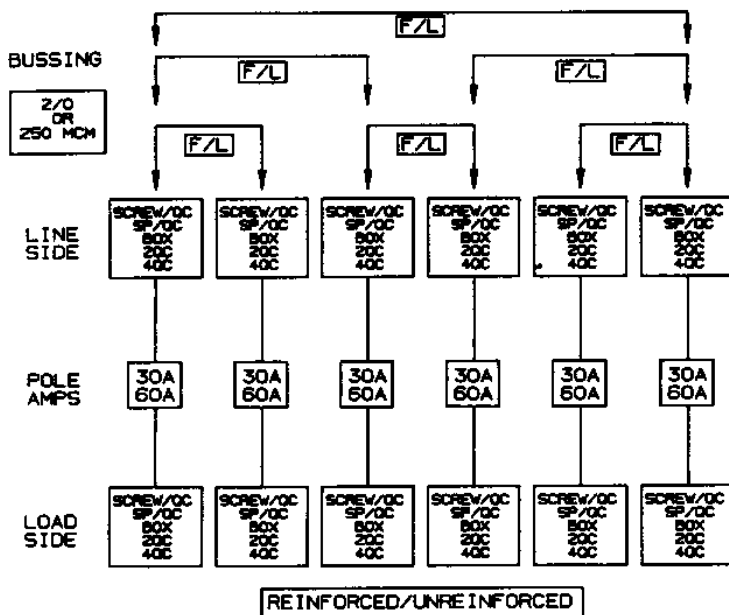

CIRCLE/INDICATE ONE ITEM PER POLE AND NUMBER OF POLES. THE ITEMS TO BE INDICATED ARE WITHIN THE RETANGLES.

IF BUSSING, INDICATE LUG SIZE 2/O OR 250MCM, AND CAN NOT INDICATE OTHER THAN BUSSING ON LINE SIDE. (F=FRONT ENTRY L=LATERAL ENTRY)

CONSULT FACTORY FOR OTHER MODIFICATIONS.