

# Double Row Terminal Blocks

## Kulka® 601 GP Series

300 Volts

### Specifications:

Base, General Purpose Phenolic, 150° C

JJ (GDI-30F) material is available

Open Back Design

Screws, #6-32 Binder Head, Phil-Slot

Terminals, Plated Brass

1-23 Poles

7/16" Centers

Wire Range with Wire Binding Screw #12 - #22 Awg - 20 Amps


Will Accommodate Lugs for Wire Sizes #10 - #16 Awg - 30 Amps

The Suitability of These Devices for Greater Currents Shall Be Determined in the End-Use Application.

UL Recognized File No. E47811

CSA Certified File No. LR19766

CE

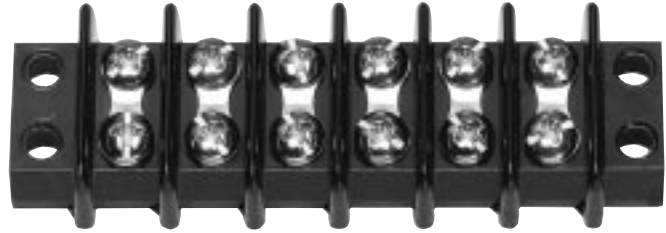

| Catalog # | # of Poles | Dimensions |      | Catalog # | # of Poles | Dimensions |       |
|-----------|------------|------------|------|-----------|------------|------------|-------|
|           |            | A          | B    |           |            | A          | B     |
| 601 GP 01 | 1          | .88        | 1.19 | 601 GP 13 | 13         | 6.13       | 6.44  |
| 601 GP 02 | 2          | 1.31       | 1.63 | 601 GP 14 | 14         | 6.56       | 6.88  |
| 601 GP 03 | 3          | 1.75       | 2.06 | 601 GP 15 | 15         | 7.00       | 7.31  |
| 601 GP 04 | 4          | 2.19       | 2.50 | 601 GP 16 | 16         | 7.44       | 7.75  |
| 601 GP 05 | 5          | 2.63       | 2.94 | 601 GP 17 | 17         | 7.88       | 8.19  |
| 601 GP 06 | 6          | 3.06       | 3.38 | 601 GP 18 | 18         | 8.31       | 8.63  |
| 601 GP 07 | 7          | 3.50       | 3.81 | 601 GP 19 | 19         | 8.75       | 9.06  |
| 601 GP 08 | 8          | 3.94       | 4.25 | 601 GP 20 | 20         | 9.19       | 9.50  |
| 601 GP 09 | 9          | 4.38       | 4.69 | 601 GP 21 | 21         | 9.63       | 9.94  |
| 601 GP 10 | 10         | 4.81       | 5.13 | 601 GP 22 | 22         | 10.06      | 10.38 |
| 601 GP 11 | 11         | 5.25       | 5.56 | 601 GP 23 | 23         | 10.50      | 10.81 |
| 601 GP 12 | 12         | 5.69       | 6.00 |           |            |            |       |

Top Mounted Hardware is .250" Wide

### Hardware Options:

|          |   |                               |
|----------|---|-------------------------------|
| KT 37    | = | Full Quick Connect (0° flat)  |
| KT 38    | = | Full Quick Connect (45° Bend) |
| KT 39    | = | Full Quick Connect (90° Bend) |
| ST       | = | Full Solder                   |
| LL(J601) | = | Line to Line Jumper           |
| 3/4 ST   | = | Half Solder                   |
| KT 43    | = | Half Quick Connect (0° Flat)  |
| KT 44    | = | Half Quick Connect (45° Bend) |
| KT 45    | = | Half Quick Connect (90° Bend) |
| 3765     | = | Wire Clamp Screw              |
| Y        | = | Feed Thru Solder (.422)       |
| YSY      | = | Feed Thru Solder (.687)       |

