


Double Row Terminal Blocks

Kulka® 604 GP Series

600 Volts

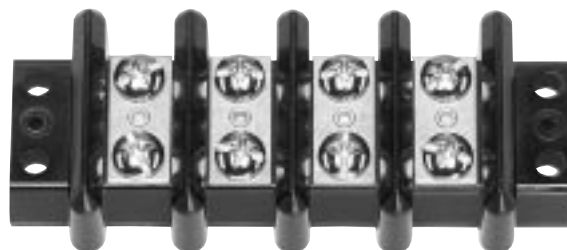

Specifications:

Base, General Purpose Phenolic, 150° C

JJ (GDI-30F) Material is Available

Open Back Design

Screws, #12-32 Binder Head, Phil-Slot

Terminals, Plated Brass

1-8 Poles

14/16" Centers

Wire Range with Wire Binding Screw #4 - #12 Awg - 70 Amps

The Suitability of These Devices for Greater Currents Shall Be Determined in the End-Use Application.

UL Recognized File No. E47811

CSA Certified File No. LR19766

CE

Catalog #	# of Poles	Dimensions	
		A	B
604 GP01	1	1.75	2.28
604 GP02	2	2.63	3.16
604 GP03	3	3.50	4.03
604 GP04	4	4.38	4.91
604 GP05	5	5.25	5.78
604 GP06	6	6.13	6.66
604 GP07	7	7.00	7.53
604 GP08	8	7.88	8.41

Hardware Options:

2402 = Stud 10 - 32 Brass (.43 H) Nuts Included

