


Double Row Terminal Blocks

671 RZ Series 300 Volts

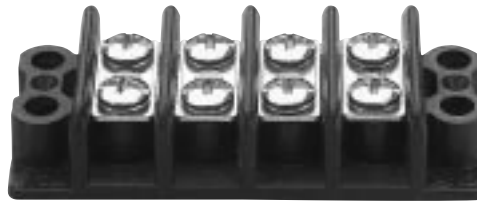

Specifications:

Base, Thermoplastic, 110° C
(U.L. RTI w/o IMPACT)
Closed Back Design
Screws, #6-32 Binder Head, Phil-Slot
Terminals, Plated Brass
1-30 Poles
The Suitability of These Devices
for Greater Currents or Voltage
Requirements Shall be
Determined in the End-Use Application

Flammability Rating 94 V-O
7/16" Centers
Wire Range with Wire Binding
Screw #12 - #22 Awg - 20 Amps
Wire Range with Sems Pressure
Screw #12 - #22 Awg Stranded Copper Wire Only - 20 Amps
Will Accommodate Lugs for Wire Sizes #10-#16 Awg - 30 Amps
UL Recognized File No. E62806
CSA Certified File No. LR19766
CE

Catalog #	# of Poles	Dimensions		Catalog#	# of Poles	Dimensions	
		A	B			A	B
671 RZ 01	1	1.19	.88	671 RZ 16	16	7.75	7.44
671 RZ 02	2	1.62	1.31	671 RZ 17	17	8.19	7.88
671 RZ 03	3	2.06	1.75	671 RZ 18	18	8.62	8.31
671 RZ 04	4	2.50	2.19	671 RZ 19	19	9.06	8.75
671 RZ 05	5	2.94	2.62	671 RZ 20	20	9.50	9.19
671 RZ 06	6	3.38	3.06	671 RZ 21	21	9.94	9.62
671 RZ 07	7	3.81	3.50	671 RZ 22	22	10.38	10.06
671 RZ 08	8	4.25	3.94	671 RZ 23	23	10.81	10.50
671 RZ 09	9	4.69	4.38	671 RZ 24	24	11.25	10.94
671 RZ 10	10	5.12	4.81	671 RZ 25	25	11.69	11.38
671 RZ 11	11	5.56	5.25	671 RZ 26	26	12.12	11.81
671 RZ 12	12	6.00	5.69	671 RZ 27	27	12.56	12.25
671 RZ 13	13	6.44	6.12	671 RZ 28	28	13.00	12.69
671 RZ 14	14	6.88	6.56	671 RZ 29	29	13.44	13.12
671 RZ 15	15	7.31	7.00	671 RZ 30	30	13.88	13.56

Top Mounted Hardware is .250" Wide

Hardware Options:

KT 37 = Full Quick Connect (0° flat)
KT 38 = Full Quick Connect (45° Bend)
KT 39 = Full Quick Connect (90° Bend)
ST = Full Solder
LL(J601) = Line to Line Jumper
3/4 ST = Half Solder
KT 43 = Half Quick Connect (0° Flat)
KT 44 = Half Quick Connect (45° Bend)
KT 45 = Half Quick Connect (90° Bend)
SP(3765) = Sems Pressure Saddle Screw
SPSE(3767) = Sems Pressure Saddle Screw
with External Tooth Lock Washer

