


41TB-Military Class (MIL-T-55164/5)

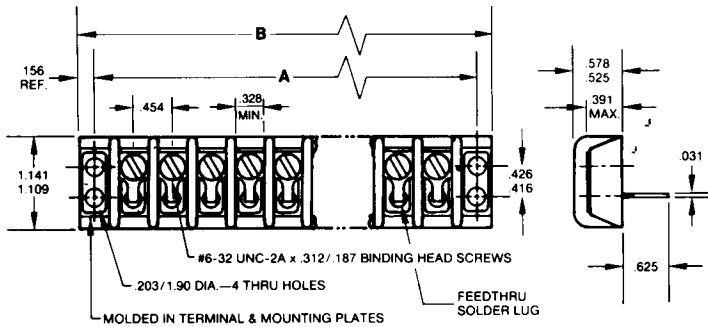

Molded Material:

Same as 38 TB Class

Hardware: Lug, Brass per QQ-B-613, tin plated

Electrical Rating:


Rated voltage (maximum): 600 volts

Current rating: 10 Amps

D.W.V.: 3400 volts RMS

Military Type Designation	Dimension B	Dimension A
41TB02F	1.579-1.672	1.296-1.343
41TB03F	2.016-2.109	1.734-1.781
41TB04F	2.454-2.547	2.172-2.219
41TB05F	2.891-2.984	2.609-2.656
41TB06F	3.329-3.422	3.046-3.093
41TB07F	3.766-3.859	3.484-3.531
41TB08F	4.204-4.297	3.937-3.984
41TB09F	4.641-4.734	4.375-4.422
41TB10F	5.079-5.172	4.812-4.859
41TB11F	5.532-5.625	5.250-5.297
41TB12F	5.969-6.078	5.687-5.734
41TB13F	6.407-6.516	6.110-6.188
41TB14F	6.844-6.953	6.547-6.625
41TB15F	7.282-7.391	6.985-7.063
41TB16F	7.719-7.828	7.422-7.500
41TB17F	8.157-8.266	7.860-7.938
41TB18F	8.594-8.703	8.297-8.375
41TB19F	9.079-9.156	8.750-8.828
41TB20F	9.517-9.594	9.188-9.266
41TB21F	9.954-10.031	9.625-9.703
41TB22F	10.392-10.469	10.063-10.141
41TB23F	10.829-10.906	10.500-10.578

42TB-Military Class (MIL-T-55164/6)

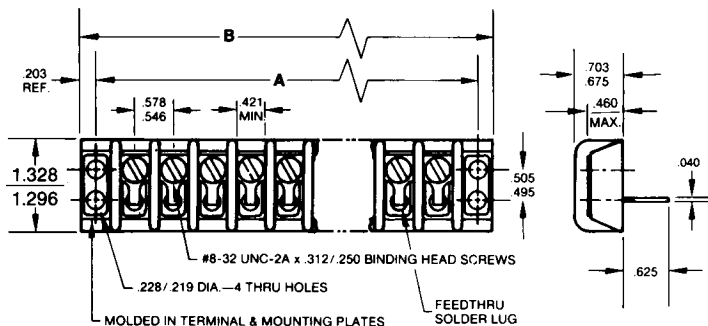

Molded Material:

Same as 39 TB Class

Hardware: Lugs, Brass per QQ-B-613, tin plated

Electrical Rating:

Rated voltage (maximum): 600 volts

Current rating: 20 Amps

D.W.V.: 3400 volts RMS

Military Type Designation	Dimension B	Dimension A
42TB02F	2.047-2.140	1.672-1.719
42TB03F	2.626-2.719	2.234-2.281
42TB04F	3.188-3.281	2.796-2.843
42TB05F	3.750-3.843	3.359-3.406
42TB06F	4.313-4.406	3.922-3.969
42TB07F	4.876-4.969	4.484-4.531
42TB08F	5.438-5.531	5.046-5.093
42TB09F	6.000-6.109	5.625-5.672
42TB10F	6.563-6.672	6.172-6.250
42TB11F	7.126-7.235	6.719-6.797
42TB12F	7.688-7.797	7.297-7.375
42TB13F	8.250-8.359	7.860-7.938
42TB14F	8.813-8.922	8.422-8.500
42TB15F	9.376-9.485	8.985-9.063
42TB16F	9.938-10.047	9.547-9.625
42TB17F	10.500-10.609	10.110-10.188
42TB18F	11.079-11.188	10.672-10.750