

Heavy Duty Terminal Blocks

1100 Series — Deadfront Type 600 Volts



Specifications

Base, General Purpose Phenolic, 150° C
 Connector, Aluminum Tin Plated
 Spring, Copper, Use 11XXS
 Screws, Brass Tin Plated
 Wire Range #6-#18 Awg CU — 65 Amps
 Wire Range with Spring #6-#14 Awg CU — 65 Amps
 UL Recognized File No. E62806
 CSA Certified File No. LR19766
 C€ - Wire Range Reduced #8-#18 Awg CU




Catalog #	Catalog #	# of Poles	A	B
1102	1102S	2	1.69	1.31
1104	1104S	4	2.50	2.12
1106	1106S	6	3.38	3.00
1107	1107S	7	3.88	3.50
1108	1108S	8	4.25	3.88
1112	1112S	12	6.00	5.62

S=Copper Pressure Spring

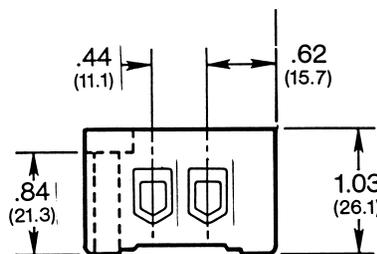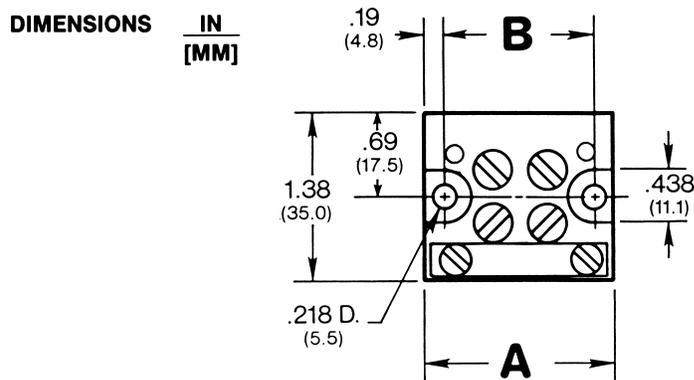

1100



1100S