

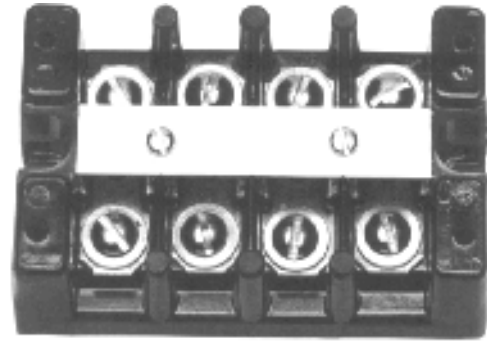
# Heavy Duty Terminal Blocks

## 1500 Series 600 Volts







### Specifications

Base, General Purpose Phenolic, 150° C  
 Connector, Brass Nickel Plated  
 Screws, Brass Nickel Plated, 10-32  
 Wire Range #10 to #16 Awg Copper Wire — 30 Amps  
 With Proper Termination Approved for 75 Amp  
 5/8" Line to Line Spacing  
 UL Recognized File No. E62806  
 CSA Certified File No. LR19766

CE

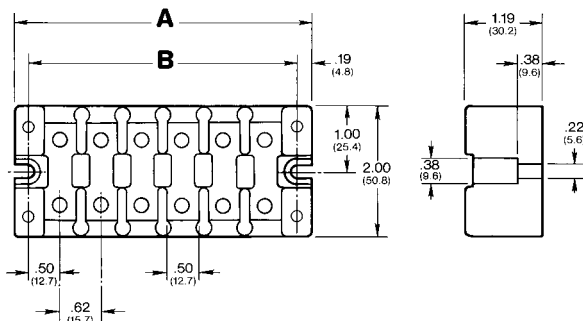


| Catalog # | # of Poles | Catalog # | # of Poles |
|-----------|------------|-----------|------------|
| 1504 STD  | 4          | 1504 ST   | 4          |
| 1506 STD  | 6          | 1504 ST   | 6          |
| 1508 STD  | 8          | 1508 ST   | 8          |
| 1512 STD  | 12         | 1512 ST   | 12         |
| 1504 DJ   | 4          | 1504 SC   | 4          |
| 1506 DJ   | 6          | 1506 SC   | 6          |
| 1508 DJ   | 8          | 1508 SC   | 8          |
| 1512 DJ   | 12         | 1512 SC   | 12         |
| 1504 DJSV | 4          | 1504 H    | 4          |
| 1506 DJSV | 6          | 1506 H    | 6          |
| 1508 DJSV | 8          | 1508 H    | 8          |
| 1512 DJSV | 12         | 1512 H    | 12         |

| 1500 STD                                                                            | 1500 DJ                                                                             | 1500 DJSV                                                                           | 1500 ST*                                                                            | 1500 SC                                                                               | 1500 H                                                                                |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  |  |  |  |  |  |
| standard connector                                                                  | removable connector with brass insert                                               | removable connector with brass insert removable cover                               | 10-32 stud connector removable connector                                            | short circuiting bar with brass insert 4 shorting pins per block                      | standard connector with hinge cover                                                   |

\*STRC: 10 - 32 Stud with Riveted Connector  
 MCJ - Jumper Available

DIMENSIONS  
 IN  
 [MM]



| Catalog # | # of Poles | A    | B    |
|-----------|------------|------|------|
| 1504      | 4          | 3.25 | 2.88 |
| 1506      | 6          | 4.50 | 4.12 |
| 1508      | 8          | 5.75 | 5.38 |
| 1512      | 12         | 8.25 | 7.88 |