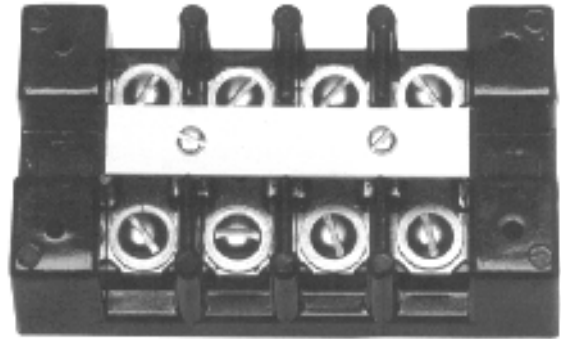


Heavy Duty Terminal Blocks







1600 Series 600 Volts

Specifications

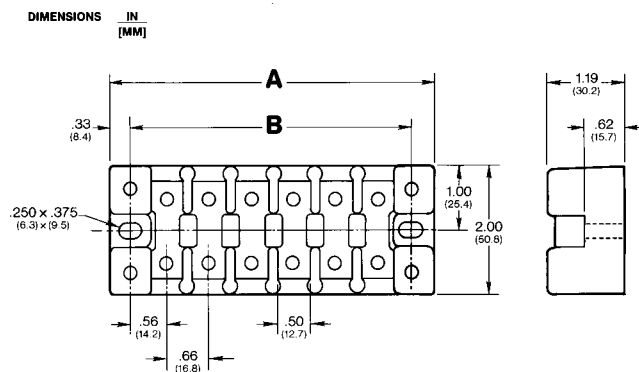
Base, General Purpose Phenolic, 150° C
 Connector, Brass Nickel Plated
 Screws, Brass Nickel Plated, 10-32
 Wire Range #10-#16 Awg Copper Wire -- 30 Amps
 With Proper Termination Approved for 75 Amp
 21/32" Line to Line Spacing
 UL Recognized File No. E62806
 CSA Certified File No. LR19766
 CE



Catalog #	# of Poles	Catalog #	# of Poles
1606 STD	6	1606 ST	6
1608 STD	8	1608 ST	8
1612 STD	12	1612 ST	12
1604 DJ	4	1604 SC	4
1606 DJ	6	1606 SC	6
1608 DJ	8	1608 SC	8
1612 DJ	12	1612 SC	12
1604 DJSV	4	1604 H	4
1606 DJSV	6	1606 H	6
1608 DJSV	8	1608 H	8
1612 DJSV	12	1612 H	12

1600 STD	1600 DJ	1600 DJSV	1600 ST*	1600 SC	1600 H
					
standard connector	removable connector with brass insert	removable connector with brass insert removable cover	10-32 stud connector removable connector	short circuiting bar with brass insert 4 shorting pins per block	standard connector with hinge cover

*STRC: 10 - 32 Stud with Riveted Connector
 MCJ - Jumper Available



Catalog #	# of Poles	A	B
1604	4	3.75	3.09
1606	6	5.06	4.41
1608	8	6.38	5.72
1612	12	9.00	8.34