


Heavy Duty Terminal Blocks

985 GP Series

Deadfront Type 600 Volts

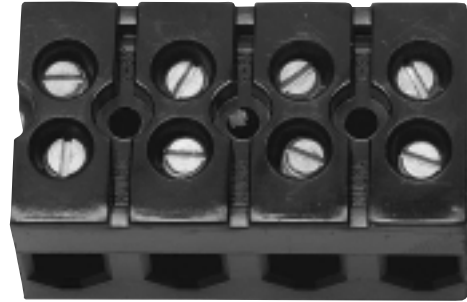

Specifications

Base, General Purpose Phenolic, 150° C

Connector, Aluminum, Tin Plated

Screws, Steel, Nickel Plated

Wire Range #4 to #18 Awg Copper Wire — 85 Amps

Multiple Wire Combinations for Solid or Stranded Copper Wire Are:

1 #18 Awg to 1 #4 Awg	2 to 6 #14 Awg
2 #8 Awg	2 to 6 #16 Awg
2 to 4 #10 Awg	2 to 8 #18 Awg
2 to 4 #12 Awg	

.625 Center-Line Spacing

UL Recognized File No. E47811

CSA Certified File No. LR19766

CC - Wire Range Reduced #6-#18 Awg

Catalog #	# of Poles	A	B
985 GP 02	2	—	1.156
985 GP 03	3	.625	1.781
985 GP 04	4	1.250	2.406
985 GP 05	5	1.875	3.031
985 GP 06	6	2.500	3.656
985 GP 07	7	3.125	4.281
985 GP 08	8	3.750	4.906
985 GP 09	9	4.375	5.531
985 GP 10	10	5.000	6.156
985 GP 11	11	5.625	6.781
985 GP 12	12	6.250	7.406

