


39TB-Military Class (MIL-T-55164/3)

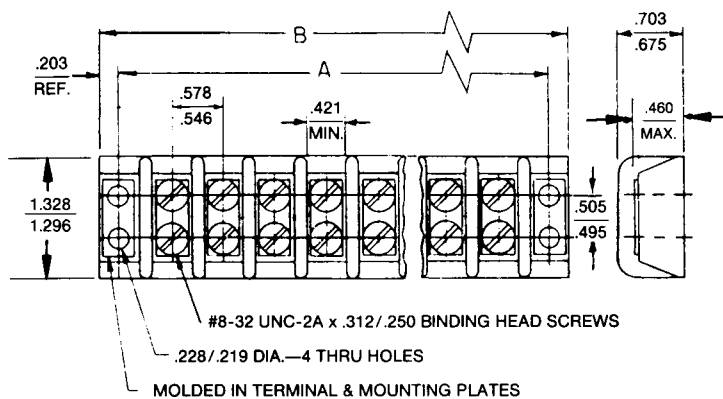

Molded Material:

Plastic: Grade F temperature rating 150 C per Mil-M-14

Screws: Brass per QQ-W-321, nickel plate per QQ-N-290

Terminal Plates: Brass per QQ-B-613, nickel plated per QQ-N-290

Electrical Rating:


Rated voltage (maximum): 600 volts

Current rating: 30 Amps

D.W.V.: 4000 volts RMS

Military Type Designation	Dimension B	Dimension A
39TB02F	2.047-2.140	1.672-1.719
39TB03F	2.626-2.719	2.234-2.281
39TB04F	3.188-3.281	2.796-2.843
39TB05F	3.750-3.843	3.359-3.406
39TB06F	4.313-4.406	3.922-3.969
39TB07F	4.876-4.969	4.484-4.531
39TB08F	5.438-5.531	5.046-5.093
39TB09F	6.000-6.109	5.625-5.672
39TB10F	6.563-6.672	6.172-6.250
39TB11F	7.126-7.235	6.719-6.797
39TB12F	7.688-7.797	7.297-7.375
39TB13F	8.250-8.359	7.860-7.938
39TB14F	8.813-8.922	8.422-8.500
39TB15F	9.376-9.485	8.985-9.063
39TB16F	9.938-10.047	9.547-9.625
39TB17F	10.500-10.609	10.110-10.188
39TB18F	11.079-11.188	10.672-10.750

40TB-Military Class (MIL-T-55164/4)

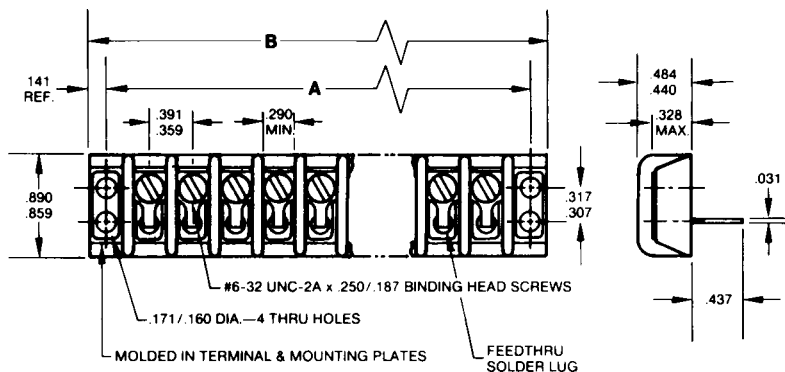

Molded Material:

Same as 37 TB Class

Hardware: Lug, Brass per QQ-B-613, tin plated

Electrical Rating:

Rated voltage (maximum): 300 volts

Current rating: 7.5 Amps

(D.W.V.): 3000 volts RMS

Military Type Designation	Dimension B	Dimension A
40TB02F	1.360-1.453	1.109-1.156
40TB03F	1.735-1.828	1.484-1.531
40TB04F	2.110-2.203	1.859-1.906
40TB05F	2.500-2.593	2.234-2.281
40TB06F	2.876-2.969	2.609-2.656
40TB07F	3.250-3.343	2.984-3.031
40TB08F	3.626-3.719	3.359-3.406
40TB09F	4.000-4.093	3.734-3.781
40TB10F	4.376-4.469	4.109-4.156
40TB11F	4.750-4.843	4.484-4.531
40TB12F	5.126-5.219	4.859-4.906
40TB13F	5.500-5.593	5.234-5.281
40TB14F	5.876-5.969	5.609-5.656
40TB15F	6.250-6.365	5.969-6.047
40TB16F	6.626-6.735	6.344-6.422
40TB17F	7.000-7.109	6.719-6.797
40TB18F	7.376-7.485	7.094-7.172
40TB19F	7.752-7.812	7.469-7.547
40TB20F	8.127-8.187	7.844-7.922
40TB21F	8.502-8.562	8.219-8.297
40TB22F	8.877-8.937	8.594-8.672
40TB23F	9.252-9.312	8.969-9.047
40TB24F	9.627-9.687	9.344-9.422
40TB25F	10.002-10.062	9.719-9.797
40TB26F	10.377-10.437	10.094-10.172
40TB27F	10.752-10.812	10.469-10.547
40TB28F	11.127-11.187	10.844-10.922
40TB29F	11.502-11.562	11.219-11.297
40TB30F	11.877-11.937	11.594-11.672
40TB31F	12.252-12.312	11.969-12.047