

# Class CC Enclosed Fuse Holders - 600 Volt


## Specifications:

- Has Been Tested & Approved for 200,000 Amp Interrupting Capacity
- Touchsafe Design IEC Type IP2
- DIN Rail Mount (35mm)
- Blown Fuse Indication Available
- Handle Allows Quick Easy Fuse Change
- Ventilated Design for Cooler Operation
- UL Listed File No. E35113
- IEC Type IP2 Protection
- Certified File No. LR21455
- CE



Catalog #	Indicating	Poles	Amp	Base Materials	Wire Range	Fuse Size	Fuses
6SC30A1	NO	1	30	Thermoplastic	#6-#14 AWG CU	13/32" DIA BY 1 1/2"	ATDR
6SC30A2		2					ATMR
6SC30A3		3					ATQR
6SC30A4		4					CCMR
6SC30A1I	YES	1					FRQ-R
6SC30A2I		2					KLDR
6SC30A3I		3					KLKR
6SC30A4I		4					KTK-R, LP-CC

Dimensions	mm	inches
A	17.8	0.70
B	35.6	1.40
C	53.3	2.10
D	71.1	2.80
E	43.2	1.70
F	61.0	2.40
G	9.90	0.39
H	78.2	3.08

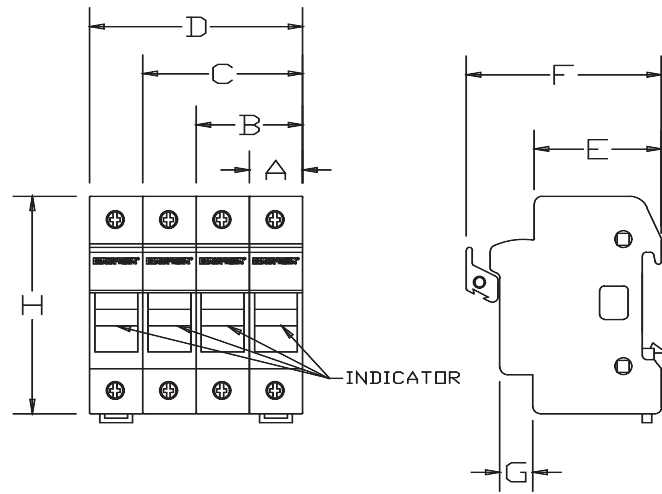

Pin kit (used for ganging multiple poles)

Catalog Description  
EFH-MCCK

- includes 10 handle pins and 20 body clips

\*use one handle pin and two body clips per pole