


Power Stud to Distribution Blocks

600 Volts AC/DC Up to 1000 Volts AC/DC (CE)⁺

Specifications:

- Connector, High Conductive Aluminum, Tin Plated, Rated for Copper and Aluminum Wire
- Stud, Brass, Tin Plated, Metric (M) Studs, Steel - intended for wires terminated with crimp lugs
- Amp Rating Based on NEC Table 310-16 Using 75°C Copper Wire
- Rated for multiple wire lugs, where applicable
- Multiple wire rating - refer to datasheets for details
- UL Recognized File No. XCFR2.E62806
- CSA Certified File No. LR19766
- **CE**
- Flexible Stranded Wire Compliant
- RoHS Compliant
- **For detailed SCCR information with fuses and circuit breakers, please refer to datasheets on**

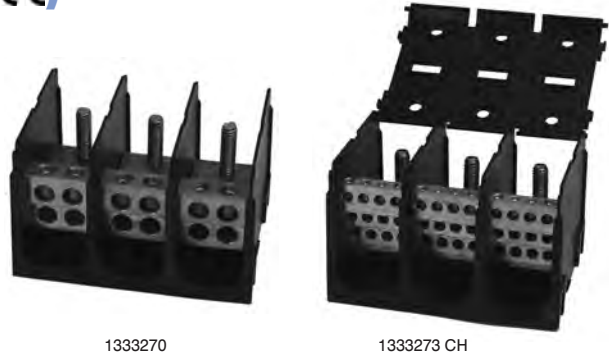

+ Refer to www.marathonsp.com/PDFs/1000VCRating.pdf for details on availability of CE voltage ratings greater than 600 Volts

Replace "X" with # of poles

Catalog #	Hinge Cover	Poles (X)	Amps	MATERIAL		LINE SIDE			LOAD SIDE		
				Insulator	Conn.	Threaded Stud Size	Openings Per Pole	Connector Configuration	Wire Range AWG/kcmil	Openings Per Pole	Connector Configuration
133X272	CH	1/2/3	510	Plastic	AL	3/8-16 x 1 3/16"	1		#4 - #14 AWG	12	
133X273	CH	1/2/3	510	Plastic	AL	M10 x 30	1		#4 - #14 AWG	12	
133X280	CH	1/2/3	510	Plastic	AL	3/8-16 x 1 3/16"	1		#2 - #14 AWG	8	
133X281	CH	1/2/3	510	Plastic	AL	M10 x 30	1		#2 - #14 AWG	8	
133X270	CH	1/2/3	510	Plastic	AL	3/8-16 x 1 3/16"	1		2/0 - #14 AWG	4	
133X271	CH	1/2/3	510	Plastic	AL	M10 x 30	1		2/0 - #14 AWG	4	
145X282*		1/2/3	760	Phenolic	AL	3/8-16 x 1.00	2		2/0 - #14 AWG	8	

CH = Block is also available with hinge cover attached - include "CH" at end of part number when ordering - See page 58 for available covers

See pages 55-57 for dimensional information

*cURus only