

Class R Fuse Holders - 250 Volt

Specifications:

Have Been Tested & Approved for
200,000 Amp Interrupting Capacity
Patented Cool Clip® Design
UL Listed File No. E35113
CSA Certified File No. LR21455
CE

30 & 60 Amp


Clip, Copper Alloy, Tin Plated, with
Patented Reject Member

100 & 200 Amp

Clip, One Piece Aluminum, Tin Plated,
with Reject Pin

400 & 600 Amp

Clip, Copper Alloy, Tin Plated
with Reject Pin

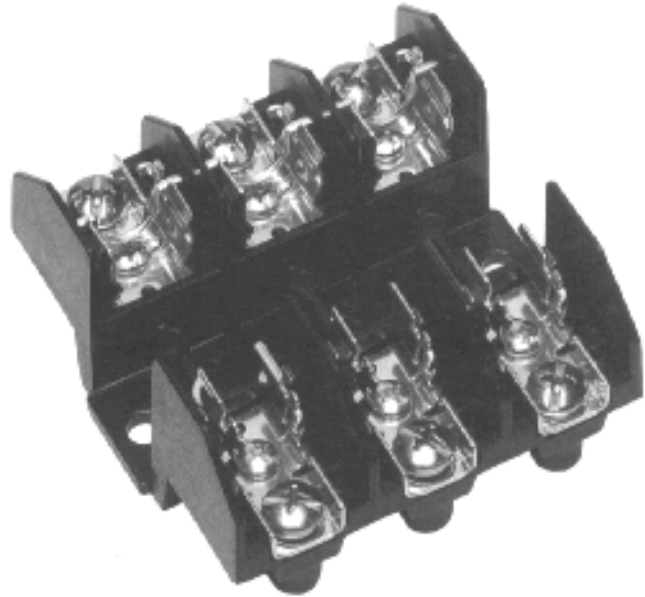

Catalog#:

<u>Std.</u>	<u>Reinforced</u>	<u>Poles</u>	<u>Amp</u>	<u>Base Materials</u>	<u>Wire Range</u>	<u>Fuse Size</u>
R30A1S	SAME	1	30	Thermoplastic	#10-#22 AWG CU	
R30A2S	SAME	2				
R30A3S	SAME	3				
R30A1SP	SAME	1	30	Thermoplastic	#10-#14 AWG CU	9/16"
R30A2SP	SAME	2				DIA BY
R30A3SP	SAME	3				2"
R30A1B	SAME	1	30	Thermoplastic	#6-#14 AWG CU	
R30A2B	SAME	2				
R30A3B	SAME	3				
R60A1S*	SAME	1	60	Thermoplastic	#10-#22 AWG CU	
R60A2S*	SAME	2				
R60A3S*	SAME	3				
R60A1B	SAME	1	60	Thermoplastic	#2-#14 AWG CU	13/16"
R60A2B	SAME	2			#2-#12 AWG AL	DIA BY
R60A3B	SAME	3				3"
R100A1B	SAME	1	100	Phenolic	#2/0-#14 AWG CU	1" DIA
R100A2B	SAME	2			#2/0-#12 AWG AL	BY
R100A3B	SAME	3				5 7/8"
R200A1BE	SAME	1	200	Polyester	250 MCM-	1 1/2" DIA
R200A3BE	SAME	3			#6 AWG CU AL	BY 7 1/8"
R400A1B	SAME	1	400	Phenolic	(2) 350 MCM-	2 13/32" DIA
R400A3B	SAME	3			#1/0 AWG CU AL	BY 8 5/8"
R600A3B	N/A	1	600	Phenolic	(2) 500 MCM-	2 29/32" DIA
R600A3B	N/A	3			#1/0 AWG CU AL	BY 10 3/8"

***UL Recognized File No. E35113**