

# Class R Fuse Holders - 600 Volt

## Specifications:

Have Been Tested and Approved for  
200,000 Amp Interrupting Capacity  
Patented Cool Clip® Design  
UL Listed File No. E35113  
CSA Certified File No. LR21455  
CE

## 30 & 60 Amp


Clip, Copper Alloy, Tin Plated, with  
Patented Reject Member

## 100 & 200 Amp

Clip, One Piece Aluminum, Tin Plated  
With Reject Pin

## 400 & 600 Amp

Clip, Copper Alloy, Tin Plated  
With Reject Pin

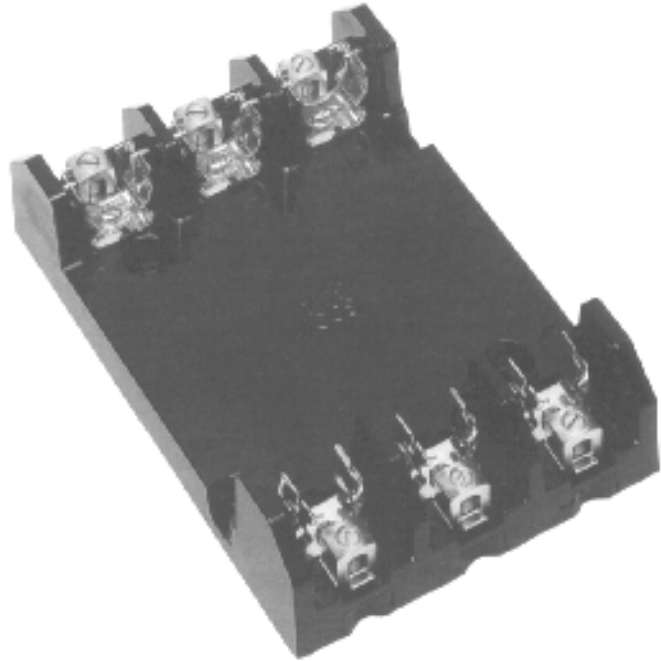

## Catalog #:

<u>Std.</u>	<u>Reinforced</u>	<u>Poles</u>	<u>Amp</u>	<u>Base Material</u>	<u>Wire Range</u>	<u>Fuse Size</u>
6R30A1S	SAME	1				
6R30A2S	SAME	2	30	Phenolic	#10-#22 AWG CU	
6R30A3S	SAME	3				
6R30A1SP	SAME	1				13/16"
6R30A2SP	SAME	2	30	Phenolic	#6-#14 AWG CU	DIA BY
6R30A3SP	SAME	3				5"
6R30A1B	SAME	1				
6R30A2B	SAME	2	30	Phenolic	#6-#14 AWG CU	
6R30A3B	SAME	3				
6R60A1B	SAME	1			#2-#14 AWG CU	1 1/16"
6R60A2B	SAME	2	60	Phenolic	#2-#12 AWG AL	DIA BY
6R60A3B	SAME	3				5 1/2"
6R100A1B	SAME	1			#2/0-#14 AWG CU	1" DIA
6R100A2B	SAME	2	100	Phenolic	#2/0-#12 AWG AL	BY
6R100A3B	SAME	3				7 7/8"
6R200A1BE	SAME	1	200	Polyester	250 MCM-	1 3/4"
6R200A3BE	SAME	3			#6 AWG CU AL	DIA BY
						9 5/8"
6R400A1B	SAME	1	400	Phenolic	(2) 350 MCM-	2 29/32"
6R400A3B	SAME	3			#1/0 AWG CU AL	DIA BY
						11 5/8"
6R600A1B	N/A	1	600	Phenolic	(2) 500 MCM-	3 7/16"
6R600A3B	N/A	3			#1/0 AWG CU AL	DIA BY
						13 3/8"