

Class T Fuse Holders - 600 Volt

Specifications:

Have Been Tested and Approved for
200,000 Amp Interrupting Capacity
Patented Cool Clip® Design
UL Listed File No. E35113
CSA Certified File No. LR21455
C E

30 & 60 Amp

Clip, Copper Alloy, Tin Plated,
with Patented Reject Member

100 Amp


Connector, One Piece Aluminum with
Integral Heat Sink, Tin Plated Bolt
1/4" - 20 X 1/2" Hex Head
1/4" Belleville Washer

200 Amp

Connector, One Piece Aluminum with
Integral Heat Sink, Tin Plated Bolt,
5/16" - 18 X 3/4" Hex Head
5/16" Belleville Washer

400 & 600 Amp

Connector, One Piece Aluminum with
Integral Heat Sink, Tin Plated Bolt
3/8" - 16 X 3/4" Hex Head
3/8" Belleville Washer

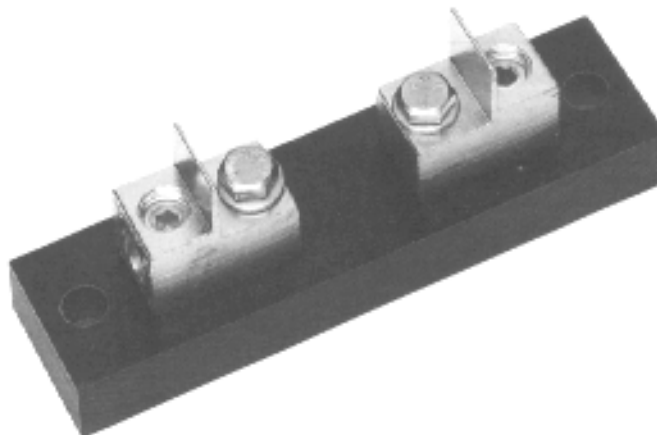

Catalog #:

<u>Std.</u>	<u>Reinforced</u>	<u>Poles</u>	<u>Amp</u>	<u>Base Material</u>	<u>Wire Range</u>	<u>Fuse Size</u>
6T30A2S 6T30A3S	R6T30A2S R6T30A3S	2 3	30	Phenolic	#10-#22 AWG CU	
6T30A2SP 6T30A3SP	R6T30A2SP R6T30A3SP	2 3	30	Phenolic	#10-#14 AWG CU	9/16" DIA BY 1 1/2"
6T30A2B 6T30A3B	R6T30A2B R6T30A3B	2 3	30	Phenolic	#2-#14 AWG CU #2-#12 AWG AL	
R6T60A2B R6T60A3B	SAME SAME	2 3	60	Phenolic	#2-#14 AWG CU #2-#12 AWG AL BY 1 9/16"	13/16" DIA
6T100A1B 6T100A3B	N/A N/A	1 3	100	Phenolic	#2/0-#14 AWG CU #2/0-#12 AWG AL	13/16" DIA BY 2 61/64"
6T200A1B 6T200A3B	N/A N/A	1 3	200	Phenolic	250 MCM- #6 AWG CU AL	1 1/16" DIA BY 3 1/4"
6T400A1B	N/A	1	400	Phenolic	(2) 250 MCM-	1 39/64" DIA BY 3 5/8"
6T600A1B	N/A	1	600	Phenolic	#6 AWG CU AL	2 5/64" DIA BY 3 63/64"

Class T Dimensions

		FIGURE	A	B	C	D	E	F	G	H	I
T30A RT30A	2 pole 3 pole	FIG 1	1.12		SEE FIGURE #1						
T60A RT60A	2 pole 3 pole	FIG 1	1.28		SEE FIGURE #1						
T100A	1 pole 3 pole	FIG 2	5.25	1.37 4.12	1.87	4.5	0.375	0.69	NA 2.75	.203 DIA THRU .37 DIA C'BORE	7/16-20
T200A	1 pole 3 pole	FIG 2	7	1.5 4.5	2.25	6.25	0.375	0.75	NA 3	.281 DIA THRU .50 DIA C'BORE	5/8-18
T400A	1 pole	FIG 3	8.12	2.25	2.37	7.37	0.375	1.12		.28 DIA THRU .50 DIA X .43 C'BORE	
T600A	1 pole	FIG 4	8.75	2.75	2.62	8.06	0.345	0.375	2	.28 DIA THRU .50 DIA X .43 C'BORE	

		FIGURE	A	B	C	D	E	F	G	H	I
6T30A R6T30A	2 pole 3 pole	FIG 5	1.28		SEE FIGURE #5						
6T60A R6T60A	2 pole 3 pole	FIG 5	1.74		SEE FIGURE #5						
6T100A	1 pole 3 pole	FIG 2	6.06	1.37 4.12	1.87	5.31	0.375	0.69	NA 2.75	.203 DIA THRU .37 DIA C'BORE	7/16-20
6T200A	1 pole 3 pole	FIG 2	7.75	1.5 4.5	2.25 4.5	7	0.375	0.75	NA 3	.281 DIA THRU .50 DIA C'BORE	5/8-18
6T400A	1 pole	FIG 3	9	2.25	2.37	8.25	0.375	1.12		.28 DIA THRU .50 DIA X .43 C'BORE	
6T600A	1 pole	FIG 4	9.75	2.75	2.62	9	0.375	0.375	2	.28 DIA THRU .50 DIA X .43 C'BORE	

Class T Dimensions

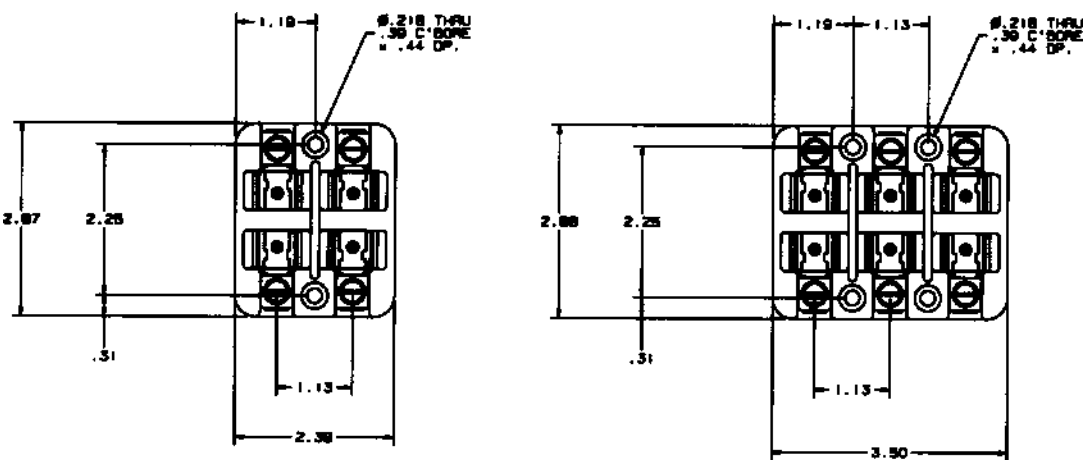


FIGURE 1

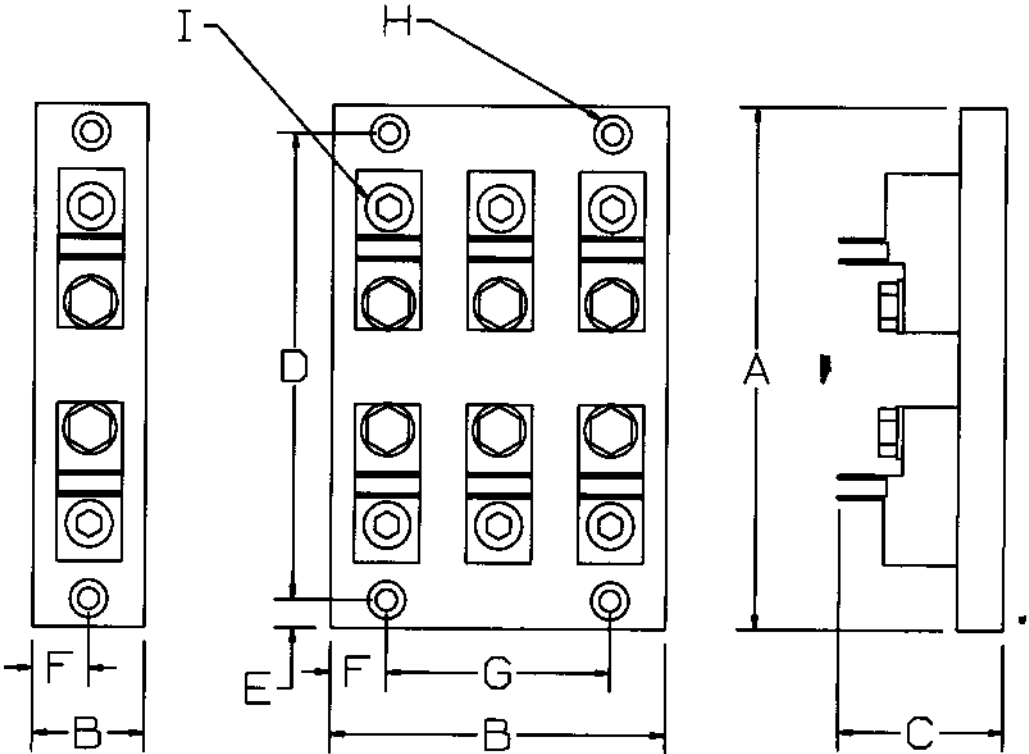
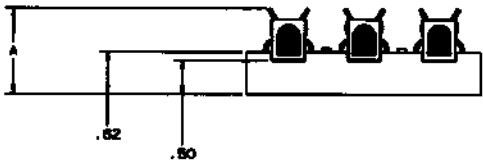


FIGURE 2

Class T Dimensions

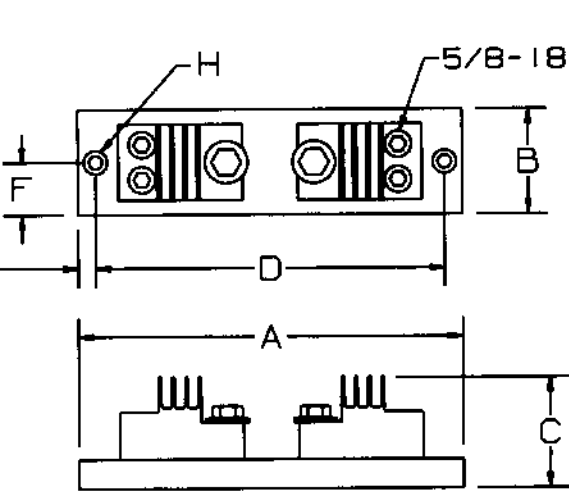


FIGURE 3

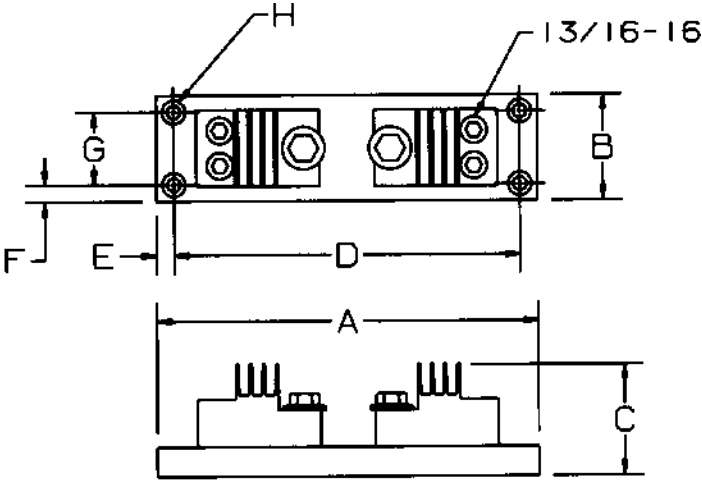


FIGURE 4

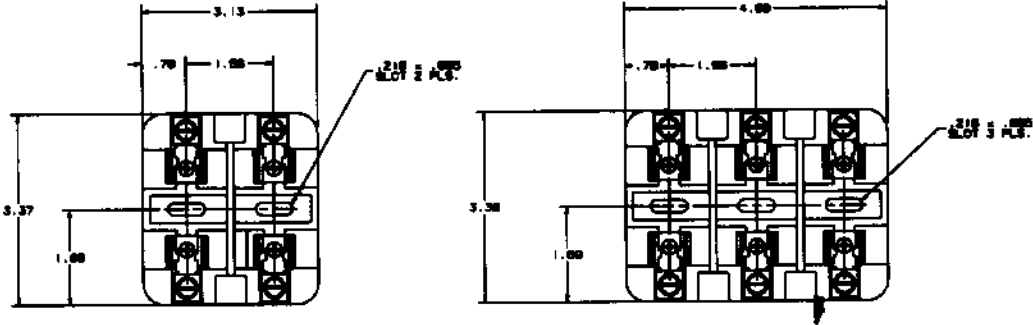


FIGURE 5

