



Features:

- Motor: Capacitor-Run Induction Motor
- Motor Protection: Thermal Protected
- Bearing Type: Two Ball
- Connection: UL 1015 AWG 20, 300mm Wire Leads or Terminal
- Frame Material: Aluminum Alloy
- Impeller Material: Plastic UL94V-0
- Operating Temp:
Two Ball: -10°C~70°C
- Life Expectancy:
Two Ball: 50,000 Hours



Fan-S Division




| Model No. | Volt. | Freq. | Current | Power | Rated Speed | Maximum AirFlow | | Maximum Static Pressure | | Noise Level | Weight |
|--------------------|-------|-------|-----------|-------------|-------------|-----------------|---------|-------------------------|---------------|-------------|--------|
| | (VAC) | (Hz) | (A) | (W) | (rpm) | (CMM) | (CFM) | (InAq) | (mmAq) | (dB/A) | (g) |
| FKA2-20572NBH** 3F | 115 | 50/60 | 0.60/0.88 | 67.90/100.0 | 2800/3200 | 16.98/18.819 | 600/665 | 0.930/0.500 | 23.622/12.700 | 72.0/75.4 | 2100 |
| FKA2-20572QBH** 3F | 230 | 50/60 | 0.32/0.47 | 63.20/95.20 | 2800/3200 | 16.98/18.819 | 600/665 | 0.930/0.500 | 23.622/12.700 | 72.0/75.4 | 2100 |

** Indicates "W" (Wire Leads) or "T" (Terminal)

Noise is measured at the distance of one (1) meter from the axis of intake.

50Hz

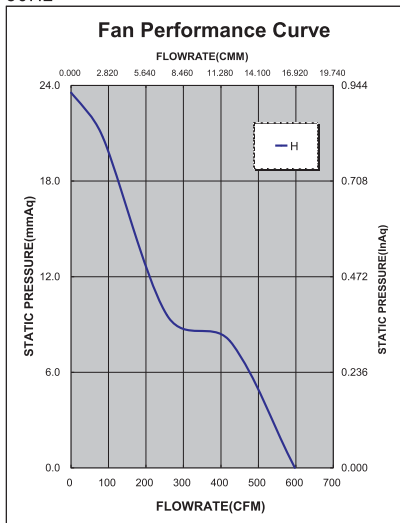

60Hz

