


Series CA4-9 & Series CAU4-9 (Contactors & Reversing Contactors)

- Dimensions are in millimeters (inches)
- Dimensions not intended for manufacturing purposes

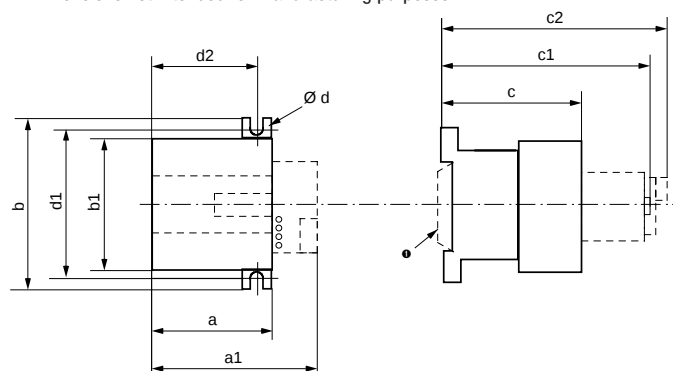


Type	a	a1	b	b1	c	c1	c2	Ød	d1	d2
CA4-9	45	67	56	47	48	74	77	4.2	50	40
	(1-25/32)	(2-21/32)	(2-3/16)	(1-14/16)	(1-29/32)	(2-15/16)	(3-1/16)	(11/64)	(1-31/32)	(1-9/16)


Reversing Contactors & Accessories

Contactor with...	Dim. [mm]	Dim. [inches]
reversing with mechanical interlock	a+a	a+a
with aux. contact block	c1	c1
with timer	c2	c2
on contactor	a1	a1
at side of contactor	a+20	a + 1-25/32
with neutral terminal	c2	c2
with protection element	c..+5	c..+ 3/16
with nameplate		

Mounting Position

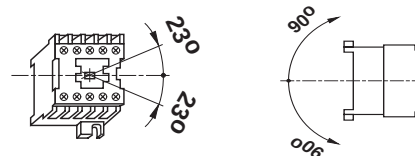

Series CAT4-9 & Series CAUT4-9 (Starters & Reversing Starters)

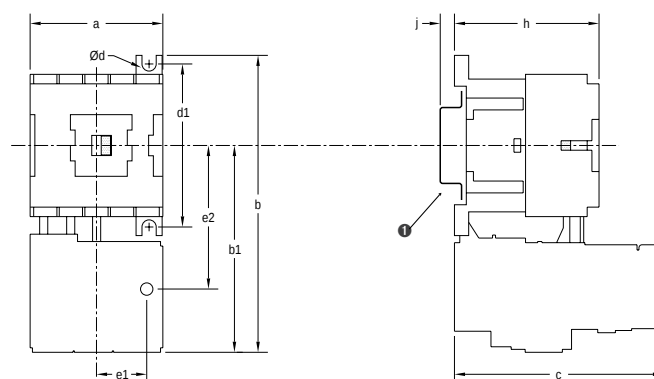

Type	a	b	b1	c	e2	d1	h	j	Ød
CA4-9 + CEP7-A/M/S	45	107	83	66.6	50	50	48.2	2	Two Ø 4.2
	(1-25/32)	(4-7/32)	(3-9/32)	(2-5/8)	(1-31/32)	(1-31/32)	(1-29/32)	(3/32)	(Two 11/64 Ø)
CA4-9 + CT4	45	98	70	86	40	50	48.2	2	Two Ø 4.2
	(1-25/32)	(3-7/8)	(2-3/4)	(3-13/32)	(1-19/32)	(1-31/32)	(1-29/32)	(3/32)	(Two 11/64 Ø)

Reversing Starters

Contactor	Dim. [mm]	Dim. [inches]
reversing with mechanical interlock	a+a	a+a

- ① Provision for mounting on a top hat rail (EN 50 022). Top hat and G-rail mounting not possible when using mechanical interlock.