## sprecher+ schuh

## **Auxiliary Contact Blocks (2 & 4 Pole)**

Contact Block	Description	NO	NC	Contact Arrangement	For use with	Catalog Number	Price
4-pole	<ul> <li>For mounting between T1 &amp; T2 or between T2 &amp; T3</li> <li>Adjustable; provides normal, delayed or overlapping contacts</li></ul>	2	2	13   21   31   43   44   22   32   44   Standard terminal marking for mounting between T1 & T2   53   61   71   83   54   62   72   84   Alternate terminal marking for mounting between T2 & T3	CA5-700 CA5-860	CA5-EF22 ❷	270
2-pole	For side mounting on either side of the contactor     Maximum four blocks per contactor	1	1	13   21   7   14   22   Standard terminal marking	CA5-1000 CA5-1200	CA5-EB11 <b>⊕</b>	430

## **Switched Neutral (4th Pole)**

4th Pole	4th Pole Amperes	For use with	Catalog Number	Price
		CA5-700	CA5-NP500/6	630
TO SECOND	500	CA5-860		
		CA5-1000	CA5-NP500/7	915
		CA5-1200		
		CA5-700	CA5-NP900/6	830
100	900	CA5-860		
		CA5-1000	CA5-NP900/7	1250
		CA5-1200		

<sup>•</sup> Further information on adjustable contacts can be found under "Auxiliary Contacts" in the CA5 Technical Section.


<sup>2</sup> Contactor comes standard with one 4-pole aux contact block.

In addition to one standard two-pole auxiliary contact block (CA5-EB11), CA5-1000 & 1200 contactors are equipped from the factory with a special two pole auxiliary contact block (CA5-EB11DC). One of the poles is used for operation of the Feeder Group/Coil mechanism, the other NC contact is available for use. Two additional aux contact blocks may be added for a total of four.

CA5

## **Mechanical Interlock Kit 1**

**sprecher+ schuh** 

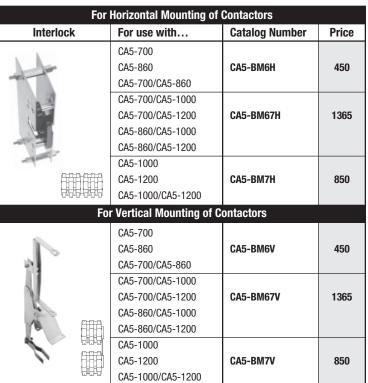

Kit includes interlock, mounting pan/rails (if applicable) and all necessary hardware.