


Series CA6 & Series CAU6 (Contactors & Reversing Contactors)

- Dimensions are in millimeters (inches)
- Dimensions not intended for manufacturing purposes

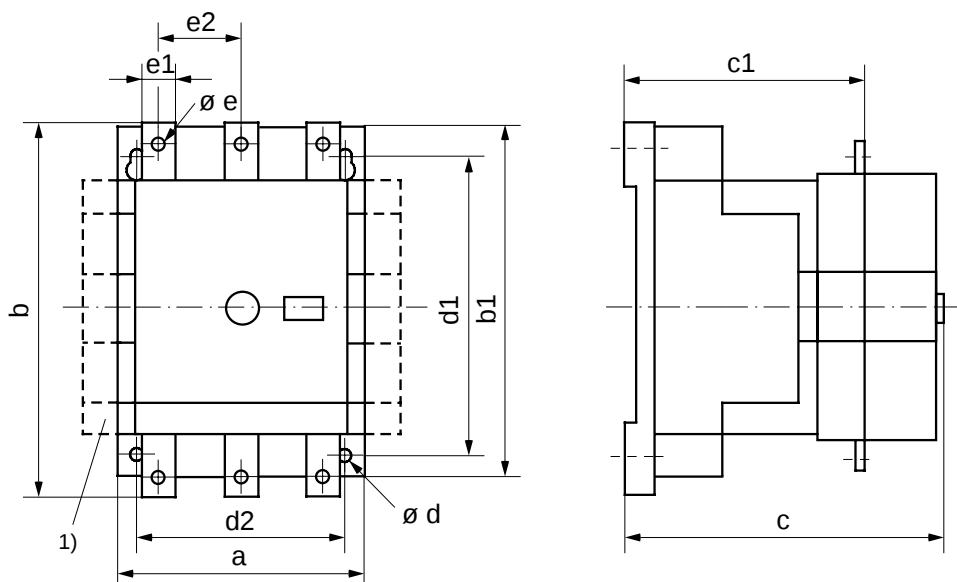


Catalog Number	a	b	b1	c	c1	Ød	d1	d2	Øe	e1	e2
CA6-85 & CA6-105	120 (4-3/4)	165 (6-1/2)	170 (6-11/16)	156 (6-1/8)	110.4 (4-11/32)	5.2 (15/64)	145 (5-11/16)	100 (3-15/16)	M6	16 (5/8)	38.5 (1-17/32)
CA6-105(-EI) ; CA6-140(-EI) ; CA6-170-EI	120 (4-3/4)	182 (7-5/32)	170 (6-11/16)	156 (6-1/8)	110.4 (4-11/32)	5.2 (7/32)	145 (5-11/16)	100 (3-15/16)	M8	20 (13/16)	39 (1-35/64)
CA6-210-EI...CA6-420-EI	155 (6-1/8)	222 (8-3/4)	205 (8-1/16)	180 (7-3/32)	110.4 (4-11/32)	6.5 (9/32)	180 (7-3/32)	130 (5-1/8)	M10	25 (1)	48 (1-7/8)

Reversing Contactors & Accessories (+...)

Contactor with...	CA6...	Dimension [mm]	Dimension [inches]
- auxiliary contact block ❶	+ P1 and/or P2	a	a
	+ P3 or P4	a + 13.5mm each	a + 9/32 each
- reversing w/mechanical interlock		a + a	a + a
- main terminal set	HB1	b + 7mm each	b + 19/64 each
	HB2	b + 7mm each	b + 19/64 each
	HB3	b + 8.5mm each	b + 11/32 each
- terminal cover	HA1	b + 20...40mm each	b + 25/32...1-9/16 each
	HA2	b + 15...40mm each	b + 19/32...1-9/16 each
	HA3	b + 11...50mm each	b + 7/16...1-31/32 each
- label holder		c + 5mm	c + 3/16

Mounting Position

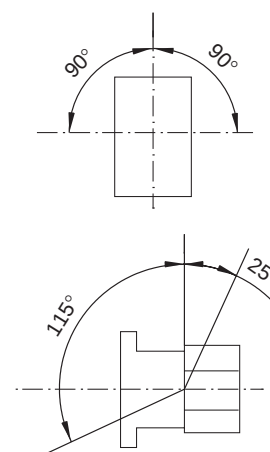

❶ No change of base dimensions with 1 or 2 auxiliary contact blocks (P1, P2). Each dimension increased by 13.5 mm with 3 or 4 auxiliary contact blocks (P3, P4).