


Omnimate Range - 5.08 mm Pitch



Pin headers SL-SMT 5.08/180G

new

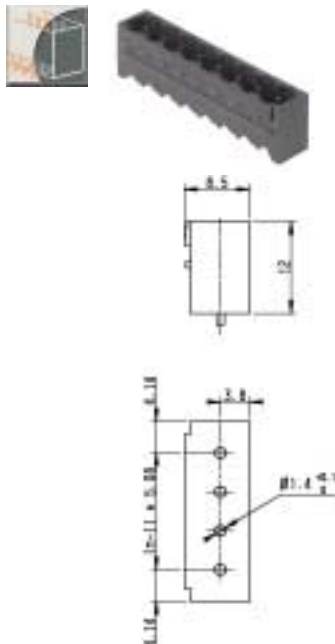

Technical data	VDE	UL	CSA
Rated voltage (V)	250*	300	300
Rated current (A)	13	15	10

*Pollution severity 3 / Overvoltage category III
Additional technical data see page 215

Solder pin length 1.5 mm
Tape-on-Reel 
Color
Tape width 56 mm

Poles	Type	Part No.	Qty.
2	SL-SMT 5.08/2/180G	1775924001	200
3	SL-SMT 5.08/3/180G	1775934001	200
4	SL-SMT 5.08/4/180G	1775944001	200
5	SL-SMT 5.08/5/180G	1775954001	200
6	SL-SMT 5.08/6/180G	1775964001	200
7	SL-SMT 5.08/7/180G	1775974001	200

For detailed product and application information for SMT see chapter "Other Applications" page 176-183.

Other pole numbers and tape widths on request. Minimum order quantities may apply.

Accessories	Page
Mounting	188, 189
Marking	190
Coding	193
Miscellaneous	198

Technical data	VDE	UL	CSA
Rated voltage (V)	250*	300	300
Rated current (A)	13	15	10

*Pollution severity 3 / Overvoltage category III
Additional technical data see page 215

Solder pin length 1.5 mm
Tray 
Color

Poles	Type	Part No.	Qty.
2	SL-SMT 5.08/2/180G	1775924001	200
3	SL-SMT 5.08/3/180G	1775934001	200
4	SL-SMT 5.08/4/180G	1775944001	200
5	SL-SMT 5.08/5/180G	1775954001	200
6	SL-SMT 5.08/6/180G	1775964001	200
7	SL-SMT 5.08/7/180G	1775974001	200
8	SL-SMT 5.08/8/180G	1775984001	200
9	SL-SMT 5.08/9/180G	1775994001	200
10	SL-SMT 5.08/10/180G	1776004001	200
11	SL-SMT 5.08/11/180G	1776014001	200
12	SL-SMT 5.08/12/180G	1776024001	200

For detailed product and application information for SMT see chapter "Other Applications" page 176-183.

Other pole numbers available on request. Minimum order quantities may apply.

Accessories	Page
Mounting	188, 189
Marking	190
Coding	193
Miscellaneous	198

Technical data	VDE	UL	CSA
Rated voltage (V)	250*	300	300
Rated current (A)	13	15	10

*Pollution severity 3 / Overvoltage category III
Additional technical data see page 215

Solder pin length 1.5 mm
Standard box 
Color

Poles	Type	Part No.	Qty.
2	SL-SMT 5.08/2/180G	1775922001	100
3	SL-SMT 5.08/3/180G	1775932001	100
4	SL-SMT 5.08/4/180G	1775942001	100
5	SL-SMT 5.08/5/180G	1775952001	50
6	SL-SMT 5.08/6/180G	1775962001	50
7	SL-SMT 5.08/7/180G	1775972001	50
8	SL-SMT 5.08/8/180G	1775982001	50
9	SL-SMT 5.08/9/180G	1775992001	50
10	SL-SMT 5.08/10/180G	1776002001	50
11	SL-SMT 5.08/11/180G	1776012001	50
12	SL-SMT 5.08/12/180G	1776022001	50
13	SL-SMT 5.08/13/180G	1776024001	50
14	SL-SMT 5.08/14/180G	1776025001	50
15	SL-SMT 5.08/15/180G	1776026001	50
16	SL-SMT 5.08/16/180G	1776027001	50
17	SL-SMT 5.08/17/180G	1776028001	20
18	SL-SMT 5.08/18/180G	1776029001	20
19	SL-SMT 5.08/19/180G	1776030001	20
20	SL-SMT 5.08/20/180G	1776031001	20
21	SL-SMT 5.08/21/180G	1776032001	20
22	SL-SMT 5.08/22/180G	1776033001	20
23	SL-SMT 5.08/23/180G	1776034001	20
24	SL-SMT 5.08/24/180G	1776035001	20

For detailed product and application information for SMT see chapter "Other Applications" page 176-183.

Accessories	Page
Mounting	188, 189
Marking	190
Coding	193
Miscellaneous	198