



Omnimate Range - 7.50 mm Pitch

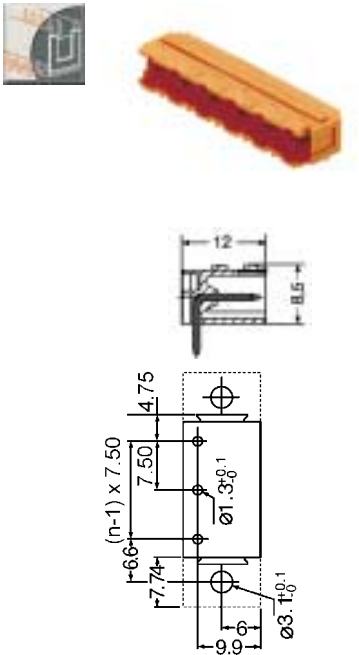

Pin headers SL 7.50/90

Pin headers SL 7.50/90B

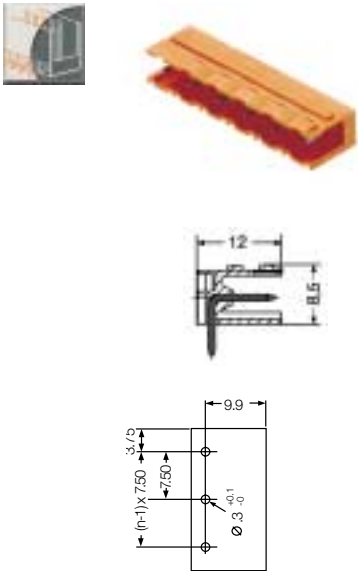

Technical data	VDE	UL	CSA
Rated voltage (V)	500*	300	300
Rated current (A)	15	15	15

*Pollution severity 3 / Overvoltage category III
Additional technical data see page 225

Technical data	VDE	UL	CSA
Rated voltage (V)	500*	300	300
Rated current (A)	15	15	15

*Pollution severity 3 / Overvoltage category III
Additional technical data see page 225

Solder pin length		3.2 mm	4.5 mm		
Color					
Poles	Type	Part No.	Part No.	Qty.	
2	SL 7.50/2/90	1628360000	1628690000	100	
3	SL 7.50/3/90	1628370000	1628700000	100	
4	SL 7.50/4/90	1628380000	1628710000	100	
5	SL 7.50/5/90	1628390000	1628720000	50	
6	SL 7.50/6/90	1628400000	1628730000	50	
7	SL 7.50/7/90	1628410000	1628740000	50	
8	SL 7.50/8/90	1628420000	1628750000	50	
9	SL 7.50/9/90	1628430000	1628760000	50	
10	SL 7.50/10/90	1628440000	1628770000	50	
11	SL 7.50/11/90	1628450000	1628780000	50	
12	SL 7.50/12/90	1628460000	1628790000	50	

Accessories	Page
Mounting	–
Marking	190
Coding	193
Miscellaneous	–

Solder pin length		3.2 mm	4.5 mm		
Color					
Poles	Type	Part No.	Part No.	Qty.	
2	SL 7.50/2/90B	1628470000	1628910000	100	
3	SL 7.50/3/90B	1628480000	1628920000	100	
4	SL 7.50/4/90B	1628490000	1628930000	100	
5	SL 7.50/5/90B	1628500000	1628940000	50	
6	SL 7.50/6/90B	1628510000	1628950000	50	
7	SL 7.50/7/90B	1628520000	1628960000	50	
8	SL 7.50/8/90B	1628530000	1628970000	50	
9	SL 7.50/9/90B	1628540000	1628980000	50	
10	SL 7.50/10/90B	1628550000	1628990000	50	
11	SL 7.50/11/90B	1628560000	1629000000	50	
12	SL 7.50/12/90B	1628570000	1629010000	50	

Accessories	Page
Mounting	187*
Marking	190
Coding	193
Miscellaneous	–