


Omnimate Range - 7.62 mm Pitch



Pin headers SL 7.62/180

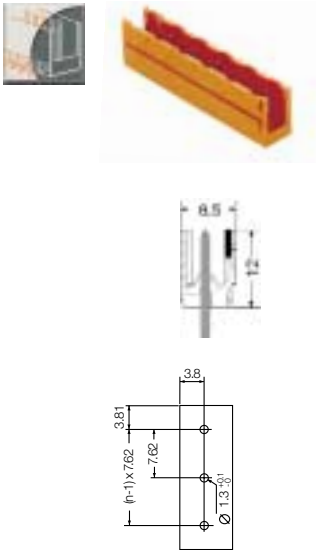


Technical data	VDE	UL	CSA
Rated voltage (V)	500*	300	300
Rated current (A)	15	15	15

*Pollution severity 3 / Overvoltage category III
Additional technical data see page 225

Solder pin length		3.2 mm	4.5 mm		
Color					
Poles	Type	Part No.	Part No.	Qty.	
2	SL 7.62/2/180	1625030000	1624700000	100	
3	SL 7.62/3/180	1625040000	1624710000	100	
4	SL 7.62/4/180	1625050000	1624720000	100	
5	SL 7.62/5/180	1625060000	1624730000	50	
6	SL 7.62/6/180	1625070000	1624740000	50	
7	SL 7.62/7/180	1625080000	1624750000	50	
8	SL 7.62/8/180	1625090000	1624760000	50	
9	SL 7.62/9/180	1625100000	1624770000	50	
10	SL 7.62/10/180	1625110000	1624780000	50	
11	SL 7.62/11/180	1625120000	1624790000	50	
12	SL 7.62/12/180	1625130000	1624800000	50	

Accessories	Page
Mounting	–
Marking	190
Coding	193
Miscellaneous	–

Pin headers SL 7.62/180B

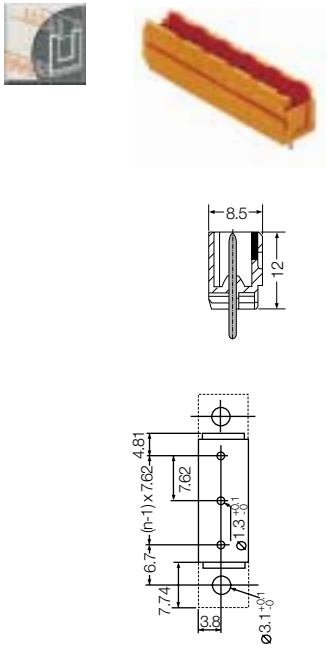

Technical data	VDE	UL	CSA
Rated voltage (V)	500*	300	300
Rated current (A)	15	15	15

*Pollution severity 3 / Overvoltage category III
Additional technical data see page 225

Solder pin length		3.2 mm	4.5 mm		
Color					
Poles	Type	Part No.	Part No.	Qty.	
2	SL 7.62/2/180B	1625250000	1624920000	100	
3	SL 7.62/3/180B	1625260000	1624930000	100	
4	SL 7.62/4/180B	1625270000	1624940000	100	
5	SL 7.62/5/180B	1625280000	1624950000	50	
6	SL 7.62/6/180B	1625290000	1624960000	50	
7	SL 7.62/7/180B	1625300000	1624970000	50	
8	SL 7.62/8/180B	1625310000	1624980000	50	
9	SL 7.62/9/180B	1625320000	1624990000	50	
10	SL 7.62/10/180B	1625330000	1625000000	50	
11	SL 7.62/11/180B	1625340000	1625010000	50	
12	SL 7.62/12/180B	1625350000	1625020000	50	

Accessories	Page
Mounting	187*
Marking	190
Coding	193
Miscellaneous	–