


Minimate Range- S2L/B2L 3.5 with Gold-Plated Contacts



Pin headers S2L 3.5/180

new

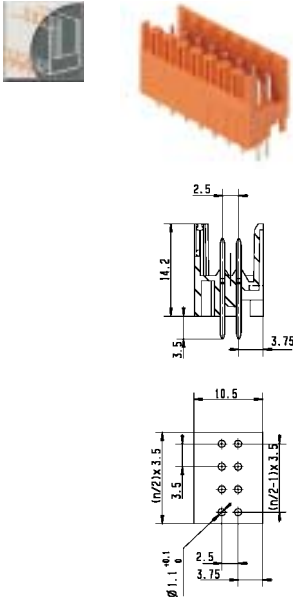

Technical data	VDE	UL	CSA
Rated voltage (V)	50*	150	50
Rated current (A)	7.5 ¹⁾	10	5

*Pollution severity 3 / Overvoltage category III
Additional technical data see page 210

Solder pin length		3.5 mm	3.5 mm		
gold-plated contacts					
Color					
Poles	Type	Part No.	Part No.	Qty.	
6	S2L 3.5/6/180 AU	1756640000	1756800000	50	
8	S2L 3.5/8/180 AU	1756650000	1756810000	50	
10	S2L 3.5/10/180 AU	1756660000	1756820000	50	
12	S2L 3.5/12/180 AU	1756670000	1756830000	50	
14	S2L 3.5/14/180 AU	1756680000	1756840000	50	
16	S2L 3.5/16/180 AU	1756690000	1756850000	50	
18	S2L 3.5/18/180 AU	1756700000	1756860000	20	
20	S2L 3.5/20/180 AU	1756710000	1756870000	20	
22	S2L 3.5/22/180 AU	1756720000	1756880000	20	
24	S2L 3.5/24/180 AU	1756730000	1756890000	20	
26	S2L 3.5/26/180 AU	1756740000	1756900000	20	
28	S2L 3.5/28/180 AU	1756750000	1756910000	20	
30	S2L 3.5/30/180 AU	1756760000	1756920000	20	
32	S2L 3.5/32/180 AU	1756770000	1756930000	20	
34	S2L 3.5/34/180 AU	1756780000	1756940000	20	
36	S2L 3.5/36/180 AU	1756790000	1756950000	20	


Minimum order quantity applies for gold-plated S2L 3.5.
Please consult factory for details.

¹⁾ 36 poles = max. 6.8 A

Accessories	Page
Mounting	–
Marking	190
Coding	193
Miscellaneous	198

Pin headers S2L 3.5/180G

new

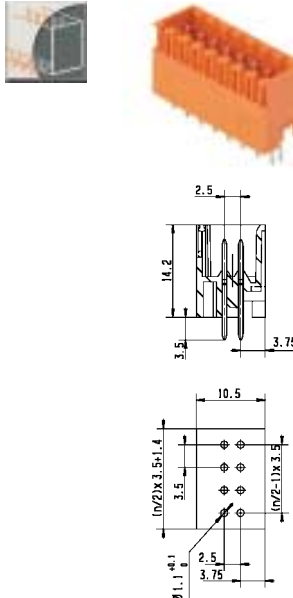

Technical data	VDE	UL	CSA
Rated voltage (V)	50*	150	50
Rated current (A)	7.5 ¹⁾	10	5

*Pollution severity 3 / Overvoltage category III
Additional technical data see page 210

Solder pin length		3.5 mm	3.5 mm		
gold-plated contacts					
Color					
Poles	Type	Part No.	Part No.	Qty.	
6	S2L 3.5/6/180G AU	1756320000	1756480000	50	
8	S2L 3.5/8/180G AU	1756330000	1756490000	50	
10	S2L 3.5/10/180G AU	1756340000	1756500000	50	
12	S2L 3.5/12/180G AU	1756350000	1756510000	50	
14	S2L 3.5/14/180G AU	1756360000	1756520000	50	
16	S2L 3.5/16/180G AU	1756370000	1756530000	50	
18	S2L 3.5/18/180G AU	1756380000	1756540000	20	
20	S2L 3.5/20/180G AU	1756390000	1756550000	20	
22	S2L 3.5/22/180G AU	1756400000	1756560000	20	
24	S2L 3.5/24/180G AU	1756410000	1756570000	20	
26	S2L 3.5/26/180G AU	1756420000	1756580000	20	
28	S2L 3.5/28/180G AU	1756430000	1756590000	20	
30	S2L 3.5/30/180G AU	1756440000	1756600000	20	
32	S2L 3.5/32/180G AU	1756450000	1756610000	20	
34	S2L 3.5/34/180G AU	1756460000	1756620000	20	
36	S2L 3.5/36/180G AU	1756470000	1756630000	20	


Minimum order quantity applies for gold-plated S2L 3.5.
Please consult factory for details.

¹⁾ 36 poles = max. 6.8 A

Accessories	Page
Mounting	–
Marking	190
Coding	193
Miscellaneous	198

Pin headers S2L 3.5/180F

new

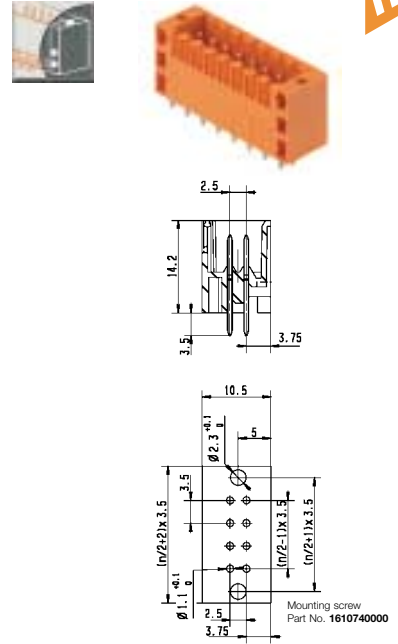

Technical data	VDE	UL	CSA
Rated voltage (V)	50*	150	50
Rated current (A)	7.5 ¹⁾	10	5

*Pollution severity 3 / Overvoltage category III
Additional technical data see page 210

Solder pin length		3.5 mm	3.5 mm		
gold-plated contacts					
Color					
Poles	Type	Part No.	Part No.	Qty.	
6	S2L 3.5/6/180F AU	1756960000	1757120000	50	
8	S2L 3.5/8/180F AU	1756970000	1757130000	50	
10	S2L 3.5/10/180F AU	1756980000	1757140000	50	
12	S2L 3.5/12/180F AU	1756990000	1757150000	50	
14	S2L 3.5/14/180F AU	1757000000	1757160000	50	
16	S2L 3.5/16/180F AU	1757010000	1757170000	50	
18	S2L 3.5/18/180F AU	1757020000	1757180000	20	
20	S2L 3.5/20/180F AU	1757030000	1757190000	20	
22	S2L 3.5/22/180F AU	1757040000	1757200000	20	
24	S2L 3.5/24/180F AU	1757050000	1757210000	20	
26	S2L 3.5/26/180F AU	1757060000	1757220000	20	
28	S2L 3.5/28/180F AU	1757070000	1757230000	20	
30	S2L 3.5/30/180F AU	1757080000	1757240000	20	
32	S2L 3.5/32/180F AU	1757090000	1757250000	20	
34	S2L 3.5/34/180F AU	1757100000	1757260000	20	
36	S2L 3.5/36/180F AU	1757110000	1757270000	20	

Minimum order quantity applies for gold-plated S2L 3.5.
Please consult factory for details.

¹⁾ 36 poles = max. 6.8 A

Accessories	Page
Mounting	188
Marking	190
Coding	193
Miscellaneous	198