Pin headers SLD 3.5V/180

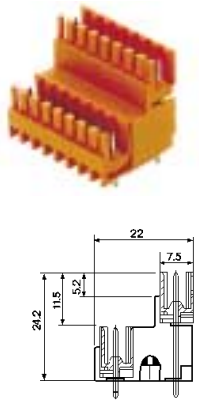

Mounting screw
Part No. **164096 0000**



L = (n/2–1) x 3.5

Technical data	VDE	UL	CSA
Rated voltage (V)	125*	300	300
Rated current (A)	8	10	10

*Pollution severity 3 / Overvoltage category III

Additional technical data see page 212

Solder pin length **3.2 mm** **4.5 mm**

Color

Poles	Type	Part No.	Part No.	Qty.
4	SLD 3.5 V/4/180	**1640980000**	**1641490000**	50
8	SLD 3.5 V/8/180	**1640990000**	**1641500000**	50
12	SLD 3.5 V/12/180	**1641000000**	**1641510000**	50
16	SLD 3.5 V/16/180	**1641010000**	**1641520000**	20
20	SLD 3.5 V/20/180	**1641020000**	**1641530000**	20
24	SLD 3.5 V/24/180	**1641030000**	**1641540000**	10
28	SLD 3.5 V/28/180	**1641040000**	**1641550000**	10
32	SLD 3.5 V/32/180	**1641050000**	**1641560000**	10
36	SLD 3.5 V/36/180	**1641060000**	**1641570000**	10
40	SLD 3.5 V/40/180	**1641070000**	**1641580000**	10
44	SLD 3.5 V/44/180	**1641080000**	**1641590000**	10
48	SLD 3.5 V/48/180	**1641090000**	**1641600000**	10

Accessories	Page
Mounting	188
Marking	190
Coding	193
Miscellaneous	–

Pin headers SLD 3.5V/180G

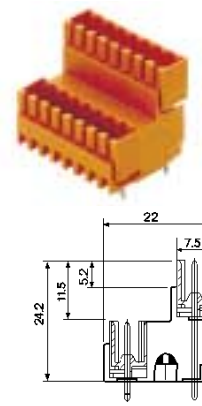

Mounting screw
Part No. **164096 0000**



L = (n/2–1) x 3.5

Technical data	VDE	UL	CSA
Rated voltage (V)	125*	300	300
Rated current (A)	8	10	10

*Pollution severity 3 / Overvoltage category III

Additional technical data see page 212

Solder pin length **3.2 mm** **4.5 mm**

Color

Poles	Type	Part No.	Part No.	Qty.
4	SLD 3.5 V/4/180G	**1641110000**	**1641730000**	50
8	SLD 3.5 V/8/180G	**1641120000**	**1641740000**	50
12	SLD 3.5 V/12/180G	**1641130000**	**1641750000**	50
16	SLD 3.5 V/16/180G	**1641140000**	**1641760000**	20
20	SLD 3.5 V/20/180G	**1641150000**	**1641770000**	20
24	SLD 3.5 V/24/180G	**1641160000**	**1641780000**	10
28	SLD 3.5 V/28/180G	**1641170000**	**1641790000**	10
32	SLD 3.5 V/32/180G	**1641180000**	**1641800000**	10
36	SLD 3.5 V/36/180G	**1641190000**	**1641810000**	10
40	SLD 3.5 V/40/180G	**1641200000**	**1641820000**	10
44	SLD 3.5 V/44/180G	**1641210000**	**1641830000**	10
48	SLD 3.5 V/48/180G	**1641220000**	**1641840000**	10

Accessories	Page
Mounting	188
Marking	190
Coding	193
Miscellaneous	–

Pin headers SLD 3.5V/180F

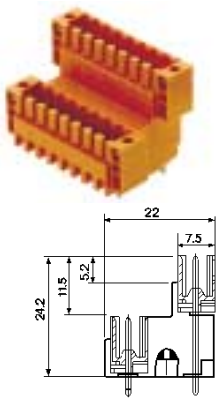

Mounting screw
Part No. **164096 0000**



L = (n/2–1) x 3.5

Mounting screw
Part No. **161074 0000**

Technical data	VDE	UL	CSA
Rated voltage (V)	125*	300	300
Rated current (A)	8	10	10

*Pollution severity 3 / Overvoltage category III

Additional technical data see page 212

Solder pin length **3.2 mm** **4.5 mm**

Color

Poles	Type	Part No.	Part No.	Qty.
4	SLD 3.5 V/4/180F	**1641240000**	**1641970000**	50
8	SLD 3.5 V/8/180F	**1641250000**	**1641980000**	50
12	SLD 3.5 V/12/180F	**1641260000**	**1641990000**	50
16	SLD 3.5 V/16/180F	**1641270000**	**1642000000**	20
20	SLD 3.5 V/20/180F	**1641280000**	**1642010000**	20
24	SLD 3.5 V/24/180F	**1641290000**	**1642020000**	10
28	SLD 3.5 V/28/180F	**1641300000**	**1642030000**	10
32	SLD 3.5 V/32/180F	**1641310000**	**1642040000**	10
36	SLD 3.5 V/36/180F	**1641320000**	**1642050000**	10
40	SLD 3.5 V/40/180F	**1641330000**	**1642060000**	10
44	SLD 3.5 V/44/180F	**1641340000**	**1642070000**	10
48	SLD 3.5 V/48/180F	**1641350000**	**1642080000**	10

Accessories	Page
Mounting	188
Marking	190
Coding	193
Miscellaneous	–